




ACHIEVING ASSEMBLY EXCELLENCE

2018
WWW.AIMCO-GLOBAL.COM

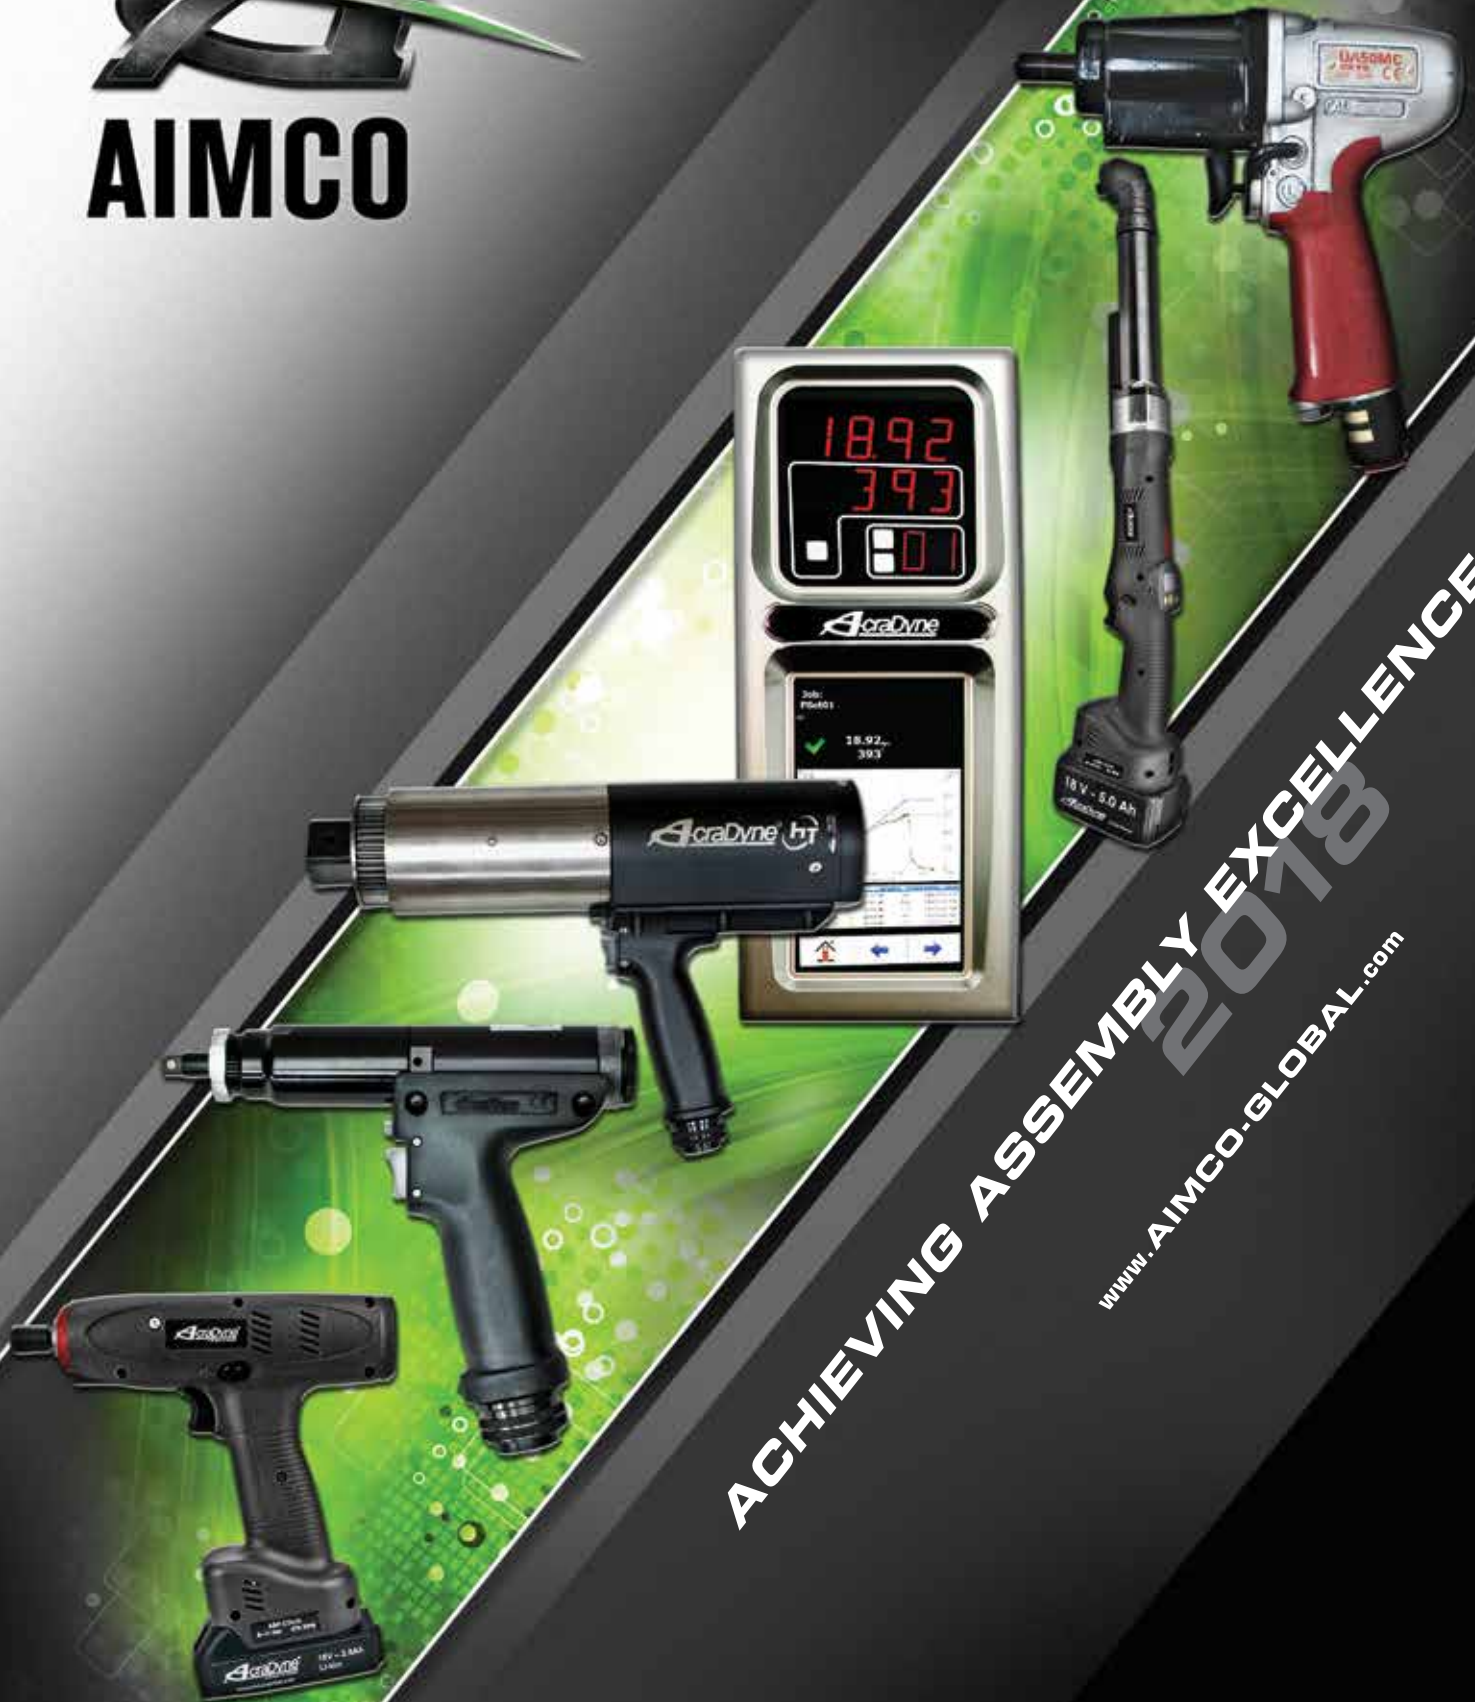

For over 40 years AIMCO has been working with manufacturers around the world. We are the complete global source for all critical fastening and bolting solutions. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA.**

TABLE OF CONTENTS

CONTROLLED TOOLS

ACRADYNE®

GEN IV ACE CONTROLLER PLATFORM	10
CONTROLLER SOFTWARE	17
1000 SERIES NUTRUNNERS	18
1000, 2000, & 5000 SERIES PISTOL GRIP NUTRUNNERS	20
2000, 3000, & 5000 SERIES ANGLE NUTRUNNERS	21
2000, 3000, & 5000 SERIES INLINE NUTRUNNERS	22
5000 SERIES FIXTURED NUTRUNNERS	23
TUBENUT NUTRUNNERS AND SPECIALTY GEARHEADS	24
HOLD & DRIVE NUTRUNNERS	25
MID-EXIT CABLE NUTRUNNERS	26
RIVET NUTRUNNERS	27
HT SERIES DC TOOLS	28
HT SERIES DC ANGLE TOOLS	29
HT SERIES DC DUAL LEVER TOOLS	30
HT SERIES NOSE EXTENSIONS AND GEARHEAD TOOLS	31
HT SERIES DC TOOL ACCESSORIES	32
DC TOOL / SPINDLE SELECTION GUIDE	34
CABLES AND ACCESSORIES	36
CORDLESS TOOLS	40
MULTIPLE NUTRUNNING SYSTEMS	42
AIMCO TOOL SPECIALS	43

URYU

UA-MC SERIES	44
UA-AMC SERIES	45
UEC-4800 CONTROLLERS	46
UDBP-AF SERIES	49
UEP-MC SERIES	51
UECD-4800 CONTROLLERS	52
UDP-MC / ACRA-PULSE MC SERIES	54
UECP-4800 CONTROLLERS	55
CONTROLLED PULSE TOOL ACCESSORIES	56
FIXTURED F-SERIES NUTRUNNERS	57

TORQUE MEASUREMENT

TORQUE MEASUREMENT OVERVIEW	61
TORQUE MEASUREMENT SYSTEMS	64
TORQUE MEASUREMENT TESTERS	65
TORQUE MEASUREMENT ANALYZERS	68
AUDITOR DATA COLLECTION SOFTWARE	71
HIGH-CAPACITY TEST STANDS	73
TORQUE WRENCHES	78
iTV TORQUE CARTS	86
iTV TORQUE CART DATA COLLECTION SOFTWARE	87
TRANSDUCERS	88
TORQUE MEASUREMENT CABLES	92

POWER TOOLS

ACRADYNE HT SERIES PNEUMATIC TOOLS	93
ACRADYNE HT SERIES HIGH-SPEED PNEUMATIC TOOLS	94
ACRADYNE HT SERIES PNEUMATIC TOOL ACCESSORIES	95
ACRADYNE HT SERIES BATTERY TOOLS	96
AIMCO PULSE TOOLS: OVERVIEW	98
OMEGA PULSE: UAT SERIES	100
OMEGA PULSE: UL / ULT SERIES	102
ACRA-PULSE® SERIES	103
BP-T PULSE SERIES CORDLESS TOOLS	106
UDBP-TA PULSE SERIES CORDLESS TOOLS	107
UDP-TA DIRECT PLUG-IN PULSE TOOLS	108
UAN & URW SERIES NUTRUNNERS	109
TUBENUT & GEARED NUTRUNNERS	110
DYNATORQUE MANUAL TORQUE MULTIPLIERS	111
US-LT PNEUMATIC SCREWDRIVERS	112
US & US-LD PNEUMATIC SCREWDRIVERS	114
SIGNATURE SERIES SHUT-OFF IMPACT CORDLESS TOOLS	115
SIGNATURE SERIES PRECISION CLUTCH CORDLESS TOOLS	116
ELECTRA® SERIES ELECTRIC SCREWDRIVERS	119
IMPACT TOOLS	122
GRINDERS	124
SANDERS & DRILLS	125
PERCUSSION TOOLS	126

ASSEMBLY SYSTEMS

SCREW PRESENTERS: OVERVIEW	127
A-50 SCREW PRESENTERS	128
ACRA-FEED AUTOMATIC SCREW FEED SYSTEMS	129

TOOL SUPPORT SYSTEMS

GRAVITY DEFYING BALANCERS	130
LINE REEL BALANCERS / RETRACTORS	131
ERGO-ARM® TOOL SUPPORT SYSTEMS	132
CUSTOM REACTION DEVICES	133
ERGO-ARM® ACCESSORIES / LINEAR ARM	133
GCI TORQUE REACTION ARMS	134
CARBON TORQUE ARMS / TUBES	136
WORKSTATION COMPONENTS AND ASSEMBLIES	138
AIR PREPARATION UNITS	140
AIR LINE	141
AIR LINE ACCESSORIES	142

FASTENER TOOLS

STANDARD FASTENER TOOLS	143
ERGO-DRIVE® SERIES E	146
CUSTOM / SPECIAL PARTS	148
CONVERSION CHARTS	152

INDEX	153
-----------------	-----



* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ERGO-DRIVE sockets are uniquely designed for repeatable, accurate rundowns. They also ensure excellent product quality, longer tool life, and better ergonomics for the tool user. Look for the ERGO-DRIVE **E** logo in this catalog to see where ERGO-DRIVE sockets/extensions benefit tool operation, operator, and rundown. See page 146 for ERGO-DRIVE details.



PRODUCTIVITY

The speed and efficiency of the assembly process

Every manufacturer wants to produce finished goods in the most cost-effective manner possible. Whether the customer is a large automotive manufacturer, building several hundred vehicles daily, or an electronics company producing individual, custom made components, AIMCO provides products and services that allow each company to work at their ideal pace in order to keep its processes running efficiently.



ERGONOMICS

The relationship between assembler and the assembly process

Employees are the most important assets of any company. Protecting these individuals from job related health issues is critical. To help its customers face the challenges surrounding ergonomics, AIMCO focuses on providing products that combine a lack of torque reaction, low vibration, light weight, as well as quiet and simple operation. These features allow assemblers to do their job in the safest possible manner and help manufacturers avoid the often hidden costs of workplace injuries.



RELIABILITY

The total cost of tool maintenance and repair

To keep production lines running, tools must perform reliably. AIMCO helps manufacturers face the challenges of maintenance, repair and lost labor time by offering products with superior workmanship and durability. By combining high quality products with a detailed and flexible service-training program, AIMCO ensures its tools will meet the customer's expectations of reliability.



QUALITY

The ability of the tool to adhere to process requirements

The most important challenge faced by many companies is meeting the customer's demands for quality. AIMCO provides assembly tools that have been tested and proven to meet the most stringent engineering specifications. AIMCO backs those tools up with its innovative Auditor torque measurement products. This allows manufacturers to focus on their most important goal — creating a quality product.






PERQ® is the industry-standard formula that matches the needs of manufacturers with the assembly tools they use in their processes.

AIMCO and its distributors evaluate each manufacturer based on the **PERQ** formula to determine that company's unique blend of the **PERQ** elements – productivity, ergonomics, reliability and quality – we then provide tooling options that will enhance that mix. The end result is a manufacturing process that runs efficiently, produces high quality products and does so at the lowest possible cost.

Combining **PERQ** with AIMCO's vast experience and unequalled service will enable any manufacturer to succeed in the global marketplace.

Each of the **PERQ** elements acts as a gear – each interacts with the others to affect the overall profitability of the manufacturing process. AIMCO looks at each step in the manufacturing process to determine the best type of tool, or equipment, for that application. Only AIMCO, with its extensive product lineup, can offer the manufacturer the ideal tool for the job, whether it be continuous drive or pulse tool, electric, pneumatic or battery powered.

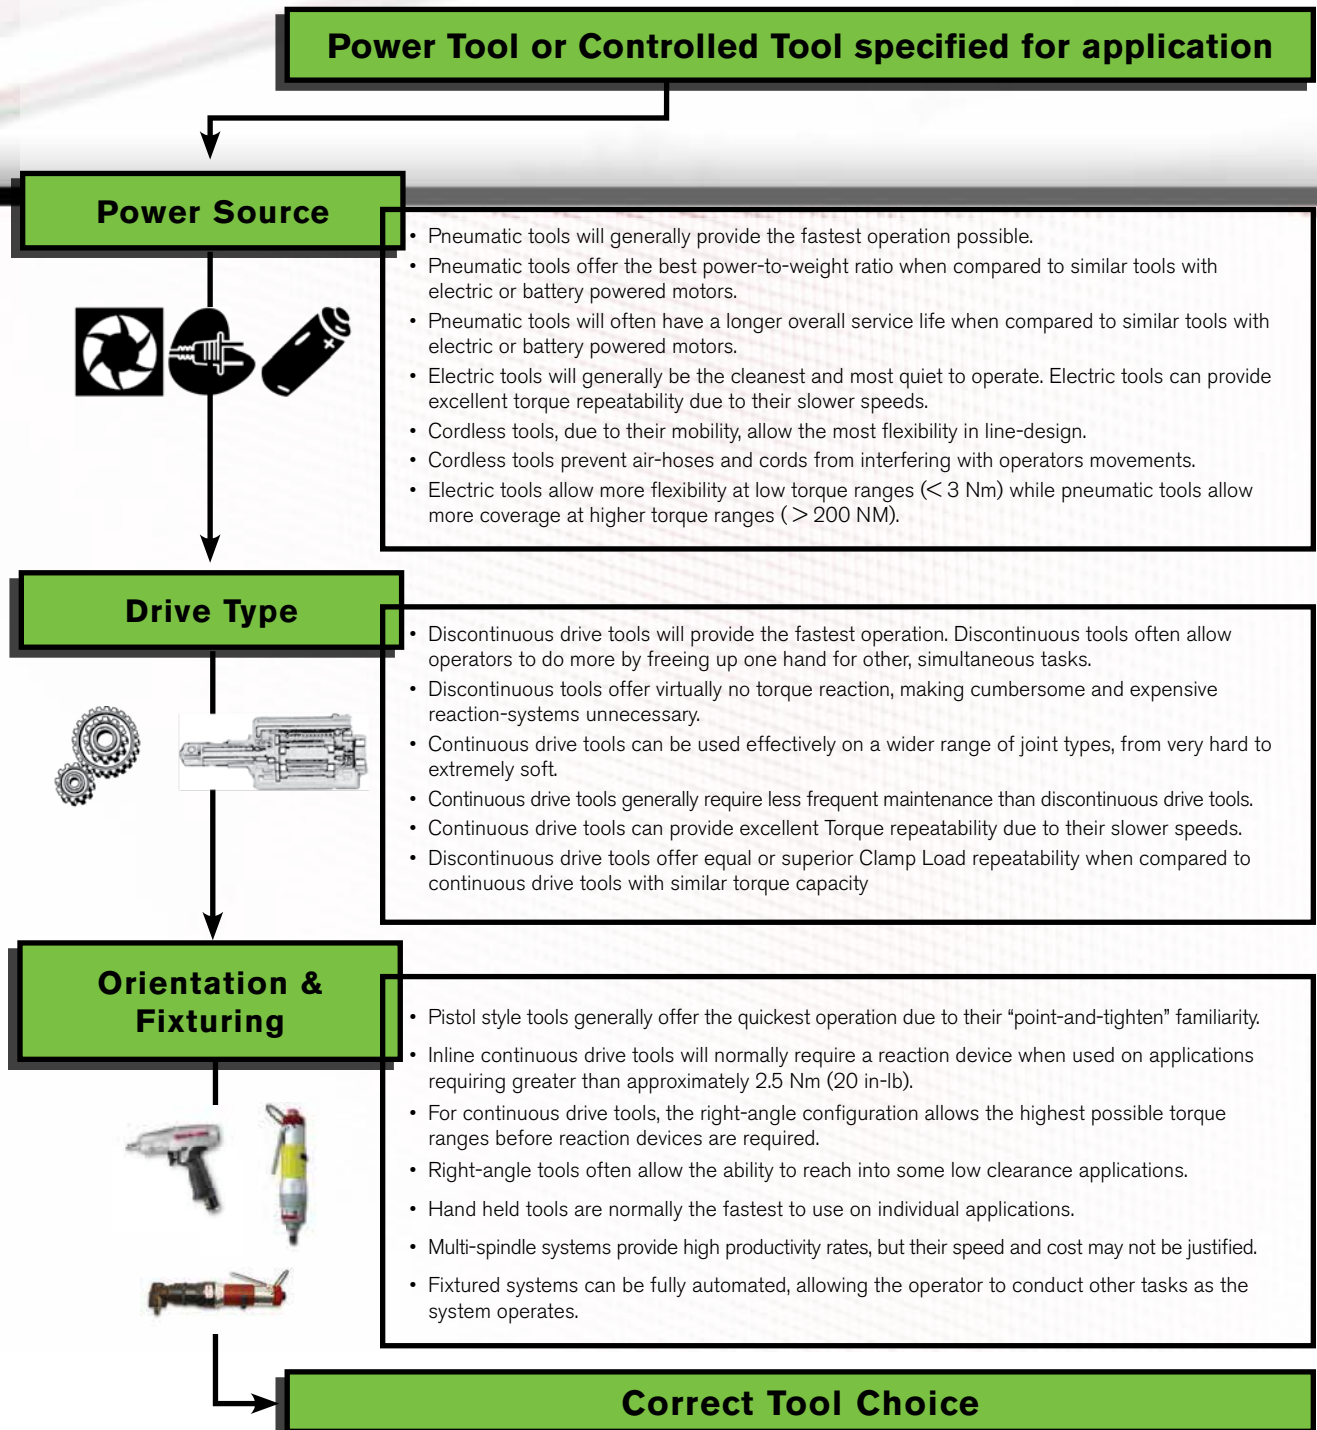

OVERVIEW

The speed and efficiency of the assembly process

AIMCO's commitment to you doesn't end with the purchase of our tools. Our goal is to educate you and your team on the most effective and efficient ways to utilize our tools; therefore, consistently producing a quality product.

One of the many benefits of purchasing AIMCO tools is the opportunity to attend our Tool-U training. AIMCO believes this is one of the greatest assets we can offer you. AIMCO has spent valuable time and dollars in setting up a

training program at our corporate headquarters in Portland, Oregon, that will enable your team to receive effective technical and practical training. Our training program is not performed in just one corner of our facility; virtually our entire facility is accessed for training individuals tailored to their specific needs and applications. This is essential for the continued success of our training.





The objective of the Tool-U program is to train your team from a technical aspect, learning how to effectively trouble shoot in order to reduce down time, as well as testing and proper use of the tool for maximum performance.

We do not depend on just one individual to train our customers; AIMCO utilizes a team of experts to share their knowledge with you. Our training programs have been designed to cover all elements influencing the fastening process. The first key to

success is understanding the mechanics of the fastened joint; AIMCO then explores the synergy between the joint, power tool, torque measurement and operator handling. The knowledge you gain from participating in the Tool University program can be applied to almost any assembly process regardless of the tool brand.

AIMCO is so committed to ensuring you receive proper training that this program is offered to our customers at no charge.





OVERVIEW

The speed and efficiency of the assembly process

AIMCO's Technical and Repair Service departments are one of the biggest value adds in the industry. We don't just work for you, we work with you. AIMCO's Repair and Technical Field Services provide support unmatched by our competitors. Our skilled technicians work closely with our Technical Services group, as well as our expert team of engineers, to share knowledge, keep up with new technologies, and improve processes.



GUARANTEED

The relationship between assembler and the assembly process

When AIMCO receives tools and equipment for servicing, they are pre-tested and inspected to identify issues and provide pertinent feedback to the user on getting the most out of their tool investment. We provide precise repair estimates giving the best value for your money. Repairs are completed using factory standards, parts, and processes. Once a repair is complete, it is tested, and/or calibrated, using N.I.S.T. certified measuring equipment, and guaranteed to perform to factory specifications.





CUSTOMER SERVICE

The total cost of tool maintenance and repair

To keep production lines running, tools must perform reliably. AIMCO helps manufacturers face the challenges of maintenance, repair, and lost labor time by offering products with superior workmanship and durability. By combining high quality products with a detailed and flexible service-training program, AIMCO ensures its tools will meet the expectations of reliability.



FOLLOW THROUGH

The ability of the tool to adhere to process requirements

The most important challenge faced by most companies is to meet its customer's demands for quality. AIMCO provides assembly tools that have been tested and proven to meet the most stringent engineering specifications. AIMCO backs those tools with its innovative Auditor torque measurement products. This allows manufacturers to focus on their most important goal – satisfied customers.



ACRADYNE GEN IV ACE CONTROLLER PLATFORM



AcraDyne's Gen IV ACE Controller platform is a single platform that commands all transducerized tools in the AIMCO portfolio

AIR | CORDLESS | ELECTRIC



The same, simple programming for all tool types, including:

AcraDyne

- DC Tools
- Cordless Battery Tools

Uryu


- Air Powered Tools
- Electric Tools
- Cordless Battery Tools

- No additional controller training needed for different platforms (tool type specific knowledge is required)
- One common communication for your global data collection, line controls, and fieldbus platforms



ACRADYNE GEN IV ACE CONTROLLER PLATFORM

The Gen IV ACE controller platform provides ultimate **FLEXIBILITY** and **FREEDOM** to command tools for every application
One common communication for your global data collection, line controls, and fieldbus platforms.

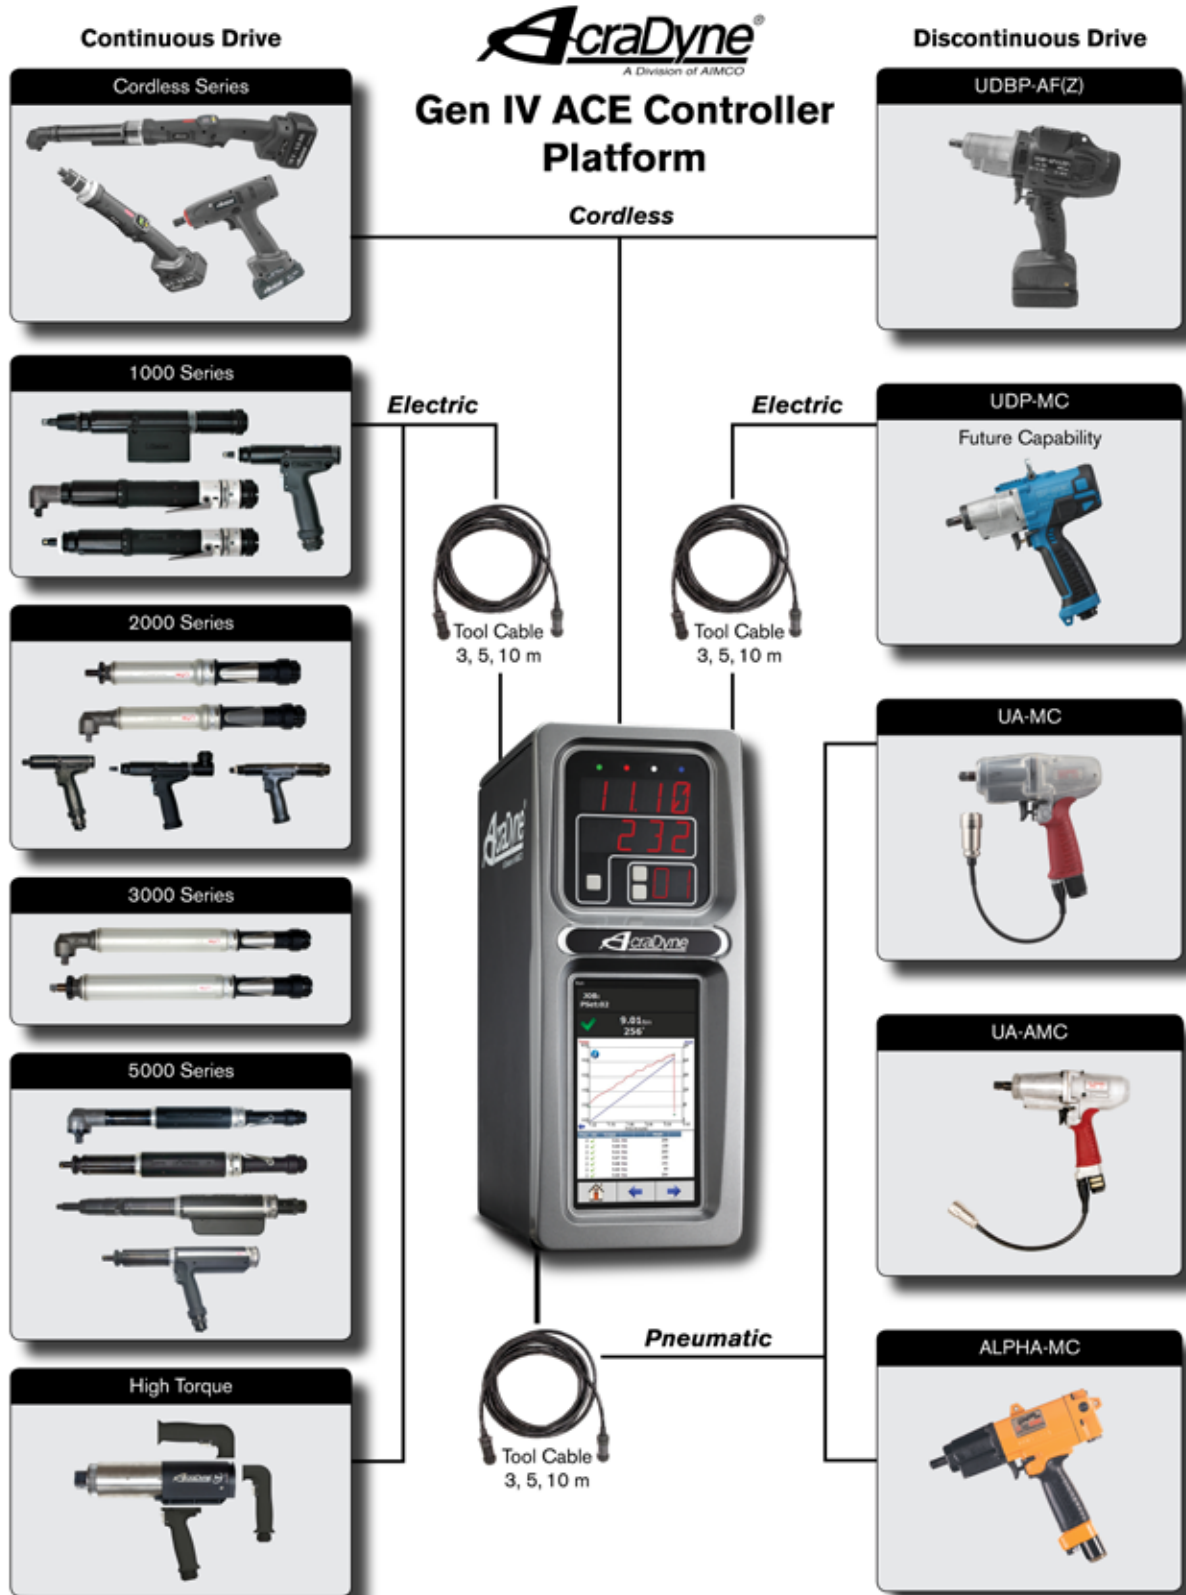

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

The AcraDyne Gen IV ACE controller platform is the culmination of more than 40 years of serving our industrial fastening customers with 15 years of designing and manufacturing DC tools that are Made in the USA. It is filled with countless advanced capabilities and features. The Gen IV ACE Controller is the core of the modular AcraDyne DC system. One controller will command any tool in the AcraDyne line from 0.5 Nm to 12,000 Nm, all with one cable.

Four Digit LED Torque Display:
Large numbers can be seen
from a distance.

Parameter Set Display:
Displays current
parameter set and
enables user to
quickly change by
scrolling up or down.

Secondary display allows
user to easily set and toggle
through information:

- Angle
- Engineering Units
- Bolt Count
- Job/Job Sequence

Optional 7" Touch-
Screen Display:

- Runs the same
software on PC
for ease of use
- Real-Time
Graphing
- Selectable Run
Screens




FEATURES AND BENEFITS

- Web browser based programming – Receive data on your PC, tablet, smartphone, or any other web-capable device. You can use more than one device at a time: Be in program mode on one device while reviewing real-time curves on another, while watching tool diagnostics on a third
- Multiple fastening strategies – Program up to 256 parameters with as many as 20 steps
- Jobs capability – 99. Event log – 5,000
- Backup & restore through USB or Ethernet
- Assignable I/O (8 X 8)
- Rundown storage – 1,000,000
- Real-time curve viewing. Curve storage – 20,000

NETWORKING CAPABILITIES

- Ethernet Protocols including Open Protocol, Ethernet/IP & PFCS
- Modular field bus connectivity: PROFIBUS, DeviceNET, Modbus TCP, or any fieldbus offered by 
- Data collection
- Serial protocols and string output
- Bar code scanning & printing
- Multi-spindle synchronization

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

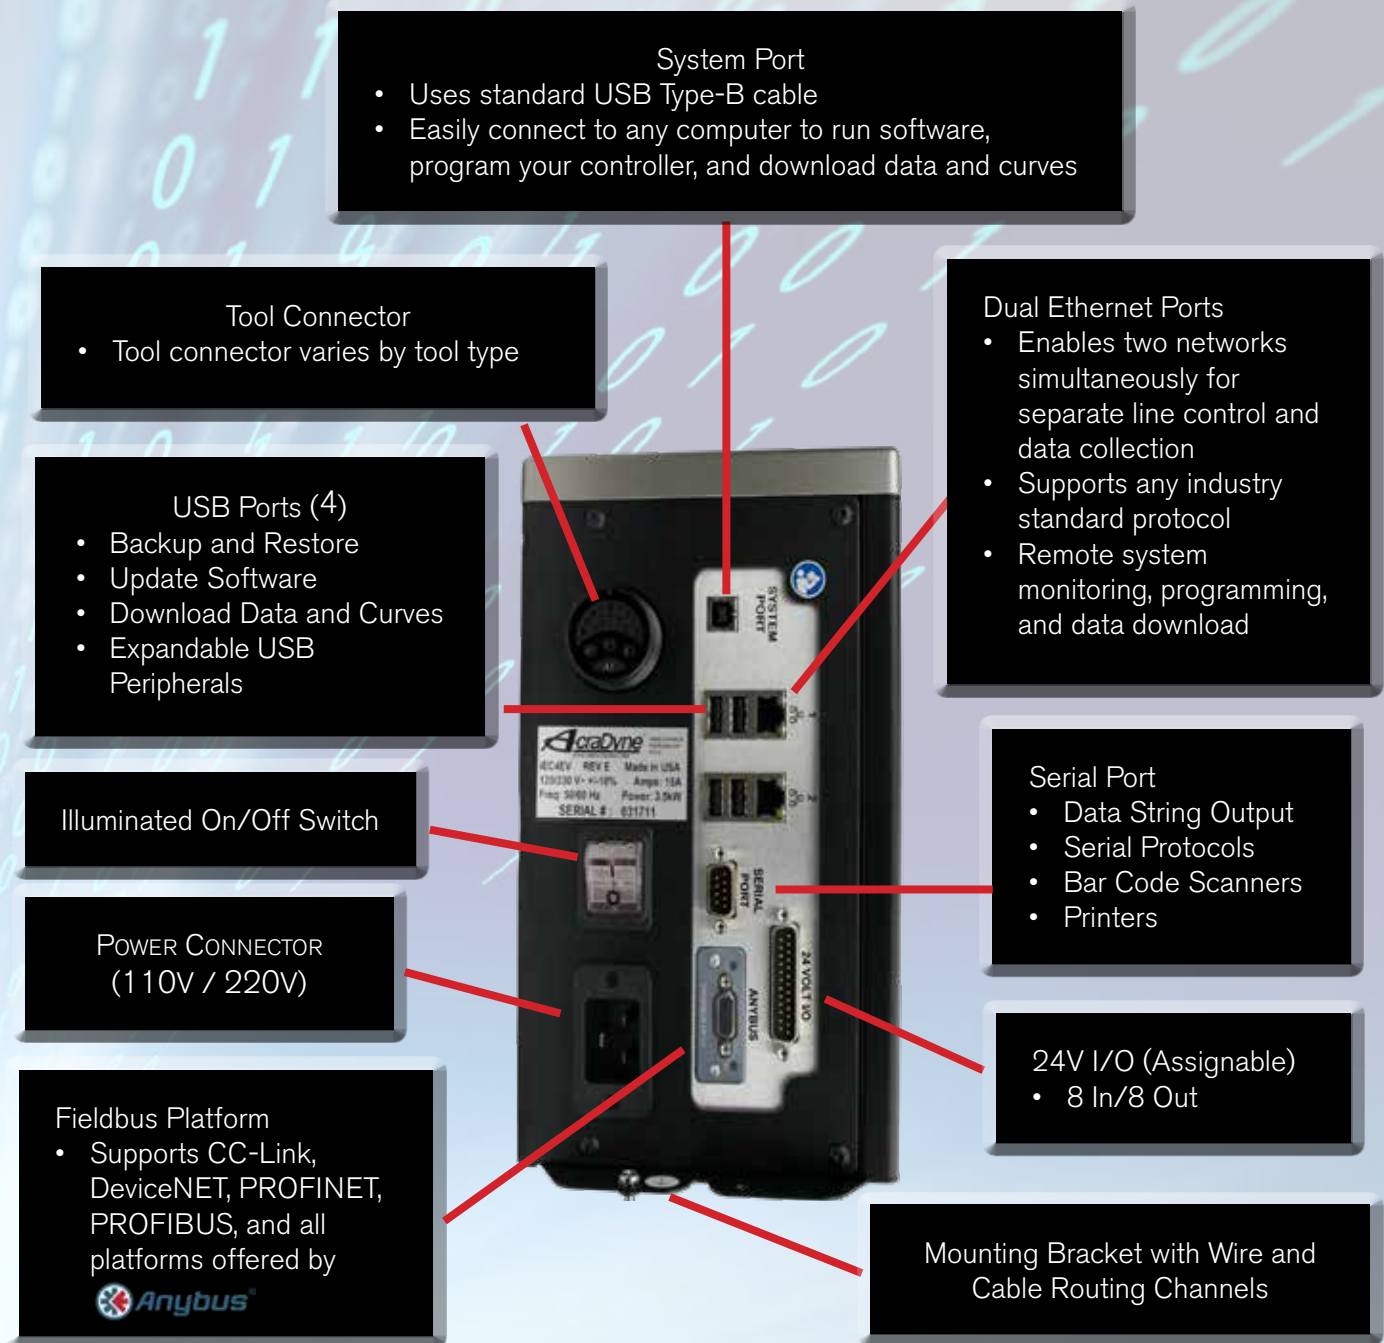

ACRADYNE GEN IV ACE CONTROLLER PLATFORM



AcraDyne iEC

GEN IV ACE iEC Controller for all AcraDyne DC Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
iEC4E	X	L/D		X	X	X
iEC4EV	X	L/D	X	X	X	X
iEC4EG	X	L/D/G		X	X	X
iEC4EGV	X	L/D/G	X	X	X	X

* Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

** Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.



AcraDyne iAC

GEN IV ACE iAC Controller for Transducerized Uryu Air Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	SOLENOID SHUT OFF ON BOARD	PROGRAMMABLE REGULATOR ON BOARD	ETHERNET** TWO PORTS
iAC4E	X	L/D		X	X			X
iAC4EV	X	L/D	X	X	X			X
iAC4EG	X	L/D/G		X	X			X
iAC4EGV	X	L/D/G	X	X	X			X
iAC4ES	X	L/D		X	X	X		X
iAC4ESV	X	L/D	X	X	X	X		X
iAC4ESG	X	L/D/G		X	X	X		X
iAC4ESGV	X	L/D/G	X	X	X	X		X
iAC4ESR	X	L/D		X	X	X	X	X
iAC4ESRV	X	L/D	X	X	X	X	X	X
iAC4ESRG	X	L/D/G		X	X	X	X	X
iAC4ESRGV	X	L/D/G	X	X	X	X	X	X

* Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

** Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.

ACRADYNE GEN IV ACE CONTROLLER PLATFORM



GEN IV ACE iBC Controller for all AcraDyne and Uryu Transducerized Battery Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
iBC4E	X	L/D		X	X	X
iBC4EV	X	L/D	X	X	X	X
iBC4EG	X	L/D/G		X	X	X
iBC4EGV	X	L/D/G	X	X	X	X

* For Zigbee option, add -Z to the end of the model number. For fieldbus options, add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other - options available upon request.

** Ethernet channel supports The Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.



GEN IV ACE iPC Controller for Uryu UDP Transducerized DC Pulse Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
iPC4E(1)(2)	X	L/D		X	X	X
iPC4EV(1)(2)	X	L/D	X	X	X	X
iPC4EG(1)(2)	X	L/D/G		X	X	X
iPC4EGV(1)(2)	X	L/D/G	X	X	X	X

* Select (1) for 110V or (2) for 220V operation.

Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.


** Ethernet channel supports The Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.

ACRADYNE GEN IV ACE CONTROLLER PLATFORM

NETWORK CONNECTIVITY



DIMENSIONS

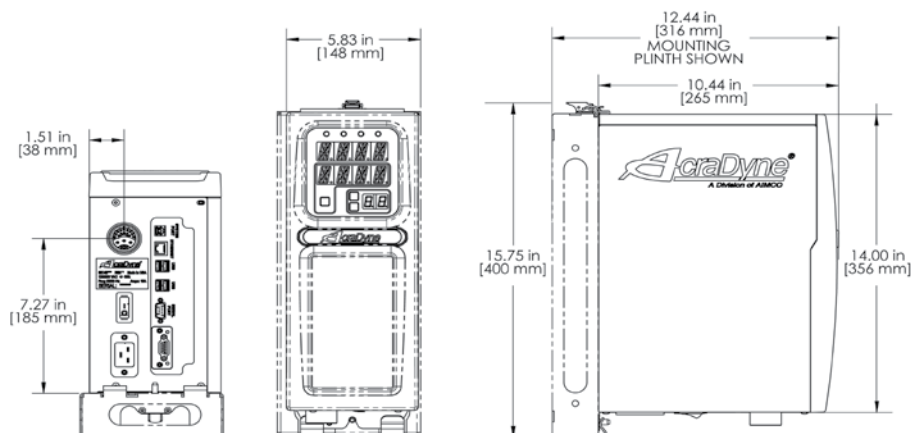


WIDTH	HEIGHT	DEPTH	WEIGHT
5.83 in / 148 mm	15.75 in / 400 mm	12.44 in / 316 mm	15.65 lb / 7.1 kg

ACRADYNE CONTROLLER SOFTWARE

SOFTWARE

AcraDyne's software package is on-board every AcraDyne controller and is provided FREE of charge. This comprehensive, user-friendly program allows programming, analysis, and diagnostics.

The software is based on a standard web browser, allowing you to connect the AcraDyne controller with any computer, tablet, or smart device. Connect through Ethernet, USB, or wirelessly via a network connected to both devices.

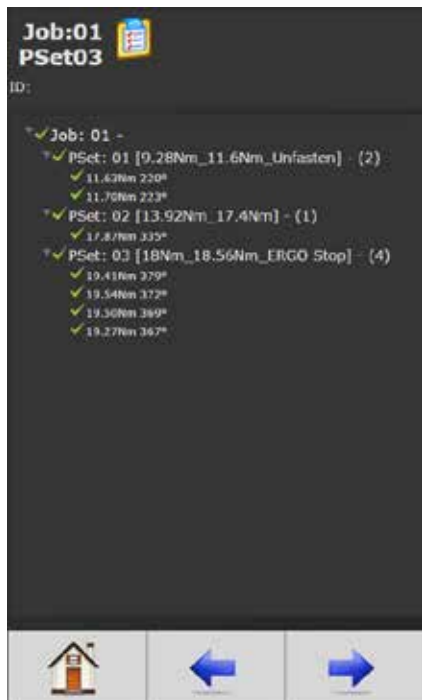

Adding and editing Parameter Sets (256) and Jobs (99) is easy and intuitive in the parameter set up function.



View curve results in real time or view stored results. As many as 20,000 curve results can be stored in memory.



Tool programming and diagnostics for repair, calibration and advanced troubleshooting.



Choose from several run screens that display easy to view, large screen indicators.

ACRADYNE 1000 SERIES NUTRUNNERS

FEATURES AND BENEFITS

Superior size, speed, and duty cycle



Angle



In-line



Push-to-Start



Fixtured
Rear Exit
Cable



Fixtured
Bottom Exit
Cable



APPLICATION DATA

1000 SERIES	NM	MAX TORQUE FT-LB	NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	OUTPUT DRIVE
ANGLE*									
AEN4C12004B	4	3	1 - 4	0.7 - 3	3,111	2.0	0.91	0.91	3/8 sq. dr.
AEN4C12009B	9	6.6	2.3 - 9	1.7 - 6.6	1,750	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12014B	14	10	3.5 - 14	2.6 - 10	875	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12018B	18	13	4.5 - 18	3.3 - 13	691	2.2	1.00	1.00	3/8 sq. dr.
AEN4C12022B	22	16	5.5 - 22	4.1 - 16	560	2.2	1.00	1.00	3/8 sq. dr.
IN-LINE**									
AES4A12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	0.91	3/8 sq. dr.
AES4A12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	0.91	3/8 sq. dr.
AES4A12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AES4A12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AES4A12018BV	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AES4A12022BV	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.
PUSH-TO-START									
AEL4A12003B(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	0.91	3/8 sq. dr.
AEL4A12006B(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	0.91	3/8 sq. dr.
AEL4A12011B(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12014B(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12018B	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AEL4A12022B	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.
FIXTURED***									
AEF4(A)(C)(X)12003B(B)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.0	0.91	0.91	3/8 sq. dr.
AEF4(A)(C)(X)12006B(B)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.0	0.91	0.91	3/8 sq. dr.
AEF4(A)(C)(X)12011B(B)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12014B(B)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12018B(B)	18	13	4.5 - 18	3.3 - 13	840	2.2	1.00	1.00	3/8 sq. dr.
AEF4(A)(C)(X)12022B(B)	22	16	5.5 - 22	4.1 - 16	656	2.2	1.00	1.00	3/8 sq. dr.

* Add "F" to part numbers for flush socket.


** "V" indicates extended Ergo-Drive output  Replace "V" with "Q" for 1/4" quick change output.

*** Add "A" to part numbers for 1/2" sliding spindle models. Add "C" to part numbers for 1-3/4" sliding spindle models. Add "X" to part numbers for fixed 3/8" square drive output models.

*** Add "B" to part numbers for bottom exit cable.


*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE 1000 SERIES NUTRUNNERS

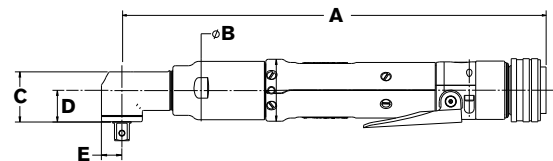


DIMENSIONS

ANGLE	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AEN4C12004B	11.65	295.9	1.47	37.3	.98	24.8	.62	15.8	.40	10.2					
AEN4C12009B	11.00	279.5	1.47	37.3	1.29	32.8	.82	20.9	.52	13.1					
AEN4C12014B	11.66	296.4	1.47	37.3	1.29	32.8	.82	20.9	.52	13.1					
AEN4C12018B	11.66	296.4	1.47	37.3	1.29	32.8	.82	20.9	.52	13.1					
AEN4C12022B	11.66	296.4	1.47	37.3	1.29	32.8	.82	20.9	.52	13.1					

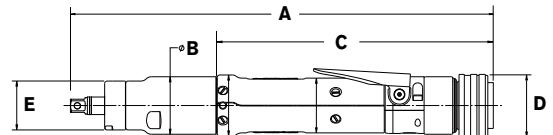

DIMENSIONS

INLINE	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AES4A12003B	11.12	282.7	1.47	37.3	7.38	187.5	1.59	40.4	1.25	31.8					
AES4A12006B	11.12	282.7	1.47	37.3	7.38	187.5	1.59	40.4	1.25	31.8					
AES4A12011B	11.44	290.5	1.47	37.3	7.38	187.5	1.59	40.4	1.25	31.8					
AES4A12014B	11.44	290.5	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AES4A12018B	11.44	290.5	1.47	37.3	7.38	187.5	1.59	40.4	1.25	31.8					
AES4A12022B	11.44	290.5	1.47	37.3	7.38	187.5	1.59	40.4	1.25	31.8					
PUSH-TO-START	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AEL4A12003B	11.31	287.3	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AEL4A12006B	11.32	287.4	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AEL4A12011B	11.62	295.4	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AEL4A12014B	11.62	295.4	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AEL4A12018B	11.62	295.4	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					
AEL4A12022B	11.62	295.4	1.56	39.6	7.38	187.5	1.59	40.4	1.25	31.8					

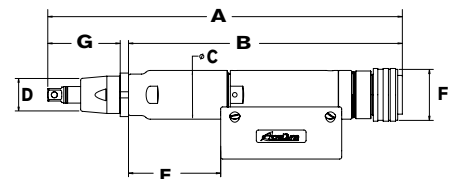

DIMENSIONS

FIXTURED	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM	IN	(F)	MM	IN	(G)	MM
AEF4A12003B	11.53	292.9	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	2.18	55.5							
AEF4A12006B	11.53	292.9	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	2.18	55.5							
AEF4A12011B	12.20	309.8	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	2.18	55.5							
AEF4A12014B	12.20	309.8	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	2.18	55.5							
AEF4A12018B	12.20	309.8	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	2.18	55.5							
AEF4A12022B	12.20	309.8	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	2.18	55.5							
AEF4C12003B	15.32	389.2	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	5.98	151.8							
AEF4C12006B	15.32	389.2	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	5.98	151.8							
AEF4C12011B	15.99	406.1	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	5.98	151.8							
AEF4C12014B	15.99	406.1	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	5.98	151.8							
AEF4C12018B	15.99	406.1	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	5.98	151.8							
AEF4C12022B	15.99	406.1	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	5.98	151.8							
AEF4X12003B	9.35	237.5	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	.80	20.4							
AEF4X12006B	9.35	237.5	9.10	231.04	1.47	37.3	1.13	28.57	2.06	52.2	1.59	40.4	.80	20.4							
AEF4X12011B	10.00	254.4	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	.80	20.4							
AEF4X12014B	10.00	254.4	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	.80	20.4							
AEF4X12018B	10.00	254.4	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	.80	20.4							
AEF4X12022B	10.00	254.4	9.10	231.04	1.47	37.3	1.13	28.57	2.72	69.1	1.59	40.4	.80	20.4							

ACRADYNE PISTOL GRIP NUTRUNNERS

FEATURES AND BENEFITS

- 1000 & 2000 series tools available with bottom exit, rear exit, or top exit cable configurations. 5000 series tools available in bottom exit or top exit models
- AcraDyne's multi-function button (MFB) provides increased flexibility
- On-board lights and audible signal for operator feedback
- Push-To-Start models also available

1000 & 2000 Series



5000 Series



APPLICATION DATA

	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
1000 SERIES*																
AEP4(A)(R)(T)12003B(V)(Q)	3	2.2	0.8 - 3	0.6 - 2.2	2,625	2.2	1.00	3/8"	7.34	178.8	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12006B(V)(Q)	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8"	7.34	178.8	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12011B(V)(Q)	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12014B(V)(Q)	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12018BV	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
AEP4(A)(R)(T)12022BV	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8	8.00	203.3	0.54	13.7	6.01	152.6	1.96	49.7
2000 SERIES*																
AEP4(A)(R)(T)22020BV	20	14	5 - 20	3.7 - 14	1,313	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22025BV	25	18	6.3 - 25	4.6 - 18	1,037	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22030BV	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22035BV	35	25	8.8- 35	6.5 - 25	747	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7
AEP4(A)(R)(T)22040BV	40	29	10 - 40	7.4 - 29	656	2.4	1.09	3/8	8.66	219.9	0.56	14.2	6.87	174.4	1.96	49.7


* "V" indicates extended Ergo-Drive output. **E** Replace "V" with "Q" for 1/4" quick change output only as noted in the table.

Add "A" to part numbers for bottom exit cable models. Add "R" to part numbers for rear exit cable models. Add "T" to part numbers for top exit cable models


	MAX TORQUE		TORQUE RANGE		FREE SPEED RPM	WEIGHT (-) SOCKET		OUTPUT SQ DR	(A)		(B)		(C)		(D)	
	NM	FT-LB	NM	FT-LB		LB	KG		IN	MM	IN	MM	IN	MM	IN	MM
	5000 SERIES															
AEP35075AV(T)	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35090AV(T)	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35110AV(T)	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35135AV(T)	135	99	34 - 135	25 - 99	515	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35170AV(T)	170	125	43 - 170	32 - 125	418	9.2	4.17	1/2	15.95	405.2	.68	17.4	7.37	187.1	1.96	49.7
AEP35280A(T)	280	206	70 - 280	52 - 207	236	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35350A(T)	350	258	88 - 350	65 - 258	192	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35420A(T)	420	310	105 - 420	78 - 310	159	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35515A(T)	515	380	128 - 515	95 - 380	129	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7
AEP35635A(T)	635	468	159 - 635	117 - 469	104	13.6	6.17	3/4	18.43	468.2	1.11	28.1	7.37	187.1	1.96	49.7

"V" indicates extended Ergo-Drive output. **E**
Add "T" to part numbers for top exit cable models

**1000 Series
2000 Series**



5000 Series

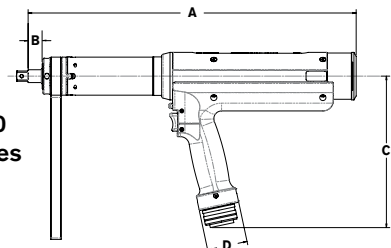

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE ANGLE NUTRUNNERS

FEATURES AND BENEFITS

AcraDyne angle nutrunners provide the perfect solution to space-limited fastening applications. A compact, durable head houses a precision right-angle gear set which fits into the tightest spaces and delivers a highly accurate fastening cycle. Lightweight materials and a uniform body diameter provide a comfortable grip. The ergonomically placed start lever ensures simple control.



AEN32015C



AEN32025CDL



AEN33060C



AEN33200CF



AEN35140B



AEN35285B


APPLICATION DATA

MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT	(A)		(B)		(C)		(D)		(E)		
NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ. DR	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	
2000 SERIES																		
AEN32015C(DL)	15	11	3 - 15	2.2 - 11	1,481	2.7	1.22	3/8	14.61	371	1.85	47	1.37	34.8	.90	22.9	.52	13.1
AEN32025C(DL)	25	18	5 - 20	3.7 - 15	833	2.7	1.22	3/8	14.61	371	1.85	47	1.37	34.8	.90	22.9	.52	13.1
AEN32030C(F)(DL)	30	22	6 - 30	4.4 - 22	803	2.8	1.27	3/8	14.42	366.2	1.85	47	1.65	41.8	1.16	29.4	.70	17.8
AEN32040C(F)(DL)	40	30	8 - 40	5.9 - 29	574	2.8	1.27	3/8	14.42	366.2	1.85	47	1.65	41.8	1.16	29.4	.70	17.8
3000 SERIES																		
AEN33042C(F)	42	31	9.5 - 42	7 - 31	1,095	4.4	2.00	3/8	16.63	422.33	1.85	47	1.66	42.11	1.17	29.67	.7	17.78
AEN33053C(F)	53	39	12 - 53	8 - 39	865	4.4	2.00	3/8	16.63	422.33	1.85	47	1.66	42.11	1.17	29.67	.7	17.78
AEN33060C(F)(DL)	60	44	12 - 60	9 - 44	845	6.6	2.99	1/2.	18.92	480.53	1.85	47	1.90	48.36	1.37	34.90	.83	20.96
AEN33090C(F)(DL)	90	66	18 - 90	13 - 66	568	6.6	2.99	1/2.	18.92	480.53	1.85	47	1.90	48.36	1.37	34.90	.83	20.96
AEN33120C(F)(DL)	120	89	24 - 120	18 - 88	442	9.3	4.22	1/2	21.00	533.46	1.85	47	2.78	70.59	2.08	52.81	1.05	26.67
AEN33200C(F)(DL)	200	148	40 - 200	29 - 147	245	9.4	4.26	3/4	23.21	589.64	1.85	47	2.59	65.75	1.89	47.98	1.05	26.67
AEN33210C(F)(DL)	210	95	50 - 210	37 - 155	234	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
AEN33300C(F)(DL)	300	221	60 - 300	42 - 221	151	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
AEN33375C(F)(DL)	375	277	75 - 375	55 - 276	151	10.0	4.54	3/4	23.58	598.88	1.85	47	2.90	73.53	1.97	50.04	1.25	31.75
5000 SERIES																		
AEN35090B(F)	90	66	23 - 90	17 - 66	607	6.9	3.13	1/2	22.59	573.7	2.31	58.7	1.90	48.4	1.37	34.9	.81	20.6
AEN35140B(F)	140	103	35 - 140	26 - 103	472	10.4	4.72	3/4	22.52	571.9	2.31	58.7	2.59	65.8	1.89	48	1.05	26.7
AEN35175B(F)	175	129	44 - 175	33 - 129	384	10.5	4.76	3/4	22.52	571.9	2.31	58.7	2.59	65.8	1.89	48	1.05	26.7
AEN35225B(F)	225	166	56 - 225	41 - 166	291	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8
AEN35285B(F)	285	210	71 - 285	52 - 210	236	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8
AEN35350B(F)	350	258	88 - 350	65 - 258	191	12.3	5.58	3/4	22.88	581.1	2.31	58.7	2.90	73.5	1.97	50	1.25	31.8


* Add "F" to part numbers for flush socket only as noted in the table.

Add "DL" to part numbers for dual levers only as noted in the table.

2000 & 3000 Series

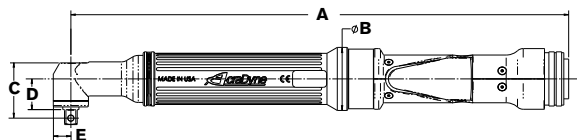

5000 Series

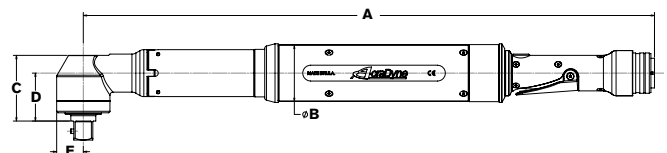

ACRADYNE INLINE NUTRUNNERS

FEATURES AND BENEFITS

Due to their compact size and durability, AcraDyne inline nutrunners are the ideal choice for fixtured fastening applications. A uniform body diameter and a hex shaped mounting point allow for simple installation into fixtured plates. A reaction bar for use in handheld applications is also included with all AcraDyne inline nutrunners.



APPLICATION DATA

	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT SQ. DR	(A)		(B)		(C)		(D)		(E)	
	NM	FT-LB	NM	FT-LB		RPM	LB		KG	IN	IN	MM	IN	MM	IN	MM	IN	MM
2000 SERIES*																		
AES32010C(V)(Q)	10	7.4	2 - 10	1.5 - 7.4	2,222	2.5	1.13	3/8*	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.59	40.4
AES32020C(V)(Q)	20	15	4 - 20	3.0 - 15	1,250	2.5	1.13	3/8*	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.59	40.4
AES32025C(V)(Q)	25	18	5 - 25	3.7 - 18	893	3.2	1.45	3/8*	13.85	351.7	1.59	40.4	1.85	47	.56	14.3	1.59	40.4
AES32038C(V)	38	28	7.5 - 38	5.5 - 28	595	4.2	1.91	3/8.	16.69	424	1.50	38.1	1.85	47	.51	12.9	1.59	40.4
3000 SERIES*																		
AES33040C(V)(-2)	40	30	8 - 40	5.9 - 30	1,314	6.4	2.90	1/2	18.24	463.38	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33060C(V)(-2)	60	44	12 - 60	8.9 - 44	883	6.4	2.90	1/2	18.24	463.38	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33100C(V)(-2)	100	74	20 - 100	15 - 74	489	8.1	3.67	1/2	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33150CV	150	111	30 - 150	22 - 111	329	8.1	3.67	1/2.	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33150C-2	150	111	30 - 150	22 - 111	329	8.1	3.67	3/4	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33230CV	185	137	46 - 185	34 - 137	221	8.1	3.67	1/2	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33230C-2	230	170	46 - 230	34 - 170	221	8.1	3.67	3/4	22.56	572.99	1.94	49.28	1.85	47	.68	17.17	1.59	40.4
AES33400C	400	295	80 - 400	59 - 295	122	13.0**	5.90**	3/4.	24.90	632.46	1.94	49.28	1.85	47	1.11	28.08	1.59	40.4
AES33600C	600	443	120 - 600	89 - 443	82	13.0**	5.90**	3/4	24.90	632.46	1.94	49.28	1.85	47	1.11	28.08	1.59	40.4
5000 SERIES																		
AES35075AV	75	55	19 - 75	14 - 55	944	9.2	4.17	1/2	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.59	40.4
AES35090AV	90	66	23 - 90	17 - 66	767	9.2	4.17	1/2	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.59	40.4
AES35110AV	110	81	28 - 110	21 - 81	634	9.2	4.17	1/2.	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.59	40.4
AES35135AV	135	100	34 - 135	25 - 100	515	9.2	4.17	1/2.	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.59	40.4
AES35170AV	170	126	43 - 170	32 - 126	418	9.2	4.17	1/2	21.86	555.2	1.85	47	2.31	58.7	.68	17.4	1.59	40.4
AES35280A	280	207	70 - 280	52 - 207	236	12.8	5.81	3/4	24.34	618.2	1.85	47	2.31	58.7	1.19	30.1	1.59	40.4
AES35350A	350	258	88 - 350	65 - 258	192	12.8	5.81	3/4	24.34	618.2	1.85	47	2.31	58.7	1.19	30.1	1.59	40.4
AES35420A	420	310	105 - 420	78 - 310	159	12.8	5.81	3/4	24.34	618.2	1.85	47	2.31	58.7	1.19	30.1	1.59	40.4
AES35515A	515	380	128 - 515	95 - 380	129	12.8	5.81	3/4.	24.34	618.2	1.85	47	2.31	58.7	1.19	30.1	1.59	40.4
AES35635A	635	469	159 - 635	117 - 469	104	12.8	5.81	3/4	24.34	618.2	1.85	47	2.31	58.7	1.19	30.1	1.59	40.4


* 2000 series tools are available in "V" for Ergo-Drive and Q for 1/4" quick-change models only as noted in the table.

3000 series tools are available in "V" for Ergo-Drive and "-2" models for 2" sliding spindle only as noted in the table.


5000 series tools: "V" indicates extended Ergo-Drive output.

** Includes reaction bar and fixture nut

2000 & 3000 Series



5000 Series



* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE FIXTURED NUTRUNNERS



AEF35135AV
Standard Spindle, Rear Exit Cable



AEF35135AVB
Standard Spindle, Bottom Exit Cable



AEF35350A
Standard Spindle, Rear Exit Cable



AEF35135A-2
2" Sliding Spindle, Rear Exit Cable



AEF35135AB-2
2" Sliding Spindle, Bottom Exit Cable




APPLICATION DATA

5000 SERIES*	NM	MAX TORQUE FT-LB	NM	TORQUE RANGE FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	OUTPUT DRIVE
AEF35075A(V)(VB)(-2)(B-2)	75	55	19 - 75	14 - 55	944	9.6		4.35	1/2 SQ. DR.
AEF35090A(V)(VB)(-2)(B-2)	90	66	23 - 90	17 - 66	767	9.6		4.35	1/2 SQ. DR.
AEF35110A(V)(VB)(-2)(B-2)	110	81	28 - 110	21 - 81	634	9.6		4.35	1/2 SQ. DR.
AEF35135A(V)(VB)(-2)(B-2)	135	100	34 - 135	25 - 100	515	9.6		4.35	1/2 SQ. DR.
AEF35170A(V)(VB)	170	125	43 - 170	32 - 125	418	9.6		4.35	1/2 SQ. DR.
AEF35170A(-2)(B-2)	170	125	43 - 170	32 - 125	418	9.6		4.35	3/4 SQ. DR.
AEF35280A(B)**	280	207	70 - 280	52 - 207	236	13.6		6.17	3/4 SQ. DR.
AEF35350A(B)**	350	258	88 - 350	65 - 258	192	13.6		6.17	3/4 SQ. DR.
AEF35420A(B)**	420	310	105 - 420	77 - 310	159	13.6		6.17	3/4 SQ. DR.
AEF35515A(B)**	515	380	128 - 515	95 - 380	129	13.6		6.17	3/4 SQ. DR.
AEF35635A(B)**	635	469	159 - 635	117 - 469	104	13.6		6.17	3/4 SQ. DR.

* "V" = standard spindle with rear exit cable. "VB" = standard spindle with bottom exit cable. "B" = bottom exit cable

"-2" = 2" sliding spindle with rear exit cable. "B-2" = 2" sliding spindle with bottom exit cable.

** Item 28843 is a panel mount 2" sliding spindle for 280 - 635 Nm models.

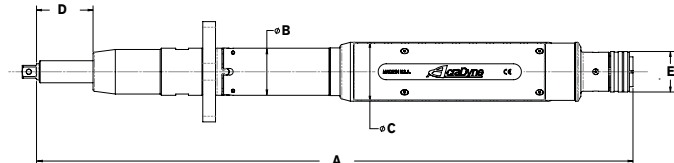

DIMENSIONS

5000 SERIES	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM
AEF35075AV	18		457.2	1.85		47	2.31		58.7	.72		18.4	1.59		40.4
AEF35090AV	18		457.2	1.85		47	2.31		58.7	.72		18.4	1.59		40.4
AEF35110AV	18		457.2	1.85		47	2.31		58.7	.72		18.4	1.59		40.4
AEF35135AV	18		457.2	1.85		47	2.31		58.7	.72		18.4	1.59		40.4
AEF35170AV	18		457.2	1.85		47	2.31		58.7	.72		18.4	1.59		40.4
AEF35075A-2	23.48		596.3	1.85		47	2.31		58.7	2.23		56.6	1.59		40.4
AEF35090A-2	23.48		596.3	1.85		47	2.31		58.7	2.23		56.6	1.59		40.4
AEF35110A-2	23.48		596.3	1.85		47	2.31		58.7	2.23		56.6	1.59		40.4
AEF35135A-2	23.48		596.3	1.85		47	2.31		58.7	2.23		56.6	1.59		40.4
AEF35170A-2	23.48		596.3	1.85		47	2.31		58.7	2.23		56.6	1.59		40.4
AEF35280A	20.4		518.1	1.85		47	2.31		58.7	1.86		47.1	1.59		40.4
AEF35350A	20.4		518.1	1.85		47	2.31		58.7	1.86		47.1	1.59		40.4
AEF35420A	20.4		518.1	1.85		47	2.31		58.7	1.86		47.1	1.59		40.4
AEF35515A	20.4		518.1	1.85		47	2.31		58.7	1.86		47.1	1.59		40.4
AEF35635A	20.4		518.1	1.85		47	2.31		58.7	1.86		47.1	1.59		40.4


*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRADYNE TUBENUT NUTRUNNERS AND SPECIALTY GEARHEADS

FEATURES AND BENEFITS

- Patented safety algorithm
- Transducer senses resistance in the initial 90 degrees of rotation and returns to open upon any resistance encountered
- Durable tubenut head design
- Simple, one-touch back to open operation for maximum productivity

WITH INNOVATIVE SAFETY SENSOR TECHNOLOGY!

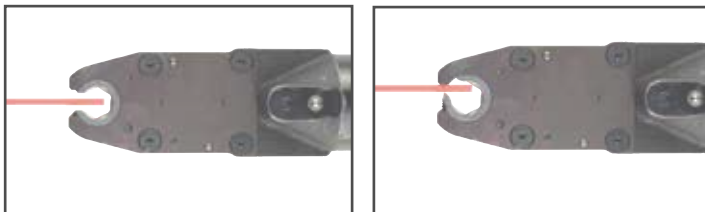

AET 2000 Series Model



AET 1000 Series Model



AET 2000 Series Model with Double Levers

APPLICATION DATA

1000 SERIES*	NM	MAX TORQUE	FT-LB	NM	TORQUE RANGE	FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	IN	OUTPUT DRIVE	NM
AET4AA12018B	14		13	3.6 - 14		2.7 - 11	516	3.1		1.41	1/4 - 7/16		7 - 12
AET4AB12025B	20		18	5 - 20		3.7 - 15	387	3.1		1.41	3/8 - 5/8		10 - 17
AET4A12025B-KD	25		18	5 - 25		3.7 - 18	387	3.1		1.41	3/8 - 5/8		10 - 17
2000 SERIES*	NM	MAX TORQUE	FT-LB	NM	TORQUE RANGE	FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	IN	OUTPUT DRIVE	NM
AET32020C(DL)	20		15	4 - 16		3.0 - 12	622	3.1		1.41	1/4 - 7/16		7 - 12
AET32025C(DL)	25		18	5 - 20		3.7 - 15	466	4.0		1.81	3/8 - 5/8		10 - 17
AET32035C(DL)	35		26	7 - 28		5.2 - 21	347	4.5		2.04	1/2 - 7/8		13 - 24
AET32050C(DL)	50		37	10 - 40		7.4 - 30	257	5.6		2.54	5/8 - 1-3/16		17 - 32

* Add "DL" to part numbers for double levers. Request specific socket size when placing your order. AIMCO offers a wide variety of socket sizes to fit your needs. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

SPECIALTY GEARHEADS

AIMCO can provide specialized heads for most any application. Tubenut, Hold and Drive, Crow Foot, Offsets, and Sliding Spindles are just a few of the head styles available. Whatever the requirements, AIMCO will recommend the head configuration that will get the job done successfully.



ACRADYNE HOLD & DRIVE NUTRUNNERS

FEATURES AND BENEFITS


- Torques ranging from 20 Nm – 200 Nm
- Very robust design
- 1" and 2" travels are standard
- Sockets and holders are custom



APPLICATION DATA

MODEL*	NM	MAX TORQUE	FT-LB	NM	TORQUE RANGE	FT-LB	FREE SPEED RPM	WEIGHT LB	MIN/MAX SOCKET
AEH4F12020B-(1,2)	20		15	4 - 20		3 - 15	533	-1 = 2.8 -2 = 3.0	9/16 (14 MM) / 13/16, (21 MM)
AEH4F12026B-(1,2)	26		19	5 - 26		4 - 19	432	-1 = 2.8 -2 = 3.1	9/16 (14 MM) / 13/16, (21 MM)
AEH32025C-(1,2)	25		18	5 - 25		4 - 18	833	-1 = 3.5 -2 = 3.5	9/16 (14 MM) / 13/16, (21 MM)
AEH32030C-(1,2)	30		22	6 - 30		4 - 22	803	-1 = 3.5 -2 = 3.6	9/16 (14 MM) / 13/16, (21 MM)
AEH32040C-(1,2)	40		30	8 - 40		6 - 30	574	-1 = 3.5 -2 = 3.7	9/16 (14 MM) / 13/16, (21 MM)
AEH33042C-(1,2)	42		31	10 - 42		7 - 31	1,095	-1 = 5.6 -2 = 5.8	9/16 (14 MM) / 13/16, (21 MM)
AEH33053C-(1,2)	53		39.	12 - 53		8 - 39	865	-1 = 5.6 -2 = 5.8	9/16 (14 MM) / 13/16, (21 MM)
AEH33060C-(1,2)	60		44	12 - 60		9 - 44	845	-1 = 7.3 -2 = 7.5	9/16 (14 MM) / 1-1/4, (32 MM)
AEH33090C-(1,2)	90		66	18 - 90		13 - 66	568	-1 = 7.3 -2 = 7.6	9/16 (14 MM) / 1-1/4, (32 MM)
AEH33120C-(1,2)	120		89	24 - 120		18 - 89	442	-1 = 10.0 -2 = 10.3	5/8 (15 MM) / 1-1/4, (32 MM)
AEH33200C-(1,2)	200		148	40 - 200		29 - 148	245	-1 = 10.0 -2 = 10.4	5/8 (16 MM) / 1-1/4, (32 MM)
AEH35090B-(1,2)	90		66	23 - 90		17 - 66	607	-1 = 7.6 -2 = 7.9	9/16 (14 MM) / 1-1/4, (32 MM)
AEH35140B-(1,2)	140		103	35 - 140		26 - 103	472	-1 = 10.6 -2 = 11.0	5/8 (15 MM) / 1-1/4, (32 MM)
AEH35175B-(1,2)	175		129	44 - 175		33 - 129	384	-1 = 10.6 -2 = 11.1	5/8 (15 MM) / 1-1/4, (32 MM)
AEH35225B-(1,2)	225		166	56 - 225		41 - 166	291	-1 = 12.9 -2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)
AEH35285B-(1,2)	285		210	71 - 285		52 - 210	236	-1 = 12.9 -2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)
AEH35350B-(1,2)	350		258	88 - 350		65 - 258	191	-1 = 12.9 -2 = 13.3	3/4 (19MM) / 1-1/4, (32 MM)

* Add "1" to part numbers for 1" travel. Add "2" to part numbers for 2" travel.

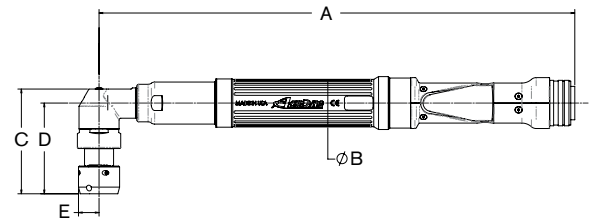


DIMENSIONS

MODEL	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)*	MM	IN	(E)	MM
AEH4F12020B-1	14.59		370.7	1.59		40.4	3.72		94.4	3.17		80.6	.76		19.3
AEH4F12026B-1	14.59		370.7	1.59		40.4	3.72		94.4	3.17		80.6	.76		9.3
AEH32025C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH32030C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH32040C-1	14.59		370.7	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33042C-1	16.79		426.5	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33053C-1	16.79		426.5	1.85		47	3.72		94.4	3.17		80.6	.76		19.3
AEH33060C-1	18.92		480.5	1.96		49.8	4.04		102.5	3.37		85.66	.94		23.9
AEH33090C-1	18.92		480.5	1.96		49.8	4.04		102.5	3.37		85.66	.94		23.9
AEH33120C-1	21.00		533.5	1.96		49.8	4.87		123.7	4.09		103.82	1.13		28.6
AEH33200C-1	23.21		589.5	1.96		49.8	4.87		123.7	4.09		103.82	1.13		28.6
AEH35090B-1	22.63		574.8	2.31		58.7	4.02		102.1	3.36		85.26	1.32		33.4
AEH35140B-1	22.52		571.9	2.31		58.7	4.87		123.7	4.09		103.82	1.13		28.6
AEH35175B-1	22.52		571.9	2.31		58.7	4.87		123.7	4.09		103.82	1.13		28.6
AEH35225B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4
AEH35285B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4
AEH35350B-1	22.92		582.2	2.31		58.7	5.52		140.1	5.52		112.2	1.32		33.4

ACRADYNE MID-EXIT CABLE NUTRUNNERS

FEATURES AND BENEFITS

- Length
 - Reduced tool length due to cable exiting in front of grip surface
- Ergonomics
 - Reduced torque reaction compared to pistol-style tools
 - The inline handle, coupled with the ergonomic hand positioning, allows for increased leverage and decreased strain on the wrist
- Cable management
 - If used with a spring balancer, the tool hangs naturally near its center of gravity, the cable is controlled by the balancer
 - Front positioning of cable provides for easy cable management

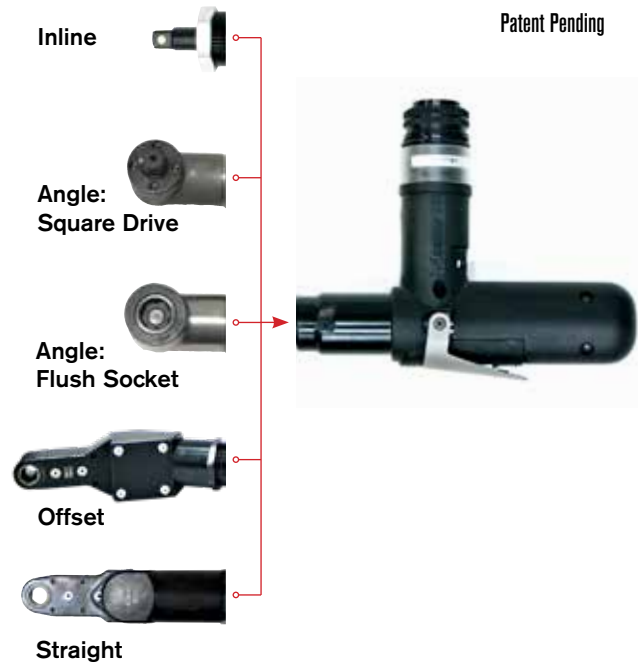


Specialized heads and blades available by request.
Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

APPLICATION DATA

MODEL*	NM	MAX TORQUE	FT-LB	NM	TORQUE RANGE	FT-LB	FREE SPEED RPM	LB	WEIGHT (-) SOCKET	KG	OUTPUT DRIVE
AEN4C22015BM(F)	15		11	3.75 - 15		2.77 - 11	700	2.6		1.18	3/8 sq. dr.
AEN4F22030BM(F)	30		22	7.5 - 30		5.53 - 22	675	3.3		1.50	3/8 sq. dr.
AEN4F22037BM(F)	37		29	9.25 - 37		6.82 - 29	533	3.3		1.50	3/8 sq. dr.
AEN4F22044BM(F)	44		32	11 - 40		8.11 - 29	432	3.3		1.50	3/8 sq. dr.
AES4A22020BVM	20		15	5 - 20		3.7 - 15	1050	2.4		1.09	3/8 sq. dr.
AES4A22025BVM	25		18	6.3 - 25		4.6 - 18	830	2.4		1.09	3/8 sq. dr.
AES4A22030BVM	30		22	7.5 - 30		5.5 - 22	672	2.4		1.09	3/8 sq. dr.
AES4A22040BVM	40		30	10 - 40		7.4 - 30	525	2.4		1.09	3/8 sq. dr.

* Add "F" to part numbers for flush socket.

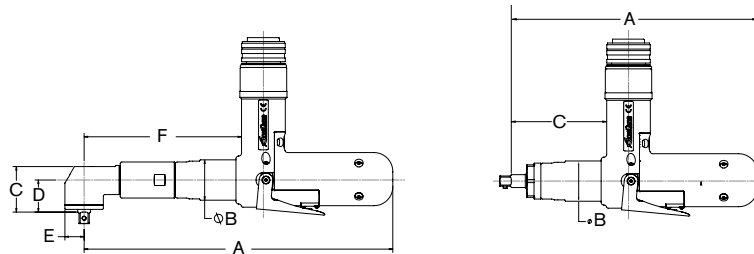

DIMENSIONS

MODEL	IN	(A)	MM	IN	(B)	MM	IN	(C)	MM	IN	(D)	MM	IN	(E)	MM	IN	(F)	MM
AEN4C22015BM	9.02		229.1	1.47		37.3	1.29		32.8	.82		20.9	.52		13.1	5.53		140.4
AEN4F22030BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AEN4F22037BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AEN4F22044BM	11.24		285.6	1.47		37.3	1.66		42.1	1.17		29.7	.70		17.8	5.73		145.6
AES4A22020BM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22025BM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22030BM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-
AES4A22040BM	9.0		228.1	1.47		37.3	3.49		88.6	-		-	-		-	-		-

ACRADYNE RIVET NUTRUNNERS

FEATURES AND BENEFITS

- Pull-to-torque tool/controller system ensures accurate, repeatable, and measurable tightening every time
- 1000 & 2000 series tools available with bottom exit, rear exit, or top exit cable configurations. Straight, Fixtured, and Push-to-Start models are available by request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368
- Simple, quick mandrel change design
- Low-friction coating on mandrel for extended life
- Precise control of rivet compression with Torque and Angle detection capability
- Suitable for a wide range of material thicknesses — limited only by rivet nut size
- Data collection and networking capabilities to capture and utilize result data for QMS systems and line controls
- Multi-function button (MFB) provides increased flexibility
- On-board lights and audible signal for operator feedback
- Works with rivet sizes M4 – M10 or 8-32 – 3/8-16




Bottom Exit Cable



Top Exit Cable



Rear Exit Cable



APPLICATION DATA

MODEL*	MAX TORQUE		TORQUE RANGE		FREE SPEED	WEIGHT (-) SOCKET		OUTPUT	(A)		(B)		(C)		(D)*	
	NM	FT-LB	NM	FT-LB	RPM	LB	KG	SQ DR	IN	MM	IN	MM	IN	MM	IN	MM
1000 SERIES*																
AEP4(A)(R)(T)12006BR	6	4.4	1.5 - 6	1.1 - 4.4	2,625	2.2	1.00	3/8	9.68	245.9	1.05	26.7	6.01	152.6	1.96	49.8
AEP4(A)(R)(T)12011BR	11	8.1	2.8 - 11	2 - 8.1	1,313	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12014BR	14	10	3.5 - 14	2.6 - 10	1,037	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12018BR	18	13	4.5 - 18	3.3 - 13	840	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)12022BR	22	16	5.5 - 22	4.1 - 16	656	2.3	1.04	3/8	9.68	245.9	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22020BR	20	15	5 - 20	3.7 - 15	1,313	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22030BR	30	22	7.5 - 30	5.5 - 22	840	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8
AEP4(A)(R)(T)22040BR	40	30	10 - 40	7.4 - 30	656	2.4	1.09	3/8	10.18	258.6	1.05	26.7	6.87	174.5	1.96	49.8

* Add "A" to part numbers for bottom exit cable models, Add "R" to part numbers for rear exit cable models, Add "T" to part numbers for top exit cable models.



Straight Series



Push-to-Start Series



Fixtured Series



ACRADYNE HIGH TORQUE DC TOOLS

Critical bolting demands tools that deliver high torque with superior performance. Couple with AcraDyne's Controller, the HT Series tools combine these features in an electric, high-torque bolting system that beats the competition in accuracy, speed, and safety.

FEATURES AND BENEFITS

- One of the most accurate high-torque tools in the world today
- Up to 100 times faster than hydraulic tools
- 250 Nm – 12,000 Nm
- Ergonomic, robust design with five handle configurations
- Over 300 models to choose from
- Built-in integral transducer for optimal monitoring and control
- The world's ONLY traceable system at the square drive
- Data retrieval
- Designed and **MADE IN THE USA**



Straight Lever Type (AES)



Pistol Type (AEP)



Rear Mounted Pistol (AED)



Axial Type (AEJ)



Fixtured Type (AEF)

FIXED GEARCASE MODEL*	SERIES	APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE	SOUND LEVEL
		NM	FT-LB	RPM	KG	LB	MM	IN	MM	IN	IN	dB(A)
(AEP) (AED) (AES) (AEJ) (AEF)4A66250B	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66425B	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66625B	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A66925B	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
(AEP) (AED) (AES) (AEJ) (AEF)4A771200B	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A773000B	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B1	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
(AEP) (AED) (AES) (AEJ) (AEF)4A884200B	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A885000B	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A896500B	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AED) (AES) (AEJ) (AEF)4A898100B	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
(AEP) (AEJ)4A8X12000B	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

* Add "B" to the end of the model number for bottom exit cable (AEF fixtured models only).

360° SWIVEL GEARCASE MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED	WEIGHT		LENGTH		DIA.		DRIVE	SOUND LEVEL
		NM	FT-LB	RPM	KG	LB	MM	IN	MM	IN	IN	dB(A)
(AEP) (AEJ)4B66250B	6000	250	185	315	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B66425B	6000	425	315	165	5.3	12	305	12	66	2.6	0.75	66
(AEP) (AEJ) (AED)4B66625B	6000	625	460	106	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B66925B	6000	925	682	72	5.5	12	305	12	66	2.6	0.75	66
(AEP) (AEJ)4B771200B	7000	1200	885	65	7.3	16	310	12.2	76	3.0	1	66
(AEP) (AEJ)4B773000B	7000	3,000	2,213	25	8.2	18	345	13.6	76	3.0	1	66
(AEP) (AEJ)4B884200B1	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1	66
(AEP) (AEJ)4B884200B	8000	4,200	3,100	12	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AEJ)4B885000B	8000	5,000	3,700	9	11.8	26	391	15.4	86	3.6	1.5	66
(AEP) (AEJ)4B896500B	8000/9000	6,500	4,800	7	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AEJ)4B898100B	8000/9000	8,100	6,000	5	16.4	36	429	16.9	101	4.0	1.5	66
(AEP) (AEJ)4B8X12000B	8000/9000	12,000	8,850	3.5	24.0	52.5	564	22	131	5.2	1.5	66

ACRADYNE HIGH TORQUE DC ANGLE TOOLS

FEATURES AND BENEFITS

- Transducerized closed loop control at the output like all AcraDyne HT-Series tools
- These low-profile head, small-diameter, lever-operated tools, with the torque measured at the output, offer a unique solution
- The torque reported is the torque delivered
- One of the most accurate high-torque right-angle tools in the world
- Smallest tools of their kind on the market
- Same durable, high-cycle gearing as our other HT-series tools
- Models up to 12,000 Nm available upon request



AEN3571000A



AEN356540A




AEN3571600A



AEN3572600A

SPECIFICATIONS

MODEL	MAX. TORQUE*		TORQUE RANGE		FREE SPEED RPM	WEIGHT		OUTPUT DRIVE
	NM	FT-LB	NM	FT-LB		LB	KG	
AEN356540A	540	398	135 - 540	100 - 398	109	13.1	5.95	3/4" Square Drive
AEN3571000A	1,000	737	250 - 1,000	184 - 737	61	16.3	7.39	1" Square Drive
AEN3571600A	1,600	1,180	400 - 1,600	295 - 1,180	33	16.7	7.57	1" Square Drive
AEN3572600A	2,600	1,917	650 - 2,600	479 - 1,917	21	18.5	8.40	1" Square Drive

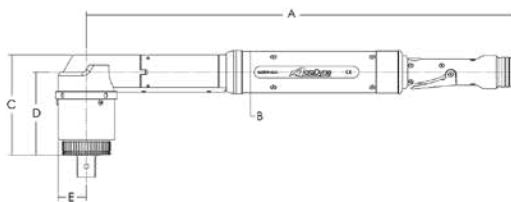

DIMENSIONS	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
AEN356540A	22.58	573.6	2.31	58.7	4.75	120.6	4.05	102.8	1.33	33.7
AEN3571000A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3571600A	22.92	582.2	2.31	58.7	5.36	136.1	4.44	112.7	1.53	38.7
AEN3572600A	22.92	582.2	2.31	58.7	6.77	171.9	5.86	148.8	1.53	38.7

ACRADYNE HIGH TORQUE DUAL LEVER AND GEARHEAD TOOLS

DUAL LEVER TOOLS

FEATURES AND BENEFITS

- Additional safety when using a tool with a reaction bar or nose extension
- Requires both hands to start the tool, keeping hands clear of application
- Helps avoid accidental starting of the tool
- Available in three handle types: "Handle Bar" (F) style, Straight (S) style with side handle, Pistol (P) style, and J-Handle (J) style



FIXED GEARCASE MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED RPM	WEIGHT		LENGTH		DIA.		DRIVE IN	SOUND LEVEL dB(A)
		NM	FT-LB		KG	LB	MM	IN	MM	IN		
AE(S)(F)(P)4A66250BDL	6000	250	185	315	3.9	9	203	8	66	2.6	0.75	66
AE(S)(F)(P)4A66425BDL	6000	425	315	165	3.9	9	203	8	66	2.6	0.75	66
AE(S)(F)(P)4A66625BDL	6000	625	460	106	4.1	9	203	8	66	2.6	0.75	66
AE(S)(F)(P)4A66925BDL	6000	925	682	72	4.1	9	203	8	66	2.6	0.75	66
AE(S)(F)(P)4A771200BDL	7000	1,200	885	65	5.9	13	208	8.2	76	3.0	1	66
AE(S)(F)(P)4A773000BDL	7000	3,000	2,213	25	6.8	15	243	9.6	76	3.0	1	66
AE(S)(F)(P)4A884200B1DL	8000	4,200	3,100	12	10.4	23	289	11.4	86	3.6	1	66
AE(S)(F)(P)4A884200BDL	8000	4,200	3,100	12	10.4	23	289	11.4	86	3.6	1.5	66
AE(S)(F)(P)4A885000BDL	8000	5,000	3,700	9	10.4	23	280	11.4	86	3.6	1.5	66
AE(S)(F)(P)4A896500BDL	8000/9000	6,500	4,800	7	15.0	33	327	12.9	101	4.0	1.5	66
AE(S)(F)(P)(J)4A898100BDL	8000/9000	8,100	6,000	5	15.0	33	327	12.9	101	4.0	1.5	66
AEF4A8X12000BDL	8000/9000	12,000	8,850	3.5	22.3	48.5	475	19.0	131	5.2	1.5	66

- For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side

360° SWIVEL GEARCASE MODEL	SERIES	APPROX. TORQUE		APPROX. SPEED RPM	WEIGHT		LENGTH		DIA.		DRIVE IN	SOUND LEVEL dB(A)
		NM	FT-LB		KG	LB	MM	IN	MM	IN		
AE(S)(F)(P)4B66250BDL	6000	250	185	315	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4B66425BDL	6000	425	315	165	4.6	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4B66625BDL	6000	625	460	106	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4B66925BDL	6000	925	682	72	4.8	10.5	254	10	66	2.6	0.75	66
AE(S)(F)(P)4B771200BDL	7000	1,200	885	65	6.6	14.5	259	10.2	76	3.0	1	66
AE(S)(F)(P)4B773000BDL	7000	3,000	2,213	25	7.5	16.5	294	11.6	76	3.0	1	66
AE(S)(F)(P)4B884200B1DL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1	66
AE(S)(F)(P)4B884200BDL	8000	4,200	3,100	12	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4B885000BDL	8000	5,000	3,700	9	11.1	24.5	340	13.4	86	3.6	1.5	66
AE(S)(F)(P)4B896500BDL	8000/9000	6,500	4,800	7	15.7	34.5	378	14.9	101	4.0	1.5	66
AE(S)(F)(P)(J)4B898100BDL	8000/9000	8,100	6,000	5	15.7	34.5	378	14.9	101	4.0	1.5	66
AEF4B8X12000BDL	8000/9000	12,000	8,850	3.5	23.0	51.0	526	21	131	5.2	1.5	66

- For Straight Type tools Choose the position of the handle by adding (L) for left side and (R) for right side



NOSE EXTENSIONS

FEATURES AND BENEFITS


- Ideal for hard-to-reach applications when a torque tube, or arm, is not desirable
- A cost-effective, more flexible option compared to a multiple spindle system
- Common applications:
 - Wheel install and repair stations
 - Large flange assembly
 - Mining vehicle shovel bolts
 - Railway equipment maintenance
 - Oil and gas industry well fixtures



18594.009



28050

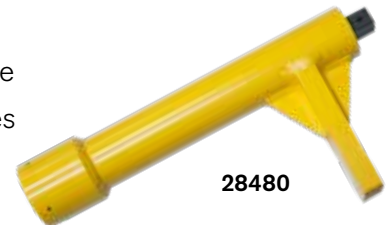

28480

HT GEARHEAD TOOLS

FEATURES AND BENEFITS

- Application-specific, custom made tools fit virtually any application
- Same durable gearing as found on AcraDyne's standard HT series tools
- Model types available:
 - HT Offset Gearhead tools
 - HT Right Angle with Offset Gearhead tools
 - HT Right Angle Air tools with Offset Gearhead

Custom accessories are available for your application. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



ACRADYNE HIGH TORQUE ACCESSORIES

ACCESSORIES

Custom accessories are available for your application; contact an AIMCO Customer Service Associate for details, 1-503-254-6600, or toll free 1-800-852-1368.

Swivel Handle



Swivel Bail



Fixed Handle

Hoist Ring



Fixed Handle with Hoist Ring

MODEL	DESCRIPTION
26477	Swivel Bail, 6000 Series
26327	Swivel Bail, 7000 Series
26630	Swivel Bail, 8000 Series
26478	Swivel D-Handle, 6000 Series
26328	Swivel D-Handle, 7000 Series
25291	Swivel D-Handle, 8000 Series
26479	Stationary Bail, 6000 series (26336 handle not included)
26332	Stationary Bail, 7000 series (26336 handle not included)
25289	Stationary Bail, 8000 series (26336 handle not included)
26336	Fixed Handle (for use with 26479, 26332, 25289)
26337	Rear Fixed Hoist Ring, 6000/7000/8000 Series Pistols
28514	Rear Folding Hoist Ring Kit for 8000 Series Pistols
28549	Sliding Spindle, 6000 Series
27045	Sliding Spindle, 7000 Series
30300	Sliding Spindle, 8000 Series

REACTION BARS



HT tool includes a standard, spline attachment reaction device. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

	MODEL	DESCRIPTION
 Single Ended Flat	26810	6000 Series
	26800	7000 Series
	25277	8000 Series
	27255	9000 Series
	30303	8X Series
 Single Ended Offset	26815	2.375" Offset, 6000 Series
	26885	4.00" Offset, 6000 Series
	27200	3.10" Offset, 7000 Series
	26890	4.00" Offset, 7000 Series
	25274	3.35" Offset, 8000 Series
	25275	4.00" Offset, 8000 Series
	26840	3.35" Offset, 9000 Series
 Double Ended Flat	30306	5.00" Offset, 8X Series
	26830	6000 Series
	26820	7000 Series
	25278	8000 Series
 Double Ended Offset	25276	3.35" Offset, 8000 Series

PROTECTIVE COVERS



Durable protective covers prevent marring and damage.

MODEL	DESCRIPTION
BJ10078	Protective Cover, 6000 Series
BJ10077	Protective Cover, 7000 Series
BJ10076	Protective Cover, 8000 Series

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

		LENGTH		WEIGHT		TORQUE, Nm																					
MODEL	RPM**	IN	MM	LB	KG	5	10	15	20	25	50	75	100	125	150	175	200	225	250	275	300	325	350	375	400	425	450
ANGLE																											
AEN4C12004B	3,111	11.65	295.9	2.0	0.91	█																					
AEN4C12009B	1,750	11.00	279.5	2.2	1.00	█	█																				
AEN4C12014B	875	11.66	296.4	2.2	1.00	█	█	█																			
AEN4C12018B	691	11.66	296.4	2.2	1.00	█	█	█	█																		
AEN4C12022B	560	11.66	296.4	2.2	1.00	█	█	█	█	█																	
AEN32015C	1,481	14.6	371.0	2.7	1.22		█	█																			
AEN32025C	833	14.6	371.0	2.7	1.22	█	█	█	█	█	█																
AEN32030C	803	14.4	366.2	2.8	1.27	█	█	█	█	█																	
AEN32040C	574	14.4	366.2	2.8	1.27		█	█	█	█	█																
AEN33042C	1,095	16.6	422.3	4.4	2.00		█	█	█	█																	
AEN33053C	1,095	16.6	422.3	4.4	2.00			█	█	█	█	█															
AEN33060C	845	18.9	480.5	6.6	2.99			█	█	█	█																
AEN33090C	568	18.9	480.5	6.6	2.99				█	█	█	█	█														
AEN33120C	442	21.0	533.5	9.3	4.22				█	█	█	█	█	█													
AEN33200C	245	23.2	589.6	9.4	4.26					█	█	█	█	█	█	█	█	█									
AEN33210C	234	23.6	599.9	10.0	4.54						█	█	█	█	█	█	█	█	█								
AEN33300C	151	23.6	599.0	10.0	4.54							█	█	█	█	█	█	█	█	█	█						
AEN33375C	151	23.6	599.0	10.0	4.54								█	█	█	█	█	█	█	█	█	█	█				
AEN35090B	607	22.6	573.7	6.9	3.13					█	█	█															
AEN35140B	472	22.5	571.9	10.4	4.72						█	█	█	█													
AEN35175B	384	22.5	571.9	10.5	4.76							█	█	█	█												
AEN35225B	291	22.9	581.1	12.3	5.58								█	█	█	█	█										
AEN35285B	236	22.9	581.1	12.3	5.58									█	█	█	█	█	█	█							
AEN35350B	191	22.9	581.1	12.3	5.58										█	█	█	█	█	█	█	█					
INLINE																											
AES4A12003BQ	2,625	11.12	282.7	2.0	0.91	█																					
AES4A12006BQ	2,625	11.12	282.7	2.0	0.91	█	█																				
AES4A12011BV	1,313	11.44	290.5	2.2	1.00	█	█	█																			
AES4A12014BV	1,037	11.44	290.5	2.2	1.00	█	█	█	█																		
AES4A12018BV	840	11.44	290.5	2.2	1.00	█	█	█	█	█																	
AES4A12022BV	656	11.44	290.5	2.2	1.00	█	█	█	█	█	█																
AES32010CV	2,222	13.9	351.7	2.5	1.13	█	█																				
AES32020CV	1,250	13.9	351.7	2.5	1.13	█	█	█																			
AES32025CV	893	13.9	351.7	3.2	1.45	█	█	█	█																		
AES32038CV	595	16.7	424.0	4.2	1.91		█	█	█	█																	
AES33040CV	1,314	18.2	463.4	6.4	2.90			█	█	█	█																
AES33060CV	883	18.2	463.4	6.4	2.90				█	█	█	█															
AES33100CV	489	22.6	573.0	8.1	3.67					█	█	█	█														
AES33150CV	329	22.6	573.0	8.1	3.67						█	█	█	█	█												
AES33230CV	221	22.6	573.0	8.1	3.67							█	█	█	█	█	█										
AES33230C-2	221	22.6	573.0	8.1	3.67								█	█	█	█	█	█									
AES33400CV	122	24.9	632.5	13.0*	5.90*									█	█	█	█	█	█	█	█	█	█	█	█	█	█
AES33600CV**	82	24.9	632.5	13.0*	5.90*										█	█	█	█	█	█	█	█	█	█	█	█	█
AES35075AV	944	21.9	555.2	9.2	4.17					█	█	█															
AES35090AV	767	21.9	555.2	9.2	4.17						█	█	█														
AES35110AV	634	21.9	555.2	9.2	4.17							█	█	█													
AES35135AV	515	21.9	555.2	9.2	4.17								█	█	█												
AES35170AV	418	21.9	555.2	9.2	4.17									█	█	█											
AES35280A	236	24.2	615.1	12.8	5.81										█	█	█	█	█	█							
AES35350A	192	24.2	615.1	12.8	5.81											█	█	█	█	█	█	█	█	█	█	█	█
AES35420A	159	24.2	615.1	12.8	5.81												█	█	█	█	█	█	█	█	█	█	█
AES35515A***	129	24.2	615.1	12.8	5.81													█	█	█	█	█	█	█	█	█	█
AES35635A****	104	24.2	615.1	12.8	5.81														█	█	█	█	█	█	█	█	█

Visit our website www.aimco-global.com

DC TOOLS: TOOL/SPINDLE SELECTION GUIDE

[illegible]

* **Torque Range:** 128 - 515 Nm

**** Torque Range: 159 - 635 Nm**



HIGH TORQUE SERIES

		LENGTH		WEIGHT		TORQUE, Nm																			
MODEL	RPM**	IN	MM	LB	KG	50	100	200	300	400	500	600	850	1100	1200	1300	1500	2000	2500	3000	4000	5000	6500	8100	12000
()4(A)(B)66200B	315	12	305	12	5.3																				
()4(A)(B)66425B	165	12	305	12	5.3																				
()4(A)(B)66625B	106	12	305	12	5.5																				
()4(A)(B)66925B	72	12	305	12	5.5																				
()4(A)(B)771200B	65	12.2	310	16	7.3																				
()4(A)(B)773000B	25	13.6	345	18	8.2																				
()4(A)(B)884200B1	12	15.4	391	26	11.8																				
()4(A)(B)884200B	12	15.4	391	26	11.8																				
()4(A)(B)885000B	9	15.4	391	26	11.8																				
()4(A)(B)896500B	7	16.9	429	36	16.4																				
()4(A)(B)898100B	5	16.9	429	36	16.4																				
()4(A)(B)8X12000B	3.5	22	564	52.5	24.0																				

Recommended Torque Range


Max Torque

ACRADYNE ACCESSORIES

CABLE ASSEMBLIES

The AcraDyne DC electric nutrunner tool system uses a single cable to carry all necessary conductors for superior ergonomics and durability.

- Flexible polyurethane cover for maximum durability, abrasion and transmission fluid resistant
- Quick disconnects at both ends facilitate tool changeover and troubleshooting
- The CAN data/signal is via RJ45 for products such as the KDM, socket tray or computer

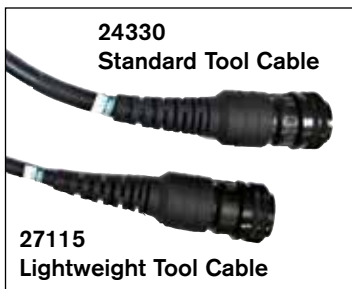

MODEL	DESCRIPTION	LENGTH	
		M	FT
TOOL CABLES			
24330	Cable G3 Tool Cable 3M	3	9.8
25350	Cable G3 Tool Cable 5M	5	16.4
24320	Cable G3 Tool Cable 10M	10	32.8
27110	Cable G3 Tool Cable 3M Lightweight*	3	9.8
27115	Cable G3 Tool Cable 5M Lightweight*	5	16.4
27122	Cable G3 Tool Cable 10M Lightweight*	10	32.8
EXTENSIONS			
24320	Extension cable 10M	10	32.8
25518	Extension cable 20M	20	65.6

*Lightweight cables are for use only with 1000 & 2000 Series tools.

CABLE ADAPTERS AND CONNECTORS

	MODEL	DESCRIPTION
ADAPTERS AND CONNECTORS		
	25646	G1 iEC to G3 Cable Adapter
	26934	G3 iEC to G1 Cable Adapter
	27210	G3 Tool to G1 Cable Adapter
	26364	Right Angle Cable Adapter
	26594	Conversion Kit G1 iEC to G3 iEC
	27370	Conversion Kit G3 iEC to G1 iEC
	25491	Breakaway Cable Connector – Ensures disconnect of cable should stress in excess of 40 lbs. occur
	30355	Y Cable Harness connects G4 iAC controller and controller's I/O to tool's EC/MCCBL cable. Compatible with UA-40S(D)MC, UA-50S(D)MC, UA-60S(D)MC, UA-70SMC, and UA-150MC tools.

DATA INTERFACE OPTION

	MODEL	DESCRIPTION
DATA INTERFACE OPTIONS		
	27348	I/O Wiring Connector – Simple module to facilitate connections to I/O on iEC Controllers
	28292	System Port Cable, USB 2.0 Cable, A Male to B Male, 3M

CABLE TESTER UNIT

AcraDyne's Cable Tester Unit helps diagnose and verify functionality of AcraDyne Tool Cables.

- Eliminate guesswork as to whether cable is damaged or is functioning within specifications
- Verifies each specific conductor within the cable for continuity

	MODEL	DESCRIPTION
	26700	Cable Tester Unit, G3
	26709	Adapter, G3 Tool to G1 Cable (Cable Tester only)

ACRADYNE ACCESSORIES



30850 FRL Assembly Kit

FRL ASSEMBLY KIT

For use with the iAC controller, AcraDyne's FRL assembly kit includes a regulator and solenoid. The kit attaches to the controller or can operate as a stand-alone unit.



SOCKET TRAY

Socket trays, for use with iEC and UEC Controllers, are supplied with blank socket pucks machined to fit specific sockets for the application. AIMCO provides this machining as an additional service. When ordering, please specify the outer dimensions of the sockets you plan to use, and whether you would like a quote for the machining service.

- Simply remove the assigned socket to select the application to be run
- Quick and easy set up. Parameters assigned to socket position automatically
- Optional self-illuminating socket receptacles
- Delrin® blanks may be easily machined by the customer to accommodate custom socket profiling
- Nothing to break, wear out, or maintain
- Proximity sensors detect presence of socket



MODEL	DESCRIPTION
AMPST-2-I	2-Position Socket Tray for iEC Controllers, 2 x 1, 1.25" Socket
AMPST-2-U	2-Position Socket Tray for UEC Controllers, 2 x 1, 1.25" Socket
AMPST-4-I	4-Position Socket Tray for iEC Controllers, 2 x 2, 1.25" Socket
AMPST-4-U	4-Position Socket Tray for UEC Controllers, 2 x 2, 1.25" Socket
AMPST-6S-I	6-Position Socket Tray for iEC Controllers, 6 x 1, 1.25" Socket
AMPST-6S-U	6-Position Socket Tray for UEC Controllers, 6 x 1, 1.25" Socket
AMPST-6-I	6-Position Socket Tray for iEC Controllers, 3 x 2, 1.25" Socket
AMPST-6-U	6-Position Socket Tray for UEC Controllers, 3 x 2, 1.25" Socket
AMPST-8-I	8-Position Socket Tray for iEC Controllers, 4 x 2, 1.25" Socket
AMPST-8-IL	8-Position Socket Tray for iEC Controllers, 4 x 2, 2.0" Socket
AMPST-8-U	8-Position Socket Tray for UEC Controllers, 4 x 2, 1.25" Socket

Socket trays with 6 - 8 positions are available in varied configurations to suit workspace requirements (straight or double rows). Please let your AIMCO representative know of your specific requirements when inquiring.

SLIDING SPINDLES



MODEL	DESCRIPTION
20712	Sliding Spindle 2" Stroke 2000 Series Tools, 3/8" Drive
20848	Sliding Spindle 2" Stroke 3000 Series Tools, 1/2" Drive
28843	Spindle Assembly, 2" Stroke, 5000 Series, 3/4" Drive

BAR CODE SCANNER



28859
Bluetooth®-Enabled Scanner Kit

Sturdy bar code scanners allow you to easily scan small, stacked, or poorly printed, one-dimensional bar codes. Kit includes a cradle, power supply, and USB/Ethernet cable.

- Scratch proof, tempered glass exit window
- Single-circuit board construction eliminates common interconnection failures
- Industrial long-life charging contacts can withstand 250,000+ insertions into cradle
- Wireless scanner enables users to hold scanner at any angle

MODEL	DESCRIPTION
20400	RS232 Barcode Reader Kit
28859	RS232 Wireless Barcode Reader Kit

LIGHT TOWER



23730

Cost- and energy-efficient LED light tower is visible from any direction, angle, and distance

- Two built-in alarms (FB Type) with selectable sound patterns
- Adjustable Volume (Max. 85 dB at 1 m)
- Tower includes red, yellow, green, blue, and clear lenses



28489 Light Tower Bracket for Gen IV Controller

ANGLE TOOL BODY JACKETS

Keep tools protected with AIMCO's tool Body Jackets.



MODEL	DESCRIPTION
BJ10051	For 1000 series angle tools
BJ10052	For 2015, 2025 series angle tools
BJ10053	For 2030, 2040, 2055 series angle tools
BJ10054	For 3060, 3090 series angle tools
BJ10055	For 3120, 3200 series angle tools

TOOL STORAGE

Tool baskets and tool hangers are a great way to keep a tool in place when not being used.

UNIVERSAL TOOL BASKET

Interchangeable among angle head and pistol grip tool models throughout the industry.



21226


VERTICAL TOOL HANGER

Designed for AcraDyne Gen 1 tools.



21159

CONTROLLER BRACKETS

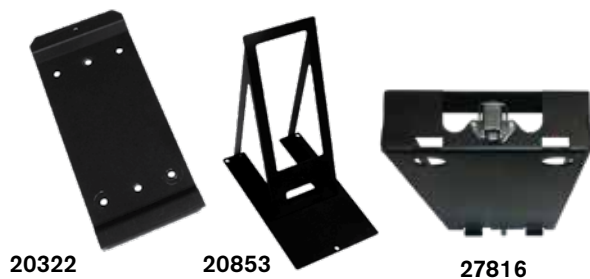

MODEL	DESCRIPTION
20322	Basic wall-mounting plate
20853	Table stand free standing platform
27816	Mounting bracket with internal wireways

TOOL BAILS

- AcraDyne's spring bails are designed for use with any of the AcraDyne 1000, 2000, or 3000 Series tools
- Spring bails snap on quickly and firmly at any place on the body of the tool for perfect balance and secure suspension

	MODEL	DESCRIPTION
	25501	Wire Bail for 1000 Series Tools
	27594	Stationary Bail for 1000 Series Tools
	27791	Rotating Bail Assembly for 1000 Series Tools
	26568	Cable Bail to Hang Tool Vertically for Gen III Cables
	21208	Spring Bail for 2000 Series Tools
	23662	Rotating Bail for 2000 Series Tools
	28475	Rotating Bail for AEN33042C and AEN33053C
	23575	Rotating Bail for 3000 Series Tools

MOUNTING BRACKETS

	MODEL	DESCRIPTION
	25717	Mounting Bracket for 1000 Series Angle Tools
	25843	Mounting Bracket for 1000 Series Push-To-Start Tools
	26443	Mounting Bracket for 1000/2000 Series Straight and Pistol Tools
	24924	Mounting Flange for 1000/2000 Series Straight and Pistol Tools
	28622	Mounting Flange for 2000 Series Inline Tools
	30340	Mounting Bracket for 2000 Series Angle Tools
	30351	Mounting Bracket, Drive End for 2000 Series Inline Tools
	25718	Mounting Bracket for 3000/5000 Series Angle Tools
	26570	Mounting Bracket for 3000/5000 Series Straight Tools
	25265	Angle head Mounting Bracket (Cradle type) for 3000/5000 Angle Tools over 225 Nm
	26394	Mounting Flange for 5000 Series

ACRADYNE CORDLESS TOOLS

UNMATCHED ACCURACY

FEATURES AND BENEFITS

- Pistol Tool Torque Range: 1.5–14 Nm
Angle Tool Torque Range: 1.5–120 Nm
Straight Tool Torque Range: 1.5–14 Nm
- Transducerized for precise delivery of torque and angle to the fastener
- Self-contained with on-board control
- Load tool programming software through USB cable interface
- Vibration alarm handle provides tactile feedback
- Programmable
 - Torque
 - Angle
 - RPM
 - Time
 - Fastening direction
- 100 PSET
- Six step, multi-stage job functionality
- Multicolor LED status screen
- 150,000 results stored on-board



ABP Pistol Models



ABS Straight Models



ABN Angle Models



ABT Tubenut Models

MODEL	TORQUE RANGE		MAX SPEED RPM	DRIVE TYPE	WEIGHT W/O BATTERY	
	NM	FT-LB			KG	LB
PISTOL						
ABP-CTA11Q(WQ)(BQ)(WBQ)	1.5 - 11.0	1.1 - 8.1	570	1/4" QC	1.15	2.5
ABP-CTA14Q(WQ)(BQ)(WBQ)	3.0 - 14.0	2.2 - 10.3	460	1/4" QC	1.15	2.5
ANGLE						
ABN-CTA10(W)(B)(WB)	1.5 - 10.0	1.1 - 7.4	570	3/8" Sq.	1.35	3.0
ABN-CTA12(W)(B)(WB)	2.5 - 12.0	1.8 - 8.9	380	3/8" Sq.	1.4	3.1
ABN-CTA20(W)(B)(WB)	5.0 - 20.0	3.7 - 14.8	300	3/8" Sq.	1.2	2.6
ABN-CTA30(W)(B)(WB)	8.0 - 30.0	5.9 - 22.1	170	3/8" Sq.	1.2	2.6
ABN-CTA55(W)(B)(WB)	15.0 - 55.0	11.1 - 40.6	90	3/8" Sq.	1.4	3.1
ABN-CTA90(W)(B)(WB)	25.0 - 90.0	18.4 - 66.4	60	1/2" Sq.	2.9	6.4
ABN-CTA120(W)(B)(WB)	35.0 - 120	25.8 - 88.5	50	1/2" Sq.	3.1	6.8
STRAIGHT						
ABS-CTA11Q(WQ)(BQ)(WBQ)	1.5 - 11.0	1.1 - 8.1	570	1/4" QC	0.95	2.1
ABS-CTA14Q(WQ)(BQ)(WBQ)	3.0 - 14.0	2.2 - 10.3	460	1/4" QC	0.95	2.1
TUBENUT						
ABT-CTA20W	5.0 - 20.0	3.7 - 14.8	300	3/8" Sq.	1.2	2.6

W = WiFi option B = Barcode option Q = Quick Change

ACRADYNE CORDLESS TOOLS

BATTERIES

- Up to 40% lighter than Ni-MH batteries
- Deep-discharge protection prevents battery failure



AB-B1825LI



AB-B1850LI

BATTERY MODEL #	VOLTAGE	TYPE	CAPACITY	WEIGHT
AB-B1825LI	18V	Li-Ion	2.5 Ah	.8 Lb/.35 kg
AB-B1850LI	18V	Li-Ion	5.0 Ah	1.3 Lb/.6 kg



AB-C18110

BATTERY CHARGERS

- Battery defect detection
- Microprocessor-controlled charging: Charging time is dependent on the capacity of the battery
- Reverse polarity protection
- Automatic battery voltage detection
- Multi-bay charger includes battery adapters




AB-C18-4W

MODEL	DESCRIPTION	OUTPUT	INPUT	CHARGING TIME	DIMENSIONS (W/O BATTERY)	WEIGHT
AB-C18110	Quick-charge unit for 110V	14.4V - 18V, 3.0A	110VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" (W) x 4.21" (H) x 6.02" (D) 86 mm (W) x 107 mm (H) x 153 mm (D)	1.2 Lb/.55 kg
AB-C18220	Quick-charge unit for 220V	14.4V - 18V, 3.0A	220-240VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	3.39" (W) x 4.21" (H) x 6.02" (D) 86 mm (W) x 107 mm (H) x 153 mm (D)	1.2 Lb/.55 kg
AB-C18-4W	4-bay charge unit for 100-240VAC	14.4V - 18V, 3.0A	100-240VAC, 50-60Hz	Max 55 min for 2.5 Ah battery	21.2" (W) x 7.2" (H) x 10.2" (D) (incl. feet) 539 mm (W) x 182 mm (H) x 260 mm (D) (incl. feet)	16.8 Lb/7.6 kg

TOOL DIMENSIONS

MODEL	A		B		C		D		E	
	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM
PISTOL										
ABP-CTA11Q(WQ)(BQ)(WBQ)	9.1	230	1	26	8.6	218	4.5	115	-	-
ABP-CTA14Q(WQ)(BQ)(WBQ)	9.1	230	1	26	8.6	218	4.5	115	-	-
ANGLE										
ABN-CTA10(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA12(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA20(W)(B)(WB)	17.8	451	3.7	95	1.3	33	4.5	115	0.8	21
ABN-CTA30(W)(B)(WB)	20.6	523	6.8	173	1.7	42	4.5	115	1.1	29
ABN-CTA55(W)(B)(WB)	22	559	8.2	209	1.7	42	4.5	115	1.1	29
ABN-CTA90(W)(B)(WB)	25.7	653	11.9	303	1.9	49	4.5	115	1.4	35
ABN-CTA120(W)(B)(WB)	28.1	715	14.4	365	2.8	71	4.5	115	2.1	54
STRAIGHT										
ABS-CTA11Q(WQ)(BQ)(WBQ)	17.2	437	3.2	81	0.8	20	4.5	115	-	-
ABS-CTA14Q(WQ)(BQ)(WBQ)	17.2	437	3.2	81	0.8	20	4.5	115	-	-

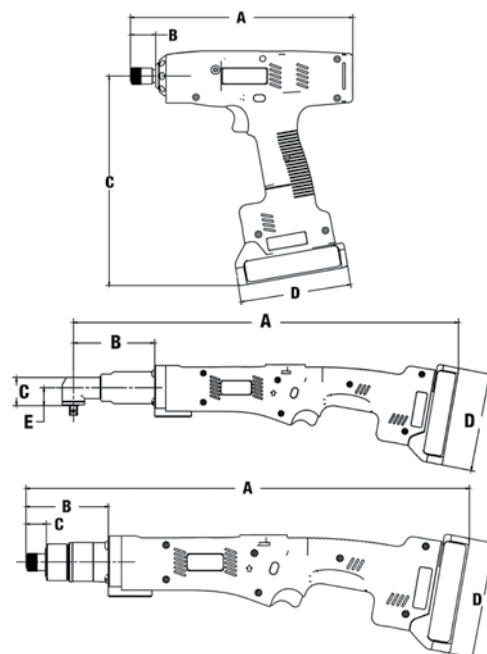

ACRADYNE SYSTEMS



MULTIPLE NUTRUNNING SYSTEMS

AIMCO can integrate the AcraDyne tool spindle into a customized Multiple Nutrunning system. From simple systems vertically suspended above the part, to assembly stations that integrate with your line, AIMCO can effectively accommodate your project.

LET US KNOW YOUR REQUIREMENTS AND WE WILL PROPOSE A SOLUTION TAILORED TO YOUR NEEDS.



FEATURES AND BENEFITS

- Nutrunner sequencing - Allows nutrunners to be sequenced at each phase of the tightening process, providing even distribution of torque and load to each fastener. This prevents part damage and distortion
- Snug threshold, final torque in one pass - No need for multiple torque stage sequencing. Fixtured nutrunners save time and effort
- No missed fasteners - Multiple nutrunners have a spindle dedicated to each location, ensuring quality on every rundown on every bolt
- Better residual torques - Synchronized controlled fastening allows residual torque levels to be consistent with the dynamic torque specification
- Saving in cycle time - Compared to using a single nutrunner tool with many rundowns, running all fasteners simultaneously reduces in-station cycle time
- Cost saving benefits - Saving installation cycle time frees operators to handle additional tasks and potentially reduce labor costs
- Collect data – Most common methods of collecting data for quality control and statistical analysis can be implemented from a serial data string using RS232 to formatted data from a network database

INDUSTRY APPLICATIONS

- Harvester chain-pull assembly, 2-spindle
- Engine flywheel assembly, 3-spindle
- Wheel lug nut assembly, 4-spindle
- Axle u-bolt assembly, 4-spindle
- Gasoline generator assembly, 6-spindle
- Lawn mower motor assembly, 7-spindle
- Air-cooled small vehicle engine assembly, 10-spindle

TOOL SPECIALS




AIMCO can provide customized tooling solutions for even the most unique applications. Let us propose a solution tailored to your needs. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.




UA-MC SERIES

MAGNETOSTRICTIVE TRANSDUCER

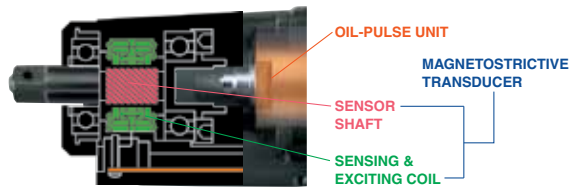

Uryu's brushless Magnetostrictive Torque Transducer consists of an anvil and a pair of sensor coils. Without contacting the anvil, the sensor coil detects load to the Anvil (non-contact). The grooves in the anvil are provided at a 45 degree angle in one region. When torque is applied to the anvil, tensile stress appears on the region and magnet permeability increases. These permeability changes are detected, respectively transformed to the voltage change (proportional to applied torque), and converted to torque signals to control the tool.

SYSTEM LAYOUT

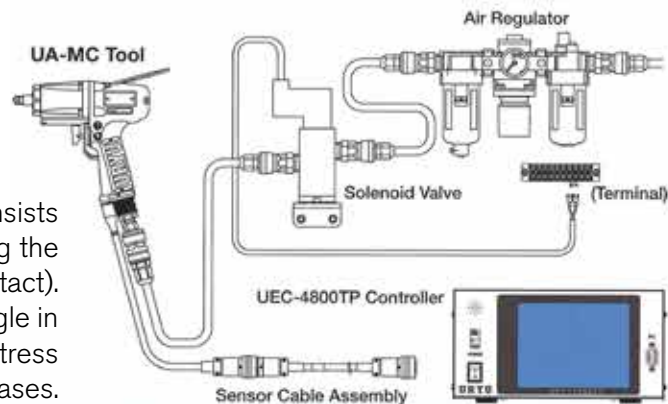

UA-MC SERIES

FEATURES AND BENEFITS

- Patented Auto Relief Technology provides additional torque control during pulsing events
- External solenoid valve increases power-to-weight ratios by 20%
- Magnetostrictive Transducer provides durability with low size and weight
- All models work with any UEC Series controller and can connect to a wide range of network protocols
- With torque reaction virtually non-existent, allowing for one-handed operation, the UA-MC provides significantly increased productivity



RECOMMENDED AIR PRESSURE: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED RPM	LENGTH		WEIGHT		DRIVE SIZE IN	AIR USAGE CFM
	NM	FT-LB		MM	IN	LB	KG		
PISTOL TYPE									
UA-40MC	6.8 - 12.0	5.0 - 8.8	3,600	170	6.7	2.4	1.1	3/8	7.0
UA-40DMC	6.9 - 12.0	5.0 - 8.8	3,600	170	6.7	2.4	1.1	1/4 QC	7.0
UA-50MC	16.6 - 29.0	12.2 - 21.4	4,250	170	6.7	2.4	1.1	3/8	8.8
UA-50DMC	16.6 - 29.0	12.2 - 21.4	4,250	170	6.7	2.4	1.1	1/4	8.8
UA-60MC	25.1 - 44.0	18.5 - 32.5	5,000	175	6.9	2.5	1.1	3/8	14.0
UA-70MC	28.5 - 50.0	21.0 - 37.0	5,700	187	7.4	2.7	1.2	3/8	15.8
UA-80MC	40.0 - 60.0	29.6 - 44.4	6,000	195	7.7	3.4	1.6	3/8	16.8
UA-90MC	45.7 - 80.0	33.8 - 59.2	5,500	203	8.0	3.7	1.7	1/2	18.6
UA-100MC	51.4 - 90.0	38.0 - 66.6	5,200	215	8.5	4.5	2.1	1/2	19.3
UA-130MC	74.2 - 130.0	54.9 - 96.2	4,500	233	9.2	6.2	2.8	1/2	25.6
UA-150MC	150 - 220	111 - 163	4,350	251	9.9	8.8	4.0	3/4	24.7
STRAIGHT TYPE									
UA-40SMC	7.0 - 13.0	5.2 - 9.6	3,600	246	9.7	2.7	1.2	3/8	7.0
UA-40SDMC	5.0 - 12.0	3.7 - 8.9	3,600	246	9.7	2.7	1.2	1/4	7.0
UA-50SMC	11.0 - 25.0	8.1 - 18.5	4,250	246	9.7	2.7	1.2	3/8	8.8
UA-50SDMC	9.0 - 23.0	6.7 - 17.0	4,250	246	9.7	2.7	1.2	1/4	8.8
UA-60SMC	18.0 - 38.0	13.3 - 28.1	5,000	252	10.0	2.9	1.3	3/8	14.0
UA-60SDMC	16.0 - 34.0	11.8 - 25.2	5,000	252	10.0	2.9	1.3	1/8	14.0
UA-70SMC	30.0 - 50.0	22.2 - 37.0	5,700	265	10.4	3.1	1.4	3/8	15.8


Air Inlet: 1/4" N.P.T.

Recommended Air Hose Size: 1/4" I.D. for UA-40MC - UA-50MC 3/8" I.D. for UA-60MC - UA-100MC 1/2" I.D. for UA-130MC - UA-150MC

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UA-AMC SERIES

SYSTEM LAYOUT

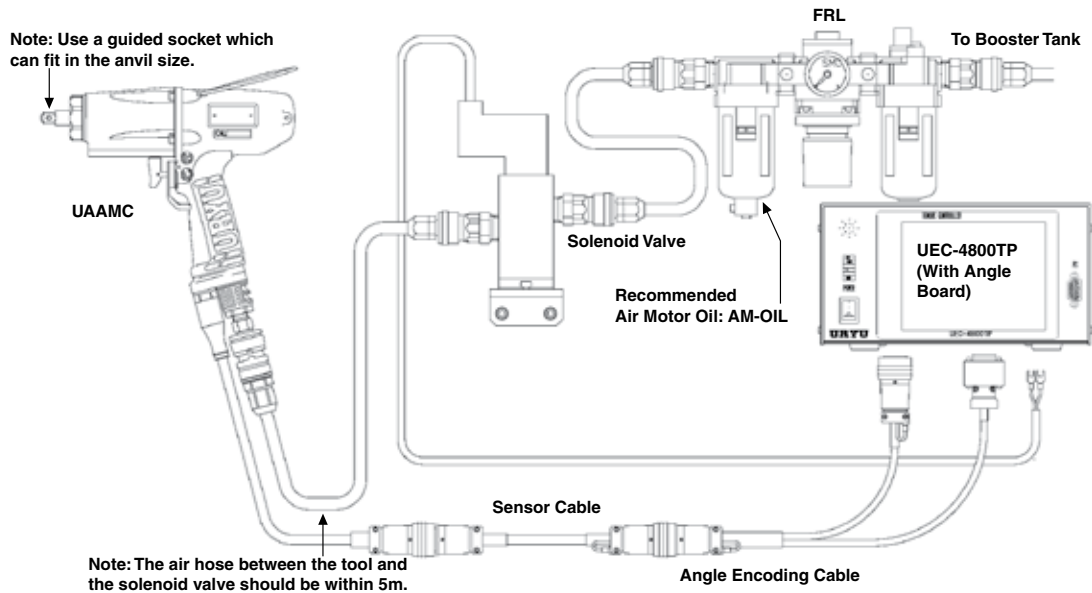

UA-AMC SERIES €

FEATURES AND BENEFITS

- The UA-AMC features angle measurement for improved process control
- No torque reaction
- Detects cross threading, double hits on the same fastener, stripped and damaged fastener threads, and incorrect fasteners in an application
- Transducer integrated resolver
- Patented Auto Relief Technology provides smooth torque delivery during pulsing events
- Triple chamber air motors for high power output in UA-400AMC, UA-500AMC, and UA-600AMC models
- UEC-4800 controllers can easily be upgraded to angle-capable models. Contact your AIMCO representative for details, 1-503-254-6600, or toll free 1-800-852-1368



RECOMMENDED AIR PRESSURE: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED	LENGTH			WEIGHT		DRIVE SIZE	AIR USAGE
	NM	FT-LB		MM	IN	LB	KG		IN	CFM
UA-400AMC	7 - 13	5.2 - 9.6	3,600	193.0	7.6	3.0	1.4		3/8	7.0
UA-500AMC	11 - 25	8.1 - 18.4	4,250	193.0	7.6	3.0	1.4		3/8	8.8
UA-600AMC	18 - 38	13.3 - 28.0	5,000	198.5	7.8	3.1	1.4		3/8	14.0
UA-700AMC	30 - 50	22.1 - 36.9	5,700	207.5	8.2	3.3	1.5		3/8	15.8
UA-800AMC	40 - 60	29.5 - 44.3	6,000	215.5	8.5	3.7	1.7		3/8	16.8
UA-900AMC	40 - 80	29.5 - 59.0	5,500	227.5	9.0	4.7	2.2		1/2	18.6
UA-1000AMC	50 - 90	36.9 - 66.4	5,200	235.0	9.3	5.4	2.5		1/2	19.3
UA-1300AMC	85 - 130	62.7 - 95.9	4,500	256.5	10.1	7.2	3.3		1/2	25.6

Air Inlet: 1/4" N.P.T.

Recommended Air Hose Size: 1/4" I.D. for UA-400AMC - UA-500AMC

3/8" I.D. for UA-600AMC - UA-1000AMC

1/2" I.D. for UA-1300AMC

* € logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

Visit our website www.aimco-global.com

UEC-4800 CONTROLLER

STATE-OF-THE-ART CONTROLLER FOR PULSE TOOLS

FEATURES AND BENEFITS: UEC-4800

- Programmable from front panel or PC – no separate touchpad module or cable required
- 12,000 data point memory
- On-screen statistical readout
- Eight parameter sets available
- Increased programmable I/O options
- Built-in Ethernet connectivity
- PC Windows-based software included
- For use with pneumatic or electric transducerized tools
- Compatible with: UA-MC, UEP-MC (with driver box), UA-SMC, UA-AMC (with optional Angle Encoder Board), ALPHA-MC, and UXR-MC series tools



UEC-4800



UEC-4800TP Controller
with Touch-Screen option.



UEC-4800-EX Controller
with network connectivity

FEATURES AND BENEFITS: UEC-4800TP

- Provides all features of the UEC-4800
- Enhanced user interface via Touch-Screen programming and information access

MODEL	24V I/O	URYU DATA, BARCODE, & PRINTER	LIGHT TOWER & BYPASS SWITCH CAPABLE	ETHERNET PROTOCOLS	SERIAL PROTOCOLS & BAR CODE	ANYBUS DEVICENET	ANYBUS PROFIBUS	TOUCH PANEL DISPLAY	ANGLE MONITORING
UEC-4800	X	X							
UEC-4800A-ANGLE	X	X							X
UEC-4800TP	X	X						X	
UEC-4800TPA	X	X						X	X
UEC-4800-EX	X	X		X	X				
UEC-4800-EXL	X	X	X	X	X				
UEC-4800-EDA	X			X		X			
UEC-4800-EPA	X			X			X		
UEC-4800-EPAL	X		X	X			X		
UEC-4800A-EXL	X	X	X	X	X				X
UEC-4800A-EDA	X			X		X			X
UEC-4800A-EDAL	X		X	X		X			X
UEC-4800A-EPA	X			X			X		X
UEC-4800A-EPAL	X		X	X			X		X
UEC-4800A-EPL	X		X	X			X*		X
UEC-4800TP-EX	X	X		X	X			X	
UEC-4800TP-EXL	X	X	X	X	X			X	
UEC-4800TP-EDA	X			X		X		X	
UEC-4800TP-EDAL	X		X	X		X		X	
UEC-4800TP-EPA	X			X			X	X	
UEC-4800TP-EPAL	X		X	X			X	X	
UEC-4800TPA-EX	X	X		X	X			X	X
UEC-4800TPA-EXL	X	X	X	X	X			X	X
UEC-4800TPA-EDA	X			X		X		X	X
UEC-4800TPA-EDAL	X		X	X		X		X	X
UEC-4800TPA-EPA	X			X			X	X	X
UEC-4800TPA-EPAL	X		X	X			X	X	X
UEC-5500	X	X							

*UEC-4800A-EPL includes MKS module with Profibus only.

UEC-4800A CONTROLLER

FEATURES AND BENEFITS: UEC-4800A


- Economical LCD front panel
- Easily program or upload your program from a PC
- Torque Wave data visible on your PC
- Memorizes max. 12,000 fastening data. When connected to a PC, standard deviations, Cp value, and Cpk values can be analyzed instantly from the stored data within the controller
- Graph statistical data



UEC-4800A SPECIFICATIONS

Power Supply	AC100 ~ 240V $\pm 10\%$	Display	Torque Resolution ± 2048 (12-Bit A/D) LCD: 20 characters x 4 lines Contents: Work No., Fastening Count, Down No., Fastening Time, Pulse No. 1-digit digital display (DPM): WORK NO. 4-digit digital display (DPM): TORQUE
Power Frequency	50/60 Hz		
Noise Protection	1000V 1 μ S (according to noise simulator)		
Insulation Protection	DC500V over 10M Ω		
Ambient Temperature	0 ~ 50°C (non-freezing)	LED	COUNT Lamp: OK (Green), NOK (Red) TORQUE Lamp: LOW (Yellow), OK (Green), HIGH (Red)
Ambient Humidity	Under 90%RH (no dew)		
Power Consumption	Approx. 30VA	Input Terminal Signal	Operation Voltage/Current: DC24V/approx. 10mA 6 terminals (free format), VALVE
Weight	Approx. 3.6 kg		
Dimensions	265(d) x 222(w) x 120(h)	Output Terminal Signal	Contact Capacity: AC:125V, 0.3A, DC:30V, 1A 6 terminals (free format), VALVE
Main Functions	Torque Monitoring/Control + Fastening Counter		
Parameter Setup	Manual Input on Front LCD Panel Personal Computer (with setup software)		

UEC-4800(A)(TP)(TPA) BLOCK DIAGRAM

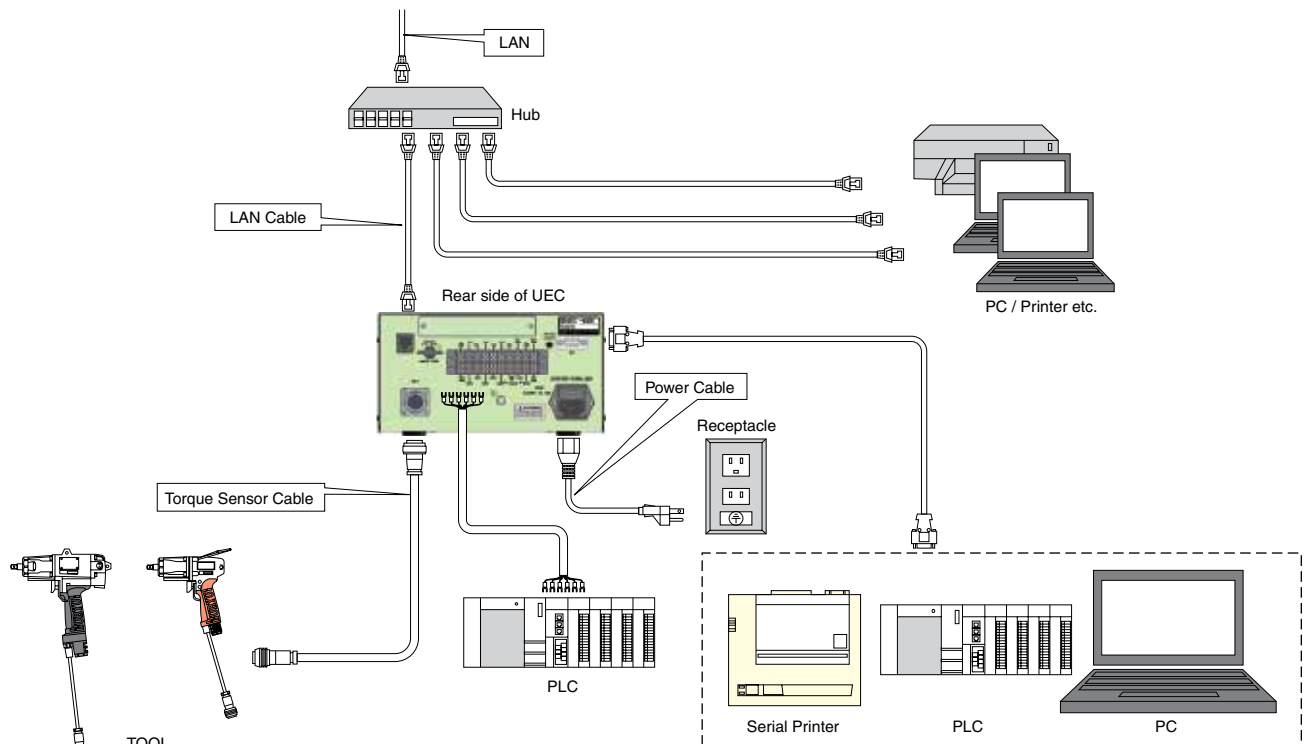

UEC-4800TP / TPA CONTROLLER

FEATURES AND BENEFITS: UEC-4800TP/TPA

- Programmable from front panel or PC
- Can be used with various transducerized tools:
 - Oil-Pulse Tools fitted with a Magnetostrictive Transducer: UA-MC series, ALPHA-MC Series, UEP-MC Series (UEPD driver is required separately)
 - Pneumatic Tools fitted with a Strain-Gauged Transducer UAN-M Series, UOW-M Series, UNR-NT Series
- Highly reliable torque control and monitor
- Ethernet (TCP/IP) capable
- Choose between Torque Control and Monitor. Detect various errors and control the job with the fastening counter
- Torque Wave data visible on both front touch panel and PC
- Can be used for eight different fastening applications
- Front panel, PC display, or buzzer indicates Input/Output (terminal blocks and tool wiring), checks, and errors
- Memorizes cumulative fastening numbers and pulse numbers from the start of operation
- Memorizes maximum 12,000 fastening data. Analyze standard deviations, Cp value, and Cpk value instantly from stored data within the controller. When connected to a PC, statistical data can be graphed
- Interlocks with production line using Input/Output terminals



Torque Monitor Display



UEC-4800TP/TPA SPECIFICATIONS

Power Supply	AC100 ~ 240V $\pm 10\%$
Power Frequency	50/60 Hz
Noise Protection	1000V 1 μ S (according to noise simulator)
Insulation Protection	DC500V over 10M Ω
Ambient Temperature	0 ~ 50°C (non-freezing)
Ambient Humidity	Under 90%RH (no dew)
Power Consumption	Approx. 30VA
Weight	Approx 3.6 kg
Dimensions	265(d) x 222(w) x 120(h)
Main Functions	Torque Monitoring/Control + Fastening Counter
Parameter Setup	Manual Input on Front Touch Panel Personal Computer (with setup software)
Display	Torque Resolution ± 2048 (12-Bit A/D) 320 x 240 dot 25 characters X 15 lines
LED	COUNT Lamp: OK (Green), NOK (Red) TORQUE Lamp: LOW (Yellow), OK (Green), HIGH (Red)
Input Terminal Signal	Operation Voltage/Current: DC24V/approx. 10mA 6 terminals (free format), VALVE
Output Terminal Signal	Contact Capacity: AC:125V, 0.3A, DC:30V, 1A 6 terminals (free format), VALVE


The conventional UEC-4800 Series has been superceded by UEC-4800(SD), which has the following new functions:

- 1) miniSD card slot on back panel
 - Fastening data and wave can be saved to miniSD card
 - Option to save and read setting values in miniSD card
- 2) Terminal on the rear side. The following terminals are added:

1 x Input terminal	2 x Input COM terminals
1 x Output terminal	2 x Output COM terminals
- 3) Valve Check
Valve wiring check function checks the valve connection to the terminal. If using ALPHA-MC fitted with the valve inside the tool, it checks the tool valve connection
- 4) Other Features
 - Increased PC communication speed to 115,200 bps
 - Faster data input and memory deletion

(Input Terminal Block)

Signal Allocations
COM: Common Terminal for the input terminals. (-)
IN 1 ~ 6: Input Terminals
IN COM: Common Terminal for the input terminals. (-)
OUT COM: Common Terminal for the output terminals.

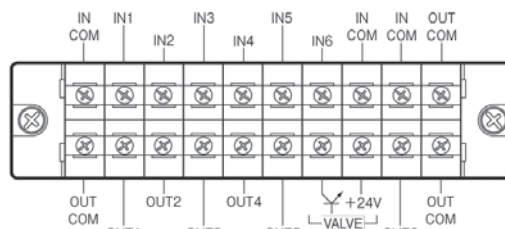

(Output Terminal Block)

Signal Allocations
COM: Common Terminal for the output terminals.
OUT 1 ~ 5: Output Terminals
VALVE: Valve Output (OV)
VALVE COM: +24V
Out 6: Output Terminal
OUT COM: Common Terminal for the output terminals

UDBP-AF SERIES

UDBP-AF: THE ULTIMATE BATTERY PULSE TOOL



UDBP-AF60Z(P)

FEATURES AND BENEFITS

- New Auto Relief Function
- Minimal noise and vibration
- Torque sensor incorporated into the UDBP-AF series measures torque *and* angle
- Lithium-ion battery
- Extremely accurate
- Stores up to 10,000 pieces of data

MODEL	TORQUE RANGE		FREE SPEED	LENGTH		HEIGHT W/O BATTERY		WEIGHT W/O BATTERY		DRIVE SIZE	BATTERY	
	NM	FT-LBS	RPM	MM	IN	MM	IN	KG	LBS	IN	VDC	AH
ZIGBEE MODELS												
UDBP-AF50Z(P)-STA	5 – 15	3.7 – 11	4,800	229	9	265	10.4	1.88	5	3/8	10.8	2.0
UDBP-AF60Z(P)-STA	8 – 25	5.9 – 18.4	4,800	243	9.6	265	10.4	2.04	5.5	3/8	14.4	2.0
UDBP-AF70Z(P)-STA	15 – 45	11 – 33	4,800	254	10	270	10.6	2.41	6.5	3/8	18	3.0
DISPLAY MODELS												
UDBP-AF50(P)-STA	5 – 15	3.7 – 11	4,800	229	9	265	10.4	1.88	5	3/8	10.8	2.0
UDBP-AF60(P)-STA	8 – 25	5.9 – 18.4	4,800	243	9.6	265	10.4	2.04	5.5	3/8	14.4	2.0
UDBP-AF70(P)-STA	15 – 45	11 – 33	4,800	254	10	270	10.6	2.41	6.5	3/8	18	3.0

Each model supplied as a kit including: 1-tool, 2-batteries, 1-charger, 1-body jacket

UDBP-AF SERIES



EYFB32



EYFB41



EYFB50

BATTERIES AND BATTERY CHARGER

BATTERY MODEL #	DESCRIPTION	VOLTAGE	TYPE	CAPACITY
EYFB32	Battery for UDBP-AF50 Series	10.8V	Li-Ion	2.0Ah
EYFB41	Battery for UDBP-AF60 Series	14.4V	Li-Ion	2.0Ah
EYFB50	Battery for UDBP-AF70 Series	18V	Li-Ion	5.0Ah
CHARGER MODEL #				
EY0L82B				



EY0L82B

Display Type



UDBP-AFxx(P)

Connect to Programmer

232C
Communication
Cable
#910-395-0



UDBP-AFSET

OR

Connect to PC

232C
Communication
Cable
#910-395-0



UDBP-AF Software is available
at no additional cost.




BODY JACKET

863-991-1



MODEL	DESCRIPTION
863-991-1	Body jacket for all UDBP-AF tools

SYSTEM LAYOUT

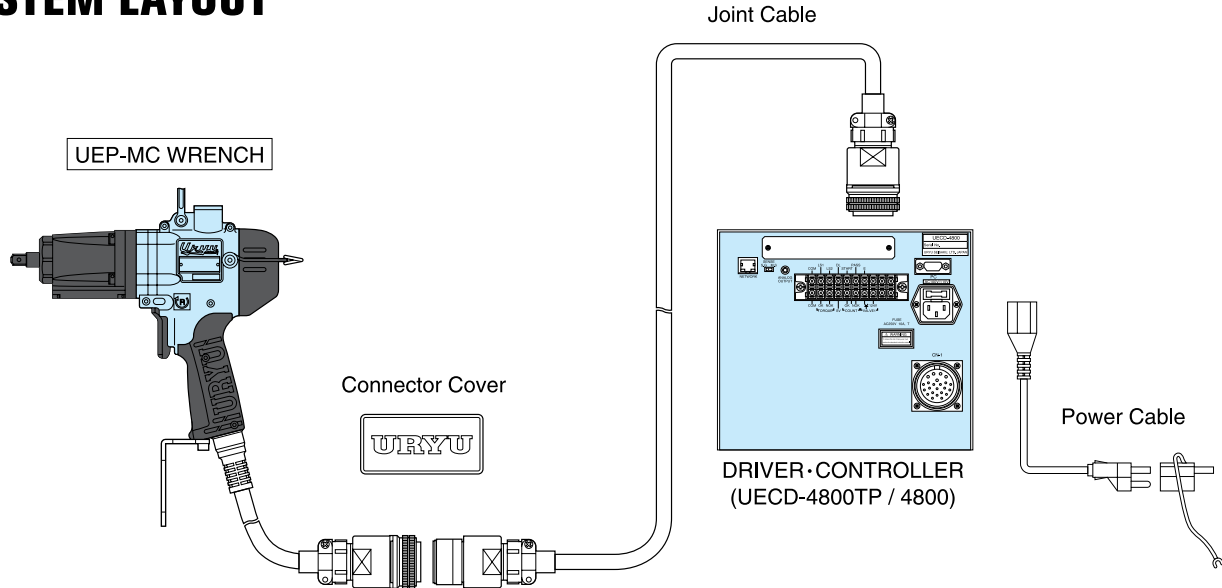

Uryu's UEP-MC series includes a unique Magnetostrictive Transducer designed to precisely measure dynamic torque. Highly accurate torque value and fastening count data is displayed by the UECD controller, making it easy to monitor the application.

UEP-MC SERIES

FEATURES AND BENEFITS

- Operates on standard 110V or 220V power
- Extremely durable, brushless motor
- Programmable tool RPM for increased accuracy and adjustability to joint conditions
- Two stage trigger for separate, slower RPM for soft start applications
- Quiet operation
- I/O capability for programmable line control
- Pulse tool advantages on applications that require controlled electric tools



MODEL	TYPE	TORQUE RANGE		FREE SPEED RPM	WEIGHT LB	LENGTH IN	DRIVE IN	SOUND LEVEL dB(A)	REQUIRED DRIVER BOX
		NM	FT-LB						
UEP-50MC(-STDA)*	Transducerized	5 - 10	3.7 - 7.4	2,000	4.0	7.9	3/8 sq.	70	UEPD-51A-UL
UEP-50DMC(-STDA)*	Transducerized	5 - 10	3.7 - 7.4	2,000	4.0	7.9	1/4 hex	70	UEPD-51A-UL
UEP-60MC(-STDA)*	Transducerized	10 - 25	7.4 - 18.5	2,000	4.7	8.7	3/8 sq.	70	UEPD-61A-UL
UEP-60DMC(-STDA)*	Transducerized	10 - 25	7.4 - 18.5	2,000	4.7	8.7	1/4 hex	70	UEPD-61A-UL
UEP-70MC(-STDA)*	Transducerized	25 - 40	18.5 - 29.6	2,000	5.2	9.3	3/8 sq.	72	UEPD-71A-UL
UEP-80MC(-STDA)*	Transducerized	30 - 60	22.2 - 44.4	2,000	6.6	9.3	1/2 sq.	75	UEPD-71A-UL
UEP-100MC(-STDA)*	Transducerized	60 - 120	44.4 - 88.8	2,000	9.2	10.9	1/2 sq.	75	UEPD-101A-UL

* Add "-STDA" to part numbers to include tool, driver box, and driver cable (components can be purchased individually).

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UECD-4800 CONTROLLER

UECD-4800 FOR UEP TOOLS

FEATURES AND BENEFITS

- Integrates Tool Driver and UEC-4800 Controller – No separate box
- Windows-based PC Software included
- Programmable tool speeds
- 4 Models to suit UEP Series tools



UECD-4800 FUNCTIONS AND SPECIFICATIONS

- Motor Setting
 - Motor current can be set in four steps
 - Motor rotational speed can be set in 100 rpm increments
- Fastening error detection and fastener number countdown functions ensure seamless operation
- Allows setup or changeover of fastening torque and fastening number count
- Tool's maintenance is possible by counting both total cycle numbers (how many fasteners) and/or total pulse numbers
- Input/Output check and error messages can be checked from your PC or the front panel of UECD-4800, which will notify you with a buzzer
- Can set up and monitor various control values. Values can be set either on the front panel or on the PC
- Ethernet (TCP/IP) capable. Upload and receive setting values. Upload fastening result/waveform data through PC software
- Power Supply: UEP tool is driven by commercial electricity, providing flexible assembly line changes

Power Supply	AC100 ~ 240V $\pm 10\%$
Power Frequency	50/60 Hz
Noise Protection	1000V 1 μ S (according to noise simulator)
Insulation Protection	DC500V over 10M Ω
Ambient Temperature	0 ~ 50°C (non-freezing)
Ambient Humidity	90%RH or less (no dew)
Weight	Approx. 11.30 kg
Dimensions	265(d) x 222(w) x 200(h)
Main Functions	Torque control, Torque monitoring, Fastener number count
Parameter Setup	Manual Input on Front LCD Panel PC (with exclusive setup software)
Display	Torque Resolution ± 2048 (12-Bit A/D use) LCD type, 20 characters x 4 lines Contents: Work No., Bolt Count No., Tightening Time, Pulse Blow Number 1-digit digital display (DPM): Work No. displayed 4-digit digital display (DPM): Torque reading displayed
LED	Total Lamp (for count judgment): OK (Green), NOK (Red) Torque Lamp (for torque judgment): LOW (Yellow), OK (Green), HIGH (Red)
Input Terminal Signal	Operation Voltage/Current: DC24V, approx. 10mA 6 terminals available (programmable). Note: Contact input necessary
Output Terminal Signal	Contact Capacity: DC 30V, 1A 6 terminals available (programmable), VALVE

UECD-4800 CONTROLLER

MODEL	24V I/O	URYU DATA, BARCODE & PRINTER	LIGHT TOWER & BYPASS SWITCH CAPABLE	ETHERNET PROTOCOLS	SERIAL PROTOCOLS & BAR CODE	ANYBUS DEVICENET	ANYBUS PROFIBUS	TOUCH PANEL DISPLAY
UECD-4800A-50	X	X						
UECD-4800A-60	X	X						
UECD-4800A-70	X	X						
UECD-4800A-100	X	X						
UECD-4800TPA-50	X	X						X
UECD-4800TPA-60	X	X						X
UECD-4800TPA-70	X	X						X
UECD-4800TPA-100	X	X						X
UECD-4800A-EX-50	X	X		X	X			
UECD-4800A-EXL-50	X	X	X	X	X			
UECD-4800A-EDA-50	X			X		X		
UECD-4800A-EDAL-50	X		X	X		X		
UECD-4800A-EPA-50	X			X			X	
UECD-4800A-EPAL-50	X		X	X			X	
UECD-4800A-EX-60	X	X		X	X			
UECD-4800A-EXL-60	X	X	X	X	X			
UECD-4800A-EDA-60	X			X		X		
UECD-4800A-EDAL-60	X		X	X		X		
UECD-4800A-EPA-60	X			X			X	
UECD-4800A-EPAL-60	X		X	X			X	
UECD-4800A-EX-70	X	X		X	X			
UECD-4800A-EXL-70	X	X	X	X	X			
UECD-4800A-EDA-70	X			X		X		
UECD-4800A-EDAL-70	X		X	X		X		
UECD-4800A-EPA-70	X			X			X	
UECD-4800A-EPAL-70	X		X	X			X	
UECD-4800A-EX-100	X	X		X	X			
UECD-4800A-EXL-100	X	X	X	X	X			
UECD-4800A-EDA-100	X			X		X		
UECD-4800A-EDAL-100	X		X	X		X		
UECD-4800A-EPA-100	X			X			X	
UECD-4800A-EPAL-100	X		X	X			X	
UECD-4800TPA-EX-50	X	X		X	X			X
UECD-4800TPA-EXL-50	X	X	X	X	X			X
UECD-4800TPA-EDA-50	X			X		X		X
UECD-4800TPA-EDAL-50	X		X	X		X		X
UECD-4800TPA-EPA-50	X			X			X	X
UECD-4800TPA-EPAL-50	X		X	X			X	X
UECD-4800TPA-EX-60	X	X		X	X			X
UECD-4800TPA-EXL-60	X	X	X	X	X			X
UECD-4800TPA-EDA-60	X			X		X		X
UECD-4800TPA-EDAL-60	X		X	X		X		X
UECD-4800TPA-EPA-60	X			X			X	X
UECD-4800TPA-EPAL-60	X		X	X			X	X
UECD-4800TPA-EX-70	X	X		X	X			X
UECD-4800TPA-EXL-70	X	X	X	X	X			X
UECD-4800TPA-EDA-70	X			X		X		X
UECD-4800TPA-EDAL-70	X		X	X		X		X
UECD-4800TPA-EPA-70	X			X			X	X
UECD-4800TPA-EPAL-70	X		X	X			X	X
UECD-4800TPA-EX-100	X	X		X	X			X
UECD-4800TPA-EXL-100	X	X	X	X	X			X
UECD-4800TPA-EDA-100	X			X		X		X
UECD-4800TPA-EDAL-100	X		X	X		X		X
UECD-4800TPA-EPA-100	X			X			X	X
UECD-4800TPA-EPAL-100	X		X	X			X	X

UDP-MC / ACRA-PULSE MC SERIES

UDP-MC SERIES

FEATURES AND BENEFITS

- High speed for increased productivity
- No torque reaction
- Magnetostrictive Transducer provides increased durability with reduced size and weight
- Auto relief pulse mechanism for measured application of tightening energy
- Durable 11 mm cable
- Use with UECP-4800A Controller with integrated driver box
- Automatic Ventilation System: Cooling fan is activated automatically when pulling the throttle trigger, which reduces heat and increases duty cycle
- Safety: To protect the operator, the UDP-MC tool stops operation immediately when failure is detected, including overloaded operation, short circuit, and broken wire



UDP-A60MC



UDP-A80MC

MODEL	TYPE	TORQUE RANGE		FREE SPEED RPM	WEIGHT LB	LENGTH IN	DRIVE IN	SOUND LEVEL dB(A)	REQUIRED DRIVER BOX
		NM	FT-LB						
UDP-A60MC	Transducerized	5 - 25	3.7 - 18.5	1,000 - 4,800	3.4	8.4	3/8 SQ.	74	n/a
UDP-A80MC	Transducerized	25 - 55	18.5 - 40.5	1,000 - 4,800	3.9	9.5	3/8 SQ.	76	n/a

ACRA-PULSE MC SERIES

FEATURES AND BENEFITS

- Electronically controlled built-in shut-off valve stops tool as soon as target torque is reached
- LED indicator shows Good or No Good after each tightening



UXR-1820MC



ALPHA-60SMC

Recommended air pressure: 85 PSI

MODEL	TORQUE RANGE		FREE SPEED	LENGTH		WEIGHT		DRIVE	NOISE LEVEL	AIR USAGE
	NM	FT-LB		RPM	MM	IN	LB			
PISTOL										
ALPHA-101MC	38 - 70	27.4 - 51.3	6,200	243	9.6	4.6	2.1	1/2 SQ.	80	17.6
UXR-1820MC	160 - 250	117.8 - 183.7	4,600	322	12.7	12.3	5.5	3/4 SQ.	84	24.7
INLINE										
ALPHA-60SMC*	10 - 17	7.2 - 14.4	6,300	280	11.0	2.6	1.4	3/8 SQ.	75	8.8
UXR-2400SMC	350 - 600	258.2 - 442.7	3,300	457	18.0	27.6	12.5	1.0 SQ.	85	35.3

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

N.P.T. 3/8" for UXR-1820MC

N.P.T. 1/2" for UXR-2400SMC

* External Solenoid Valve (909-749-0) Required

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UECP-4800 CONTROLLER

UECP-4800 - UDP TOOLS

FEATURES AND BENEFITS

- Integrates Tool Driver and UEC-4800 Controller – No Separate Box
- Windows-based PC software included
- Programmable tool speeds

UECP-4800 FUNCTIONS AND SPECIFICATIONS

- Motor Setting
 - Motor current can be set in four steps
 - Motor rotational speed can be set in 100 rpm increments
- Fastening error detection and fastener number countdown functions ensure seamless operation
- Allows setup or changeover of fastening torque and fastening number count
- Tool's maintenance is possible by counting both total cycle numbers (how many fasteners) and/or total pulse numbers
- Input/Output check and error messages can be checked from your PC or the front panel of UECP-4800, which will notify you with a buzzer
- Set up and monitor various control values on the front panel or on a PC
- Ethernet (TCP/IP) capable. Upload and receive setting values. Upload fastening result/wave-form data through PC software
- **Power Supply:** UDP tool is driven by commercial electricity, providing flexible assembly line changes



The UECP-4800 is an exclusive controller for UDP-MC Series, so it cannot be connected to other MC/EC tools.

Power Supply	AC100~240V ±10%
Power Frequency	50/60 Hz
Noise Protection	1000V 1μS (according to noise simulator)
Insulation Protection	DC500V over 10MΩ
Ambient Temperature	0~50°C (non-freezing)
Ambient Humidity	90%RH or less (no dew)
Weight	Approx. 11.30 kg
Dimensions	265(d) x 222(w) x 200(h)
Main Functions	Torque control, Torque monitoring, Fastener number count
Parameter Setup	Manual Input on Front LCD Panel PC (with exclusive setup software)
Display	Torque Resolution ±2048 (12-Bit A/D use) LCD type, 20 characters x 4 lines Contents: Work No., Bolt Count No., Tightening Time, Pulse Blow Number 1-digit digital display (DPM): Work No. displayed 4-digit digital display (DPM): Torque reading displayed
LED	Total Lamp (for count judgment): OK (Green), NOK (Red) Torque Lamp (for torque judgment): LOW (Yellow), OK (Green), HIGH (Red)
Input Terminal Signal	Operation Voltage/Current: DC24V, approx. 10mA 6 terminals available (programmable). Note: Contact input necessary
Output Terminal Signal	Contact Capacity: DC 30V, 1A 6 terminals available (programmable), VALVE

MODEL	24V I/O	URYU DATA, BARCODE, & PRINTER	LIGHT TOWER & BYPASS SWITCH CAPABLE	ETHERNET PROTOCOLS	SERIAL PROTOCOLS & BAR CODE	ANYBUS DEVICENET	ANYBUS PROFIBUS	TOUCH PANEL DISPLAY
UECP-4800A	X	X						
UECP-4800A-EX	X	X		X	X			
UECP-4800A-EXL	X	X	X	X	X			
UECP-4800A-EDA	X			X		X		
UECP-4800A-EDAL	X		X	X		X		
UECP-4800A-EPA	X			X			X	
UECP-4800A-EPAL	X		X	X			X	

CONTROLLED PULSE TOOL CABLES / CONTROLLER BRACKETS



910-623-0



EC/MCCBL-25



910-975-0



911-023-0

CONTROLLED PULSE TOOL CABLES

PART NUMBER	DESCRIPTION	FUNCTION	LENGTH		TOOL SERIES						CONTROLLER PLATFORM		
			M	FT	UA-MC	UA-AMC	UEP-MC	UDP-MC	ALPHA-MC	UXR-MC	UEC-4800	UECD-4800	UECP-4800
909-921-0	Sensor Cable Assy.	Tool Cable to Controller	5	18	X	X			X	X	X		
910-974-0	Joint Cable Assy.	Tool Cable to Controller	5	18				X					X
910-975-0	Joint Cable Assy.	Tool Cable to Controller	10	35				X					X
910-546-0	Joint Cable Assy.	Tool Cable to Controller	3	10			X					X	
910-547-0	Joint Cable Assy.	Tool Cable to Controller	5	18			X					X	
910-548-0	Joint Cable Assy.	Tool Cable to Controller	10	35			X					X	
EC/MCCBL-3	Sensor Cable Assy.	Tool Cable to Controller	1	3	X	X			X	X	X		
EC/MCCBL-10	Sensor Cable Assy.	Tool Cable to Controller	3	10	X	X			X	X	X		
EC/MCCBL-25	Sensor Cable Assy.	Tool Cable to Controller	7	25	X	X			X	X	X		
EC/MCCBL-30	Sensor Cable Assy.	Tool Cable to Controller	9	30	X	X			X	X	X		
EC/MCCBL-35	Sensor Cable Assy.	Tool Cable to Controller	10	35	X	X			X	X	X		
EC/MCCBL-40	Sensor Cable Assy.	Tool Cable to Controller	12	40	X	X			X	X	X		
EC/MCCBL-45	Sensor Cable Assy.	Tool Cable to Controller	13	45	X	X			X	X	X		
EC/MCCBL-50	Sensor Cable Assy.	Tool Cable to Controller	15	50	X	X			X	X	X		
EC/MCCBL-60	Sensor Cable Assy.	Tool Cable to Controller	18	60	X	X			X	X	X		
EC/MCCBL-75	Sensor Cable Assy.	Tool Cable to Controller	22	75	X	X			X	X	X		
911-023-0	Encoder "Y" Cable	Enables Angle Sensor. Splits Tool Cable to Controller	0.3	1		X					X*		
910-623-0	Sensor Cable Assy.	External Driver Box to Controller	0.3	1			X				X		

* Requires Controller with Angle Encoder Board installed



UEC-4800TRAY

UEC-4800 CONTROLLER BRACKET KIT

UEC-4800TRAY provides a stable platform for the UEC-4800 Controller.

- Flexible mounting configurations for easy access and viewing
- Provides compact storage of light tower and accessories with controller
- Durable, Powder Coat finish

TOOL HOLDERS

Rubber tool holders protect tool's torque sensor when not in use.



MODEL	USED FOR
852-644-1 KIT	ULT / UAT / UL 30 – 70 series UX 450 – 500 series UD-50 / UD-60 series
852-669-1 KIT	ULT / UAT / UL / UA-MC / UX / UX-T 612 – 800 series UW-6 / UW-ST6 series
852-645-1 KIT	UL T / UAT / UL / UA-MC 90 – 130 series UDBP-TA 70 series UX-T 700 series UW-8 / UW-9 series

FIXTURED F-SERIES NUTRUNNERS




FEATURES AND BENEFITS

- Reduced Cable Numbers – Integral type tube containing torque sensor cable and resolver cable
- Enhanced Memory Capacity – Designed with increased memory capacity for improved efficiency of assembly line and tightening data control
- Open Network Communication – Various communication boards are available (M-NET, Device net, Inter-bus, CC-link)
- Automatic Setting (Automatic recommended value input) – Advance value preparation per application will help you simplify your parameter setting
- Space Saving – One-piece spindle controller/driver unit reduces space occupancy by 40% to 60%

NO. OF SPINDLES	VOLUME & WIDTH BEFORE		VOLUME & WIDTH WITH F-SERIES					
	CM	MM	UEC-F024H		UEC-F060H		UEC-F120H	
1-Spindle	16,800	200	5,512	130	6,106	144	6,784	160
2-Spindle	24,360	290	8,056	190	9,243	218	10,600	250
5-Spindle	47,040	560	15,688	370	18,656	440	22,048	520
10-Spindle	84,840	1,010	28,408	670	34,344	810	41,128	970


F-SERIES NETWORK CONNECTIVITY

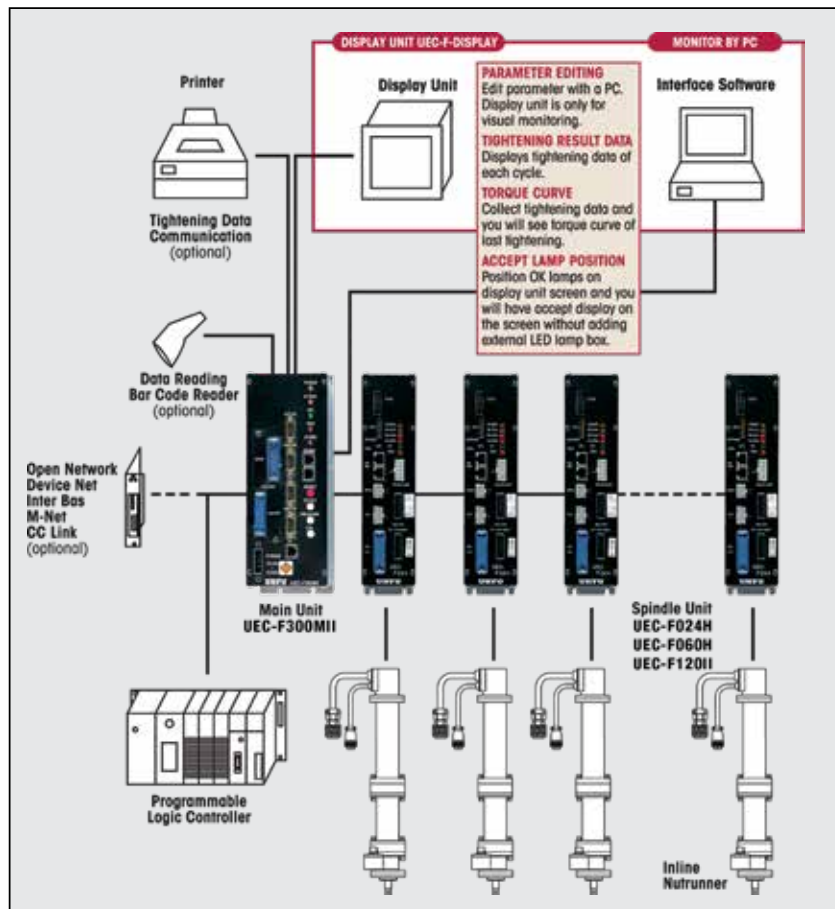


FIXTURED F-SERIES NUTRUNNERS

Main Unit UEC-F300MII

Controls up to 31 spindle units and directs fastening.

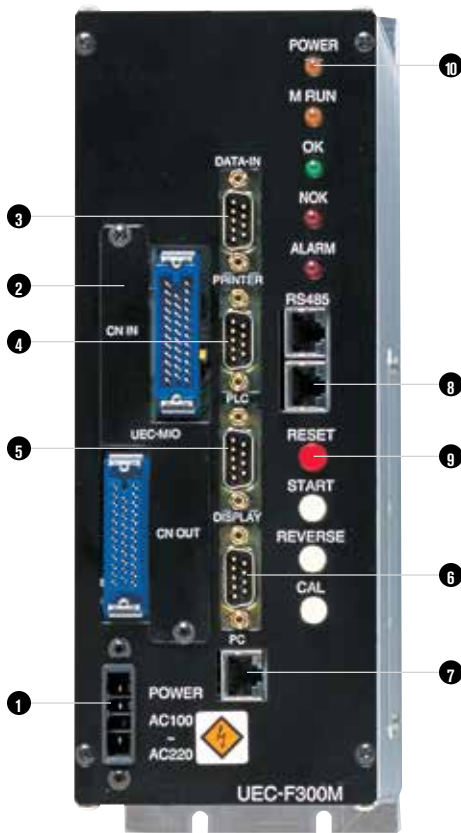

Spindle units UEC-F024H & UEC-F060H minus UEC-MKB

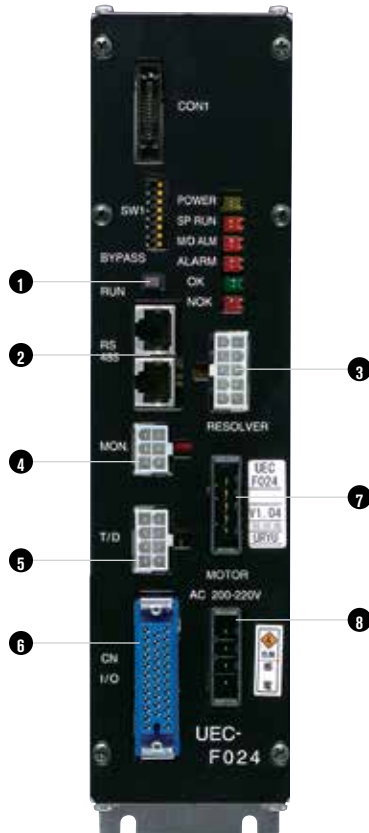

UEC-F024H with optional UEC-MKB display unit



1 Power Socket

AC100~220V single phase

2 External Input/Output Connector

PLC1: input signal connector for control signal input (fixed allocation)
PLC2: output signal connector for judgement result and status output (free allocation)

3 Serial Port (Data Input Connector)

RS232C DATA-IN accepts serial numbers, etc. provided by external equipment such as a barcode reader then outputs tightening data together with serial numbers

4 Serial Port (Data Output Connector)

RS232C PRINTER outputs tightening result data to your printer (free format)

5 Serial Port (Data Output Connector)

RS232C PLC outputs tightening result data to PLC (free format)

6 Serial Port (Data Output Connector)

RS485 outputs tightening result data to an external exclusive display unit

7 PC Connector

RS232C for communication with a PC

8 Spindle-to-Spindle Communication Connector

RS485 for internal spindle unit to spindle unit communications

9 Manual Switches

RESET, START, REVERSE and CAL

10 LED Display

POWER, M RUN, ACCEPT, REJECT and ALARM

1 Status Change Switch

RUN/BYPASS change switch
RUN: Operation possible status
BYPASS: Non-operation status

2 External Communication Device

RS485 connector

3 Resolver Connector

Tool and resolver connection

4 MON Connector (Monitor Output)

Analog torque electric pressure and angle pulse output

5 T/D Connector

Tools torque sensor connection

6 I/O Connector

External input and output control connection

7 MOTOR Connector

Connection with tools magnet motor

8 AC IN Connector

AC200V~220V 3-phase power socket

1 Manual Operation Switches

START: manual start switch
REVERSE: Manual reverse switch
CAL: Manual calibration switch
RESET: Manual reset switch



2 Data Display Operation Switch

MODE switch
SET switch
DATA UP switch
DATA DOWN switch

NOTE: Display unit (UEC-MKB) is an option

FIXTURED F-SERIES NUTRUNNERS

INLINE NUTRUNNERS

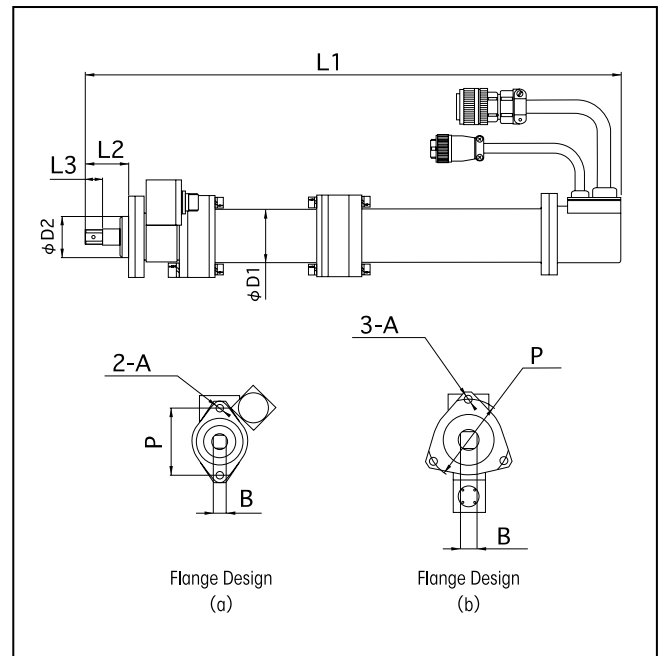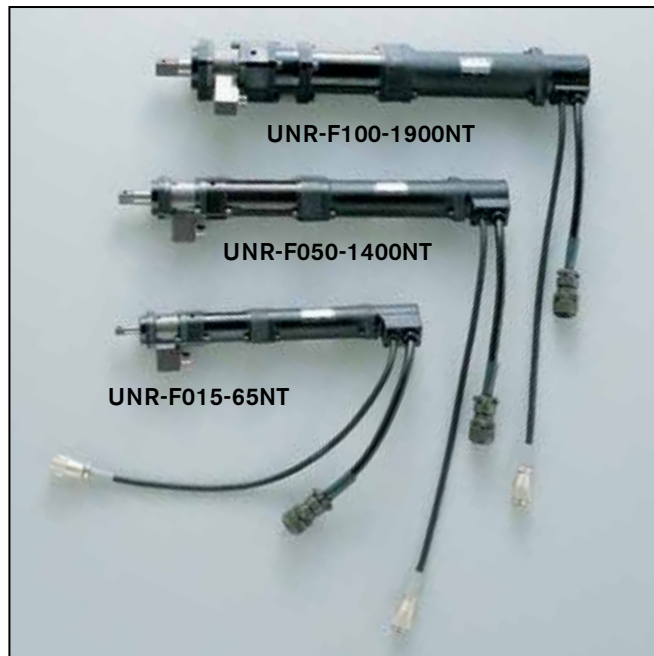

The “F” Series Nutrunner System will satisfy multiple tightening patterns.

- Torque tightening
- Spline press fit tightening
- Torque
- Pin hole alignment tightening
- Angle tightening
- Pre-load detection
- Angle
- Idle operation check
- Plastic range monitor

Rated Strain	2000X10-6
Output Voltage	1.0 mV/V
Non-Linearity	±0.5% R.O.
Influence on Zero Point Due to Temperature	±0.1% R.O./°C
Temperature Rating	-10 ~ +65°C
Input Output Resistance	480Ω
Maximum Input Voltage	16V
Insulation Resistance	Greater than 300Ω
Overload Capacity	150%


INLINE NUTRUNNER SPECIFICATIONS

MODEL	EXTERNAL DIMENSIONS (MM)								TORQUE SENSOR	CAPACITY NM	MOTOR TYPE	TIGHTENING TORQUE NM	FREE SPEED RPM	WEIGHT KG	SPINDLE UNIT	FLANGE DESIGN
	L1	L2	L3	D1	D2	P	A	B								
UNR-F015-45NT	371	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	4.5	3,200	2.48	UEC-F024H	(a)
UNR-F015-65NT	371	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	6.5	2,200	2.48	UEC-F024H	(a)
UNR-F015-200NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	20	730	2.73	UEC-F024H	(a)
UNR-F015-280NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	28	500	2.73	UEC-F024H	(a)
UNR-F015-350NT	400	41	12	40.5	38	51	M6	9.5	TM-035	34.3	F015	35	410	2.73	UEC-F024H	(a)
UNR-F050-270NT	453.5	41	12	50	38	51	M6	9.5	TM-035	34.3	F050	27	1,750	4.86	UEC-F060H	(a)
UNR-F050-630NT	500.5	41	16.5	50	38	62	M8	12.7	TM-085	83.3	F050	63	750	5.08	UEC-F060H	(a)
UNR-F050-730NT	500.5	41	16.5	50	38	62	M8	12.7	TM-085	83.3	F050	73	650	5.08	UEC-F060H	(a)
UNR-F050-880NT	512.5	45	20	50	48	62	M8	15.88	TM-150	147	F050	88	540	5.47	UEC-F060H	(a)
UNR-F050-1400NT	512.5	45	20	50	48	62	M8	15.88	TM-150	147	F050	140	340	5.47	UEC-F060H	(a)
UNR-F100-1300NT	519.5	45	20	62	48	62	M8	15.88	TM-150	147	F100	130	730	7.42	UEC-F120II	(a)
UNR-F100-1900NT	515.5	45	20	62	48	76	M8	15.88	TM-250	245	F100	190	500	7.94	UEC-F120II	(b)
UNR-F100-2500NT	515.5	45	20	62	48	76	M8	15.88	TM-250	245	F100	250	370	7.94	UEC-F120II	(b)
UNR-F100-3700NT	589	57	30	62	58	76	M10	19	TM-400	392	F100	370	260	9.55	UEC-F120II	(b)
UNR-F100-5400NT	704.5	80	40	62	70	90	M10	25.4	TM-700	686	F100	540	175	17.0	UEC-F120II	(b)
UNR-F100-7000NT	704.5	80	40	62	70	90	M11	25.4	TM-700	686	F100	700	120	17.0	UEC-F120II	(b)
UNR-F100-10000NT	704.5	80	40	62	70	90	M11	25.4	TM-1000	980	F100	1,000	90	17.0	UEC-F120II	(b)

FIXTURED F-SERIES NUTRUNNERS



"F" NUTRUNNER MOTORS' MINIMUM PITCH CIRCLE

Refer to minimum pitch circles for designing your machine.

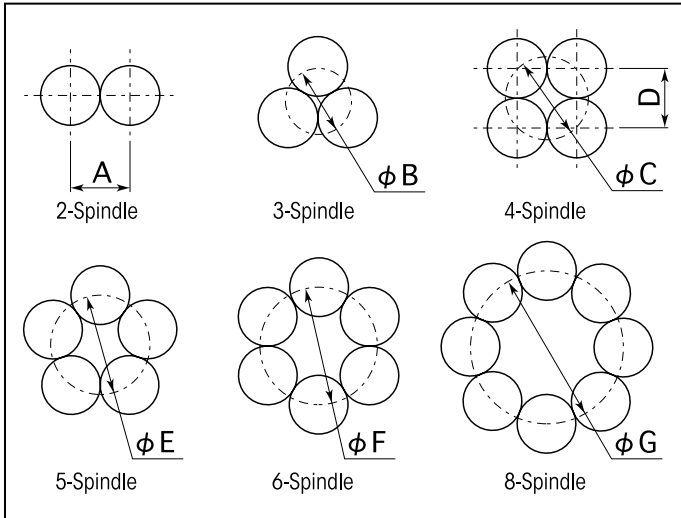

TYPE	DIMENSIONS (MM)						
	A	B	C	D	E	F	G
UNR-F015-45NT	43	52	64	46	74	92	122
UNR-F015-65NT	43	52	64	46	74	92	122
UNR-F015-200NT	43	52	64	46	74	92	122
UNR-F015-280NT	43	52	64	46	74	92	122
UNR-F015-350NT	43	52	64	46	74	92	122
UNR-F050-270NT	59	72	90	64	108	122	160
UNR-F050-630NT	59	72	90	64	108	122	160
UNR-F050-730NT	59	72	90	64	108	122	160
UNR-F050-880NT	59	72	90	64	108	122	160
UNR-F050-1400NT	59	72	90	64	108	122	160
UNR-F100-1300NT	66	75	92	65	116	130	170
UNR-F100-1900NT	70	100	110	78	115	132	174
UNR-F100-2500NT	70	100	110	78	115	132	174
UNR-F100-3700NT	76	100	110	78	120	140	184
UNR-F100-5400NT	94	125	143	102	166	188	257
UNR-F100-7000NT	94	125	143	102	166	188	257
UNR-F100-10000NT	94	125	143	102	166	188	257

RIGHT ANGLE NUTRUNNERS

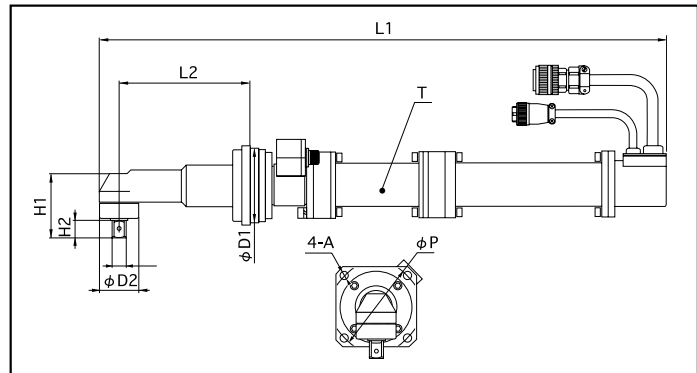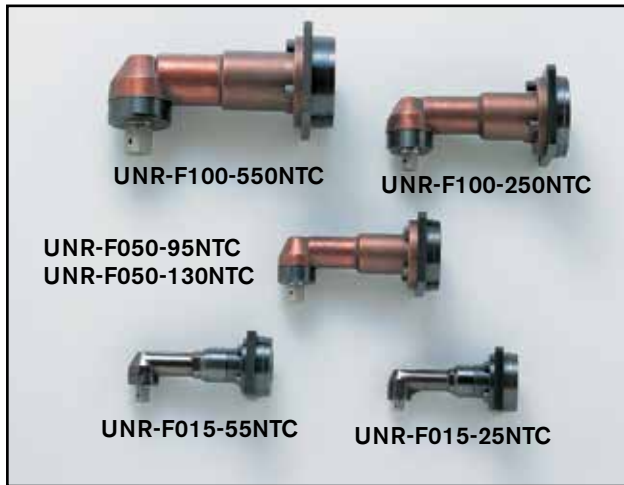

RIGHT ANGLE NUTRUNNER SPECIFICATIONS

MODEL	EXTERNAL DIMENSIONS (MM)									STRAIGHT MOTORS			TIGHTENING TORQUE (NM)	FREE SPEED (RPM)	WEIGHT (KG)	SPINDLE UNIT
	L1	L2	H1	H2	D1	D2	P	A	B	TYPE	SENSOR	MOTOR				
UNR-F015-25NTC	507	120	49	10.6	70	28	85	M6	9.5	UNR-F015-200NT	TM-035	F015	25	460	4.18	UEC-F024
UNR-F015-55NTC	521	130	58	18	70	36	85	M6	12.7	UNR-F015-350NT	TM-035	F015	55	260	4.37	UEC-F024
UNR-F050-95NTC	643	150	73.5	20	85	45	102	M6	15.88	UNR-F050-630NT	TM-085	F050	95	480	8.08	UEC-F060
UNR-F050-130NTC	649	150	73.5	20	85	45	102	M6	15.88	UNR-F050-880NT	TM-150	F050	130	340	8.3	UEC-F060
UNR-F100-200NTC	681.5	170	85.5	20	85	56	102	M6	15.88	UNR-F100-1300NT	TM-150	F100	200	460	11.92	UEC-F120
UNR-F100-250NTC	677.5	170	85.5	20	100	56	120	M8	15.88	UNR-F100-1900NT	TTM-150	F100	250	340	12.3	UEC-F120
UNR-F100-380NTC	716.5	200	109.5	25	110	74	134	M10	19	UNR-F100-2500NT	TM-250	F100	380	235	15.92	UEC-F120
UNR-F100-550NTC	784	200	114.5	29	110	74	134	M10	25.4	UNR-F100-3700NT	TM-400	F100	550	165	17.43	UEC-F120

TORQUE MEASUREMENT: OVERVIEW

Torque measurement and the verification of torque tools and applied torque are an integral part of today's threaded assembly process. The method used to measure torque can affect the judgments made regarding tool performance, assembly processes and overall product quality.

DYNAMIC TORQUE

Dynamic torque is the torque produced during the actual tightening process, normally measured using rotary transducers and a torque analyzer.

Advantages:


- Reduces operator influence
- Measures applied torque
- Can also include angle of rotation as error proofing parameter

RESIDUAL TORQUE

Residual torque is the torque measured by producing an incremental amount of movement of the fastener after the actual tightening process, normally measured using a dial or digital torque wrench.


Advantages:

- Easy access to fastener
- Error proofing
- Can detect missed fasteners or joints with significant relaxation

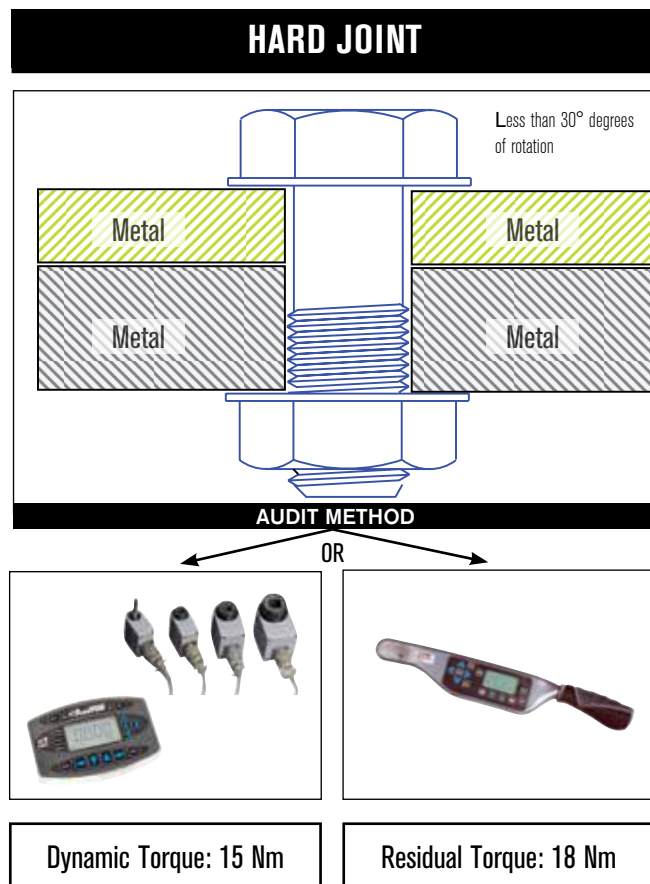

Values as examples only

A hard joint, one requiring a low degree of rotation during tightening, will normally show very little relaxation after tightening. Due to the high amount of remaining clamp load and friction within the joint members, additional movement of the fastener requires additional torque energy to be applied. Therefore, Residual Torque values will be higher than Dynamic Torque values.

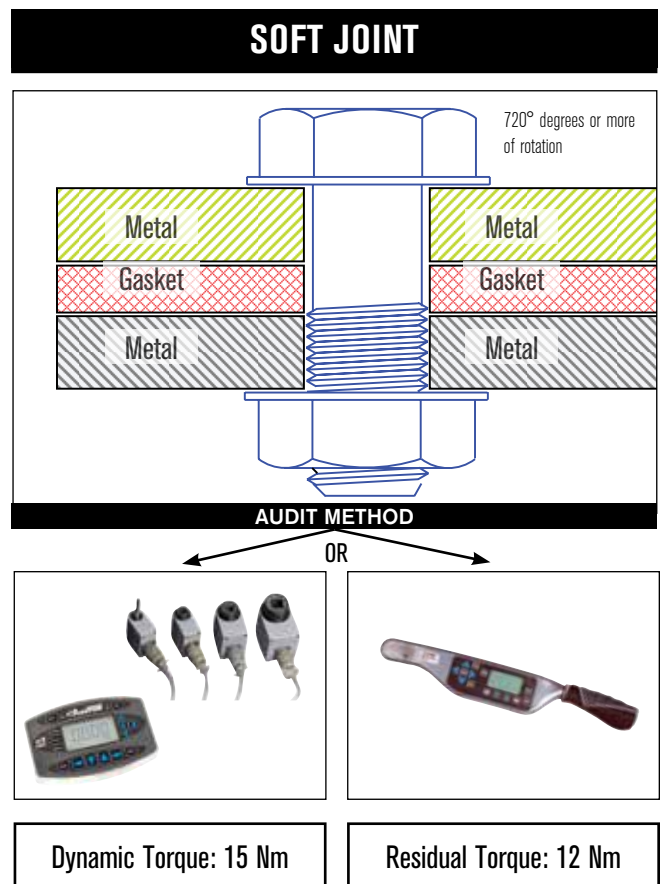

Values as examples only

A soft joint, one requiring a high degree of rotation during tightening, will normally show significant amounts of relaxation after tightening. Relaxation leads to a loss of clamp load and friction within the joint members. Due to this relaxation, additional movement of the fastener requires relatively small amounts of additional torque energy and Residual Torque values will be lower than Dynamic Torque values.

TORQUE MEASUREMENT: OVERVIEW

Checking torque measurement before, during, and after assembly ensures quality manufacturing. Proper torque measurement is critical in many assembly operations. AIMCO utilizes years of experience to design a process around your specific auditing requirements. From simple dial wrenches to electronic data collectors and joint analyzers for R&D, AIMCO is with you every step of the way.

BEFORE ASSEMBLY

Tool Capability



Is the tool working correctly?

Testing and verifying tools under controlled conditions helps you identify accuracy and repeatability before using them in production.

Equipment used:

- Desktop testers with internal transducers
- Auditor analyzers with either stationary or rotary transducers
- UFT hydraulic joint simulators and rotary transducers

DURING ASSEMBLY

Process Capability



How does the tool work with the product being assembled?

Testing the tools during the actual process helps ensure that the process is working correctly. Variables in the parts and influences from the operator can be accounted for.

Equipment used:

- Torque Data Collectors/ Analyzers
- Auditor Rotary Transducers

AFTER ASSEMBLY

Product Capability



Does the finished product meet expectations?

Checking the product after assembly is the final opportunity to verify that product quality is satisfactory before user delivery

Equipment used:

- Click/Dial wrenches
- Electronic wrenches with Auditor analyzers
- Rotary transducers and Auditor analyzers with hand driver to move fastener

AUDITOR™

TORQUE MEASUREMENT: OVERVIEW

MEASURING QUALITY – PROCESS CAPABILITY


STATISTICAL ANALYSIS IS AN IMPORTANT STEP IN ANY QUALITY CONTROL PROCESS.

One of the most widely accepted statistical indicators of process quality, and therefore product quality, is Cpk, or the process capability for a centered process. This value indicates how capable a process is and whether the results of that process are properly centered near a specific target. A capable process is one that approaches, as a limit, 100% conformance to specifications.

Cpk is a statistical value that indicates how tightly grouped a series of samples is around the target value. Cpk is a function of the Upper Specification Limit (USL), the Lower Specification Limit (LSL), the mean of the samples and the standard deviation (σ) of the samples.


$$Cpk = \text{either } \frac{(USL - \text{Mean})}{(3 \times \sigma)} \text{ or } \frac{(\text{Mean} - LSL)}{(3 \times \sigma)}, \text{ whichever is smaller.}$$

An acceptable, or capable, process will normally have a Cpk value of at least 1.33.

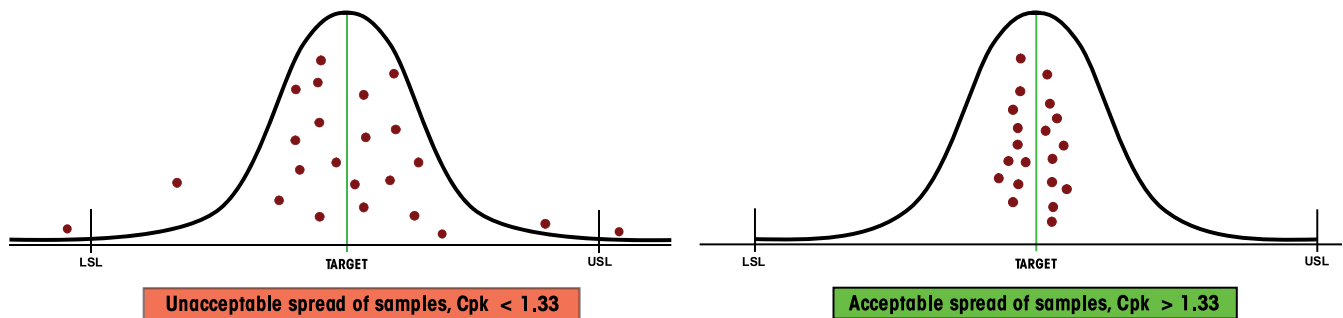



MEASURING QUALITY – CLAMP LOAD

THE PURPOSE OF THREADED FASTENING IS TO PRODUCE THE CORRECT AMOUNT OF CLAMP LOAD WITHIN THE JOINT.

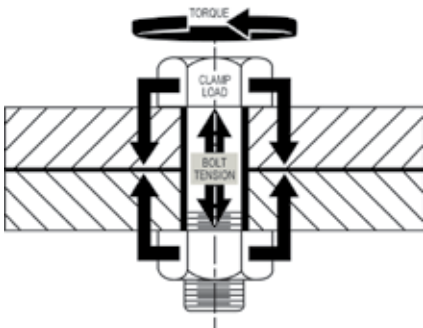

Due to the cost and difficulty of measuring clamp load during the actual assembly process, torque is used as the control parameter during tightening. Many manufacturers use torque values as the primary indicator of threaded assembly quality. However, achieving repeatable clamp load is a better indicator of joint quality.

Studies have shown that discontinuous drive tools can produce equal or better clamp load results when compared to continuous drive tools.

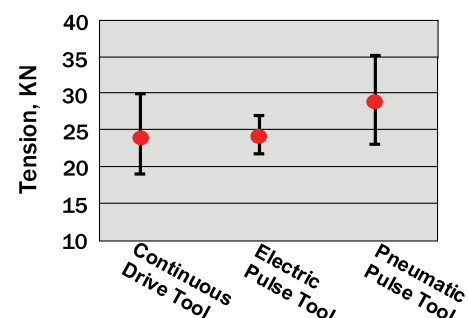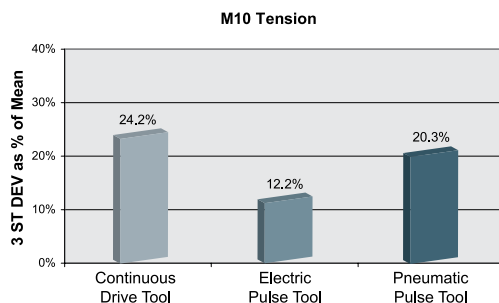

TORQUE MEASUREMENT SYSTEMS



TORQUE MEASUREMENT SYSTEMS

DEVICES	MODEL SERIES	DATA COLLECTOR	INTEGRATED TRANSDUCER	TORQUE WRENCH	TORQUE WRENCH LOADER	EXTERNAL TRANSDUCER PORT	STATIONARY TRANSDUCERS -SMART	STATIONARY TRANSDUCERS -IND STD	ROTARY TRANSDUCER -SMART	ROTARY TRANSDUCER - IND STD
Testers	ATC		X							
	AUET		X							
	AUET-DC	X	X							
	AUET/MTM		X			X				
	AUET/MTM-DC	X	X			X				
Analyzers	ATDA					X				
	ATDA-DC	X				X				
	ATDA-8000-10-DCA(-TA)(-TP)	X				X				
Test Stands	AHCTS*	X*	X*	X*			X*	X*	X*	X*
	AHCTS-K*	X*	X*	X*			X*	X*	X*	X*
	AHDTs*	X*	X*	X*			X*	X*	X*	X*
	AHBTS*	X*	X*	X*			X*	X*	X*	X*
	AIMTS*	X*	X*	X*			X*	X*	X*	X*
Wrenches	ADW			X						
	ADW-DC	X								
	APTW			X						
	ATW			X						
	ATWL				X					
	Moment Alpha	X		X						
Torque Cart	iTVC*	X*	X*	X*			X*	X*	X*	X*
Transducers	ARTIS									X
	ASTIS							X		
	AISI						X			
	AISF						X			
Rundown Fixtures	AJKR									
	AJKS									
	ARDFA									
	ARDIA									
Joint Simulator	UFT									

* configured to customer specifications

TORQUE MEASUREMENT TESTERS

TORQUE MEASUREMENT: TESTERS

Features and Benefits

- Heavy industrial design
- All software included
- Auditor Torque Testers are designed for intuitive and functional usability. AUET/MTM models are available with our unique dual integrated torque transducer package.

Testers are designed to audit torque wrenches and power tools, including pulse tools

					
	ATC	AUET	AUET/MTM	AUET-DC	AUET/MTM-DC
	Auditor Torque Cube	Auditor Universal Electronic Tester	Auditor Universal Electronic Tester - Multiple Transducer Module	Auditor Universal Electronic Tester - Data Collector	Auditor Universal Electronic Tester/Multiple transducer Module - Data Collector
	Compact vertical or horizontal bench-mount tester.	Bench mount or line side tester utilizing integrated transducer.	Bench mount or line side tester with dual integrated transducer and external transducer capacity.	Bench mount or line side tester utilizing integrated transducer. Provides data collection capability with included software to interface with PC.	Bench mount or line side tester with dual integrated transducer and external transducer capacity. Data collection capability with included software to interface with PC.
Integrated Transducer Range (values are in full scale)	1 - 1,350 Nm 100 in-oz - 1,000 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb	1 - 1,000 Nm 100 in-oz - 750 ft-lb
External Transducer Capacity (Transducer sizes exceeding this range may be special ordered)			up to 5,000 ft-lb		up to 5,000 ft-lb
Vertical / Horizontal Mount	X				
Bi-directional accuracy of +/- X of indicated reading within the top 90% of the tester's capacity	1%	0.50%	0.50%	0.50%	0.50%
Data Output to PC	X	X	X	X	X
Integrated Torque Transducer	1	1	2	1	2
External Transducer Port			X		X
Number of Stored Readings	999	999	999	999	999
Adjustable Rundown Fixture Included *	1	1	2	1	2
Rechargeable NiMH Battery	X	X	X	X	X
Measurement Modes					
Peak	X	X	X	X	X
First Peak (Click)	X	X	X	X	X
Pulse	X	X	X	X	X
Track	X	X	X	X	X
Units of Measure Options	8	8	8	8	8
Tool Manager Software Included				X	X

* Included with all testers and analyzers with a range up to 1000 in-lb.

TORQUE MEASUREMENT TESTERS USED IN CONJUNCTION WITH

External Transducers

ASTIS - Stationary			X		X
AISI / AISF - Stationary - Analog			X		X
ARTIS - Rotary			X		X

Switch box for External Transducer

AISWT-4L > 4 Way Intellect box			X		X
AISWT-6L > 6 Way Intellect box			X		X

Cables

ICBL-USB - USB Serial > PC	X	X	X	X	X
ATDBLIS - IS Transducer w/angle (10 Pin)			X		X
ATDBRIS - IS Transducer (4 Pin)			X		X
ICBL-10P - Intellect transducer cable Identification chip in cable - 10 pin connector			X		X
ICBL-4P - Intellect transducer cable. Identification chip in cable - 4 pin connector			X		X
ICBL-5000L - Connect from AUET/MTM & ATDA to Intellect Transducers, Analog AISI / AISF			X		X

AUDITOR TORQUE CUBE



ATC-10
ATC-25
ATC-100
ATC-250
ATC-500
ATC-750
ATC-1800



ATC-150F
ATC-250F
ATC-500F
ATC-750F



AUDITOR TORQUE CUBE

The Auditor Torque Cube (ATC) is a compact, versatile desktop tester that provides a multitude of capabilities. The ATC is designed to test hand or power tools with the following:

- Peak, first peak, and track modes
- Multiple engineering units
- Manual and auto clear function
- Multiple frequency response settings
- Bi-directional use and accuracy
- Accuracy is better than 1% of indicated reading top 90% of range
- Serial data output
- Memory: 999 data samples
- Battery and/or mains powered

Because precision and quality are critical, you can depend on our testers to calibrate and certify your tools. Whether you are assembling large complicated systems or small precise time pieces, AIMCO provides the best system for your application. Our instruments have been judged "best in class" by independent National Standards laboratories. Auditor Torque Cube is rugged enough to test and verify tools at "point of use" while still being accurate enough to calibrate hand and power tools.

Each tester is shipped with a mains/battery charger power cord, a hex to allen drive bit, and a bolting template. Models with max torque of 1,000 in-lb or less also include a joint rundown fixture. The ATC can be positioned vertically or horizontally for the ergonomic testing of inline or pistol grip tools.

MODEL	RECOMMENDED TORQUE RANGE		WEIGHT	W X H X D	SQUARE DRIVE
	NM	IN-LB/FT-LB			
			KG	MM	IN
			LB	IN	
Vertical Configuration					
ATC-10	0.13 - 1.13	1 - 10 in-lb	1.13	79 x 95 x 83	1/4
ATC-25	0.28 - 2.83	2.5 - 25 in-lb	1.13	79 x 95 x 83	1/4
ATC-100	1.13 - 11.3	10 - 100 in-lb	1.13	79 x 95 x 83	1/4
ATC-250	2.83 - 28.3	25 - 250 in-lb	1.13	79 x 95 x 83	3/8
ATC-500	5.65 - 56.5	50 - 500 in-lb	1.13	79 x 95 x 83	3/8
ATC-750	8.47 - 84.8	75 - 750 in-lb	1.13	79 x 95 x 83	3/8
ATC-1800	21.2 - 203	188 - 1,800 in-lb	1.13	79 x 95 x 83	1/2
Horizontal Configuration					
ATC-150F	20 - 200	15 - 150 ft-lb	2.25	79 x 95 x 83	1/2
ATC-250F	34 - 340	25 - 250 ft-lb	2.25	79 x 95 x 83	1/2
ATC-500F	68 - 678	50 - 500 ft-lb	2.25	79 x 95 x 83	3/4
ATC-750F	102 - 1,017	75 - 750 ft-lb	2.25	79 x 95 x 83	3/4

AUDITOR BENCH-MOUNT TESTERS



AUET



AUET/MTM



AUET/MTM-DC

AUDITOR UNIVERSAL ELECTRONIC TESTERS

Auditor Universal Electronic Testers (AUET) have a broad range of features to accommodate most requirements. They are designed to be bench-top mounted and are available in several configurations and various single or multiple torque ranges. Onboard memory allows you to capture 999 torque event readings. The testers are also available in file capability (DC) models that require PC software Auditor Tool Manager (ATM).

Instruments up to 1,000 in-lb are supplied with rundown adapters/joint kits. Rundown kits for larger instruments can be ordered separately. AUET/MTM units are supplied with an external transducer port and selector switch for connecting additional transducers.

AUET testers utilize the same transducers as the ATC instruments, providing the same high quality accuracy and durability. The common interface makes the Auditor tester extremely user friendly.



SINGLE TRANSDUCER MODELS

MODEL*	RECOMMENDED TORQUE RANGE	
	KGf-CM/NM	IN-OZ/IN-LB
AUET-050(-DC)	0.4 - 3.6 kgf-cm	5 - 50 in-oz
AUET-0100(-DC)	0.7 - 7.2 kgf-cm	10 - 100 in-oz
AUET-10(-DC)	1.1 - 11.5 kgf-cm	1 - 10 in-lb
AUET-50(-DC)	0.5 - 5.6 Nm	5 - 50 in-lb
AUET-100(-DC)	1.1 - 11.3 Nm	10 - 100 in-lb
AUET-250(-DC)	2.8 - 28.3 Nm	25 - 250 in-lb
AUET-500(-DC)	5.7 - 56.5 Nm	50 - 500 in-lb
AUET-1000(-DC)	11.3 - 113 Nm	100 - 1,000 in-lb
AUET-1200(-DC)	13.6 - 135.6 Nm	120 - 1,200 in-lb
AUET-1800(-DC)	20.3 - 203.4 Nm	180 - 1,800 in-lb

* Add "-DC" to part numbers for data collecting models.

Data collecting models allow multiple files/tools/applications to be associated with torque data. Requires Tool Manager software.

Custom sizes are also available. Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

DUAL TRANSDUCER MODELS

MODEL**	RECOMMENDED TORQUE RANGE			
	TRANSDUCER 1	TRANSDUCER 2	TRANSDUCER 1	TRANSDUCER 2
AUET/MTM-050-25	0.04 - 0.4 Nm	0.3 - 2.8 Nm	5 - 50 in-oz	2.5 - 25 in-lb
AUET/MTM-050-600(-DC)	0.04 - 0.4 Nm	6.8 - 67.8 Nm	5 - 50 in-oz	60 - 600 in-lb
AUET/MTM-0100-050(-DC)	0.07 - 0.71 Nm	0.04 - 0.4 Nm	10 - 100 in-oz	5 - 50 in-oz
AUET/MTM-10-100(-DC)	0.11 - 1.12 Nm	1.3 - 11.3 Nm	1.0 - 10 in-lb	10 - 100 in-lb
AUET/MTM-50-250(-DC)	0.56 - 5.65 Nm	2.8 - 28.3 Nm	5.0 - 50 in-lb	25 - 250 in-lb
AUET/MTM-50-500(-DC)	0.56 - 5.65 Nm	5.7 - 56.5 Nm	5.0 - 50 in-lb	50 - 500 in-lb
AUET/MTM-50-1000(-DC)	0.56 - 5.65 Nm	11.3 - 113 Nm	5.0 - 50 in-lb	100 - 1,000 in-lb
AUET/MTM-100-500(-DC)	1.13 - 11.3 Nm	5.7 - 56.5 Nm	10 - 100 in-lb	50 - 500 in-lb
AUET/MTM-100-1000(-DC)	1.13 - 11.3 Nm	11.3 - 113 Nm	10 - 100 in-lb	100 - 1,000 in-lb
AUET/MTM-100-1200(-DC)	1.13 - 11.3 Nm	13.6 - 135.6 Nm	10 - 100 in-lb	120 - 1,200 in-lb
AUET/MTM-100-1600(-DC)	1.13 - 11.3 Nm	18.1 - 180.8 Nm	10 - 100 in-lb	160 - 1,600 in-lb
AUET/MTM-100-2000(-DC)	1.13 - 11.3 Nm	22.6 - 226 Nm	10 - 100 in-lb	200 - 2,000 in-lb
AUET/MTM-250-1600(-DC)	2.82 - 28.2 Nm	18.1 - 180.8 Nm	25 - 250 in-lb	160 - 1,600 in-lb
AUET/MTM-250-1800(-DC)	2.82 - 28.2 Nm	20.3 - 203.4 Nm	25 - 250 in-lb	180 - 1,800 in-lb
AUET/MTM-250-2500(-DC)	2.82 - 28.2 Nm	28.2 - 282.5 Nm	25 - 250 in-lb	250 - 2,500 in-lb
AUET/MTM-500-2500(-DC)	5.7 - 56.5 Nm	28.2 - 282.5 Nm	50 - 500 in-lb	250 - 2,500 in-lb

Custom sizes are also available. Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR TORQUE MEASUREMENT ANALYZERS

TORQUE MEASUREMENT: ANALYZERS

Features and Benefits

- Auditor Torque Analyzers share similar features across all products and are designed for intuitive and functional usability.
- Connects to AIMCO's line of rotary and stationary transducers



	ATDA	ATDA-DC	ATDA-8000	ATDA-8000-10-DCA(-TA)(-TP)
	Auditor Torque Data Analyzer	Auditor Torque Data Analyzer with Data Collection	Auditor Torque Data Analyzer with 7" screen	Auditor Torque Data Analyzer 10" display with Data Collection. TA = Torque & Angle, TP = Torque & Pressure
	Portable analyzer to be connected to various transducers	Portable analyzer to be connected to various transducers. Provides data collection capability with included software to interface with PC	7" screen with high resolution display and intuitive user interface	10" touch screen with high resolution display and intuitive user interface with multiplexer
Bi-directional	X	X	X	X
Data Output to PC	X	X	X	X
External Transducer Port	1	1	1	4
Number of stored readings	999	999	999	999
Rechargeable NiMH Battery	X	X	X	X
Digital I/O for external devices	X	X	X	X
Measurement Modes	X	X	X	X
Peak	X	X	X	X
First Peak (Click)	X	X	X	X
Pulse	X	X	X	X
Track	X	X	X	X
Measurement Units	8	8	8	8
Software Included		X	X	X
Barcode Reader Capable			X	X

USED IN CONJUNCTION WITH

Transducers				
AISI / AISF - Analog	X	X		
AISI / AISF - Digital			X	X
ASTIS - Stationary	X	X		
ARTIS - Rotary	X	X		
Wrenches				
ATW	X	X		
Switch boxes for External Transducers				
AISWT-4L > 4 Way Intellect box	X	X		
AISWT-6L > 6 Way Intellect box	X	X		
Cables				
ICBL-USB - USB Serial > PC	X	X		
ATDBLIS - IS Transducer w/ angle (10 Pin)	X	X		
ATDBRIS - IS Transducer (4 Pin)	X	X		
ICBL-10P - Intellect transducer cable. Identification chip in cable 10 pin connector	X	X		
ICBL-4P - Intellect transducer cable. Identification chip in cable 4 pin connector	X	X		
ICBL-5000L - Connect from AUET/ MTM & ATDA to Intellect Transducer, Analog AISI / AISF	X	X		
ICBL-8000DIG - Connect from ATDA-8000 series analyzer to Digital AISI / AIFI transducer			X	X

AUDITOR TORQUE DATA ANALYZERS



ATDA-DC

AUDITOR TORQUE DATA ANALYZERS

The Auditor Torque Data Analyzer (ATDA) DC is designed to be portable or conveniently placed on a bench. The tester can be connected to various transducers, as well as transducerized wrenches and rotary or stationary transducers. The user interface is common between the ATC (Cube), AUET, AUET-DC, AUET/MTM, AUET/MTM-DC, ATDA, and ATDA-DC. All of these instruments have similar menus. Additionally, all data collector testers utilize Auditor Tool Manager for tool testing and data management.

The Auditor Torque Data Analyzer is available in two configurations:

- ATDA: A simple torque analyzer with sequential memory, 999 data samples, engineering limits, limited statistical processing average, range, Cp and CpK with serial output
- ATDA-DC: Contains all of the features of the ATDA and has additional file capability. It can associate data with file names and manage data collection with a computer and Auditor Tool Manager software

This is a great “starter” tool management system. It provides testing, archiving, and analysis of tools at single or multiple torque targets. The tool and torque data is stored in a SQL database and can be exported to Excel or any .csv spreadsheet.

MODEL	DESCRIPTION
ATDA	Auditor Torque Data Analyzer
ATDA-DC	Auditor Torque Data Collector

AUDITOR™

AUDITOR TORQUE DATA ANALYZERS



TOUCH SCREEN AUDITOR TORQUE DATA ANALYZERS

Auditor offers the ATDA-8000 and the ATDA-8000-10-DCA(-TA)(-TP). The ATDA-8000 is a touch screen instrument with a high resolution display and user interface that facilitates “point of use” tool validation. The user interface is intuitive and the display provides clear easy to read data. Features and parameter settings are password protected to ensure parameters cannot be inadvertently changed. After initial setup, the instrument provides semi-automatic tool validation and judgment.

The ATDA-8000 is a single channel instrument. The ATDA-8000-10-DCA(-TA)(-TP) is a larger instrument that includes a multiplexor for connection to multiple transducers allowing a wide range of tools to be tested with one instrument. The (-TA) model is designed for torque and angle analysis and the (-TP) model is designed for torque and pressure analysis.


Both the ADTA-8000 and the ATDA-8000-10-DCA(-TA)(-TP) systems work with AIMCO's line of digital transducers.

MODEL	DESCRIPTION
ATDA-8000	Auditor Torque Analyzer Single channel 7" touch screen point of use validation system
ATDA-8000-10-DCA(-TA)(-TP)	Auditor Torque Analyzer Multiple transducer 10" touch screen point of use validation system

AUDITOR™


AUDITOR DATA COLLECTION SOFTWARE

DATA COLLECTION SOFTWARE

			
AUDITOR TOOL MANAGER SOFTWARE	AUDITOR AUDIT MANAGER SOFTWARE	SMD TOOLS SOFTWARE	DATA PRO + SQNET SOFTWARE
Test, verify, and archive tools	Comprehensive statistical analysis, data archiving, and data export	Use a PC as a torque tester/display for testers and transducers	Tool management, verification, and calibration for AIMCO torque cart line
Create a database of tools and store test results with easy-to-use software integrator to/from tester to PC	Facilitate residual auditing with digital wrenches and transducerized wrenches	Comprehensive, pre-configured, and guided testing of specific tools as well as manual testing with all testing parameters adjustable and set by the user	Manage complete tool inventory, create jobs/routes, and store collected data (see page 87 for more information)

COMPATIBILITY

Desktop or PC			X	
ATC				
ATDA			X	
ATDA-DC	X	X		
AUET			X	
AUET-DC	X	X		
AUET/MTM			X	
AUET/MTM-DC	X	X		
ARTIS				
ARTIS-DIG			X	
AISI/AISF			X	
AISI/AISF (Digital)			X	
iTVC Torque Cart			X	X

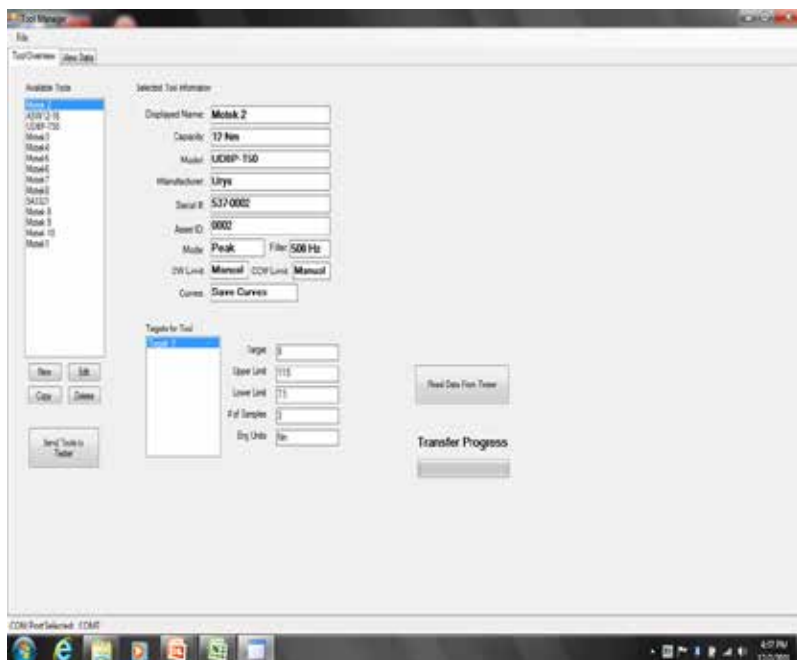

AUDITOR TOOL MANAGER SOFTWARE

Tool Manager Software is included with the purchase of AUET-DC and AUET/MTM-DC data-collecting torque testers, as well as the ADW-DC data-collecting torque wrench. Create a database of tools and store test results with this easy-to-use software integrator to/from tester to PC.

Tool Manager Software, Tool Overview Screen

AUDITOR DATA COLLECTION SOFTWARE

AUDITOR AUDIT MANAGER SOFTWARE

Audit Manager Software is included with the purchase of ATDA-DC data collecting torque analyzers. The View Data tab allows you to look at the collected data and the trace file. This data can be exported to Excel as a .csv file and displayed by Excel charts. The trace file displays the data in a torque/time graph and allows the user to supersede the move-on reading selected by the wrench by visually discerning via the trace where the fastener started to rotate. When selecting a single job the average, range, sigma, Cp, and CpK values are listed.

**Audit Manager Software,
Job and Route Builder
Screen**

The screenshot shows the 'Audit Manager' software interface. The 'Job Info' tab is active, displaying a list of available jobs on the left and a form for job details on the right. The 'Route Info' tab is also visible, showing a list of available routes and a form for route details. The forms include fields for 'Fastener/Application Name', 'Unit #', 'Process #', '# of Samples', 'Adapters', 'Target', 'Upper Limit', and 'Lower Limit'. Buttons for 'New', 'Edit', 'Copy', and 'Delete' are located at the bottom of each section. At the bottom right, there are buttons for 'Send Selected Route to Wrench' and 'Read Data From Wrench'.

SMD TOOLS SOFTWARE

A digital signal between a PC and a digital transducer allows SMD Tools software to operate independently of a tester or analyzer to collect and store data in Microsoft Excel.

Tool Manager and Test Manager databases within the software stores tool details and test processes for easy access in the Cert Manager platform

Auditor branded analyzers and testers can network with this software to produce and store real-time data

The screenshot shows the 'SMD Tools Software' interface. The 'Cal Cert' screen is active, displaying two large digital readouts for 'Channel 1 Reading' and 'Channel 2 Reading', both showing '0.000'. Below the readouts are buttons for 'Capture', 'Download', 'Print', and 'Exit'. The bottom section of the screen shows a grid of data tables for 'Channel 1 Readings', 'Channel 2 Readings', 'Unit #', 'Target', and 'High'. The interface is designed for real-time data collection and certification.

SMD Tools Software, Cal Cert Screen

AUDITOR HIGH-CAPACITY TEST STANDS

TORQUE MEASUREMENT: HIGH CAPACITY TEST STANDS

Features and Benefits

- Advanced test stations for larger tools and higher torque output
- Configured to meet application requirements
- Durable industrial grade devices

				
AHCTS	AHCTS-K	AHDTS	AHBTS	AIMTS
Auditor High Capacity Test Stand	Auditor High Capacity Test Stand - Hydraulic	Auditor High Capacity Test Stand Dual Transducer	Auditor High Capacity Stand w/variable joint simulation	Auditor High Capacity Impact Test Stand
Designed for testing tools with continuous rotating output spindles and pulse tools.	Specifically designed for hydraulic wrenches testing.	Two transducers, one for rotary tools and one for hydraulic tools. Includes rundown & reaction fixtures with a single display.	Designed for testing rotating tools without the use of rundown fixtures. Adjustable airbrake joint simulation eliminates CCW rotation after rundown.	Ideal for testing impact wrenches and is recommended to utilize rundown fixtures when testing impacts.
6,750 Nm	33,750 Nm	33,750 Nm	6,750 Nm	2,700 Nm

ACCESSORIES

Rundown fixtures					
AHCTS-3/4RDF	X		X		
AHCTS-1RDF	X		X		
AHCTS-1.5RDF	X		X		

ADAPTERS

			AHCTS	AHCTS-K	AHDTS	AHBTS	AIMTS
Square to Square Drive Adapters*							
	CA1510	1-1/2" Male to 1" Female	X		X	X	
	CA1550	1-1/2" Male to 1/2" Female	X		X	X	
	CA1575	-1/2" Male to 3/4" Female	X		X	X	
Insert Adapters*							
	CA2510I	2-1/2" Male to 1" Female	X		X	X	
	CA2515I	2-1/2" Male to 1-1/2" Female	X		X	X	
	CA2575I	2-1/2" Male to 3/4" Female	X		X	X	
Square to Hex Drive Adapters*							
	CA150108DHD	1-1/2" Male to 1-1/2" Male Hex		X			

* Partial list. Contact an AIMCO Customer Service Associate for more options, 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR HIGH-CAPACITY TEST STANDS



AHCTS-5000

AHCTS TEST STAND FOR ROTATING TOOLS

Designed for testing tools with continuous rotating output spindles. The test stand includes a rundown fixture, bushing for side load support, reaction post or reaction paddles, transducer and torque analyzer display.

MODEL	DESCRIPTION
AHCTS-0500	3/4" Square Drive w/rundown fixture
AHCTS-2500	1.5" Square Drive w/rundown fixture
AHCTS-5000	1.5" Square Drive w/rundown fixture
AHCTS-7500	1.5" Square Drive w/rundown fixture

Please refer to Configuration Options on following page for required ordering options.




AHCTS-001K

AHCTS-K STAND FOR HYDRAULIC TOOLS

The AHCTS-K stands are specifically designed for hydraulic wrench testing. Hydraulic wrenches have very low profiles but very high torque output, therefore, working height must be minimized to prevent side loading which could lead to errors in data or damage to tool or reaction devices.

Either stand can be ordered with options such as extension legs, casters, embedded or attached torque analyzers with various rundown fixtures and reaction devices. Contact an AIMCO Customer Service Associate for additional information, 1-503-254-6600, or toll free 1-800-852-1368.

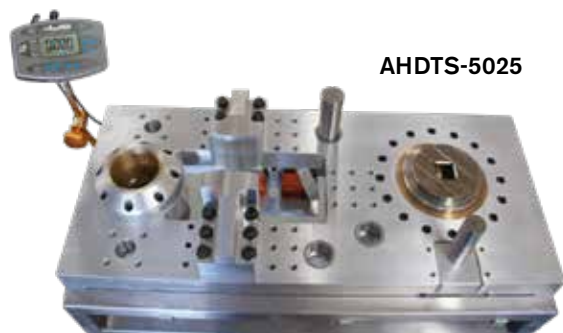

AHDTS-5025

AHDTS DUAL TEST STAND FOR ROTATING AND HYDRAULIC TOOLS

This stand has two transducers embedded into the base, one for rotary tools and one for hydraulic tools. It comes with rundown and reaction fixtures and one display.

MODEL	DESCRIPTION
AHDTS-5025	1.5" Sq Dr dual station w/rundown fixture and reaction devices

Contact an AIMCO Customer Service Associate for ordering options, 1-503-254-6600, or toll free 1-800-852-1368.

MODEL	DESCRIPTION	CAPACITY Ft-Lb
AHCTS-0.5K	3/4" Square Drive w/reaction device	500
AHCTS-001K	1" Square Drive w/reaction device	1,000
AHCTS-2.5K	1.5" Square Drive w/reaction device	2,500
AHCTS-005K	1.5" Square Drive w/reaction device	5,000
AHCTS-010K	1.5" Square Drive w/reaction device	10,000
AHCTS-025K	2" Square Drive w/reaction device	25,000

Please refer to Configuration Options on following page for required ordering options.

**Optional Pelican Case shown
(ordered separately)**



25503

AUDITOR HIGH-CAPACITY TEST STANDS

AHCTS Series High Capacity Test Stands for Rotary and Hydraulic Tools Configuration Options

Base Model Number	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)	Reaction Post	Casters	Articulated Arm and Mount	Digital Module
AHCTS-xxxx	1 = ATDA 2 = No Embedded Display 3 = ATDA-DC 4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital 6 = Standard Embedded Display (1, 3, 4, 5 include articulated arm)	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	0 = 8 x 8" 1 = 12 x 12" 3 = 14 x 19" (Standard) 4 = 18 x 24" 5 = 18 x 36" 6 = NA	1 = 500 2 = No 3 = 1,000 4 = 2,500 5 = 5,000 6 = 7,500 7 = 1.5" Kit Max. capacity 7,500 Ft-Lb 8 = 2.5" Kit Max. capacity 7,500 Ft-Lb	1 = Single 6" Post and Paddles 2 = No 3 = Multiple Posts 6" 4 = Paddles 5 = Custom 6 = Single 9" Post and Paddles 7 = Multiple Posts 9"	1 = Yes 2 = No	1 = Yes 2 = No	1 = Yes (for Tablet or PC direct) 2 = No
Model Number Digits 1-10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digit 15	Model # Digit 16	Model # Digit 17	Model # Digit 18

Auditor High Capacity Test Stand for Rotary Tools

AHCTS-0500 680 Nm / 500 ft-lb			0, 1, or 3					
AHCTS-1000 1,360 Nm / 1,000 ft-lb			0, 1, or 3					
AHCTS-2500 3,400 Nm / 2,500 ft-lb			0, 1, or 3					
AHCTS-5000 6,800 Nm / 5,000 ft-lb			0, 1, or 3					
AHCTS-7500 10,200 Nm / 7,500 ft-lb			0, 1, or 3					

Auditor High Capacity Test Stand for Hydraulic Tools

AHCTS-0.5K 680 Nm / 500 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-001K 1,360 Nm / 1,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-2.5K 3,390 Nm / 2,500 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-005K 6,800 Nm / 5,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-010K 13,600 Nm / 10,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-025K 34,000 Nm / 25,000 ft-lb			0-5 (3-5 come with casters)	2				
AHCTS-050K 68,000 Nm / 50,000 ft-lb			0-5 (3-5 come with casters)	2				

AUDITOR HIGH-CAPACITY TEST STANDS

AIMTS TEST STAND FOR IMPACT TOOLS

Obtain accurate test results with the AIMTS Series Impact Test Stand. When used with an Auditor ATDA Analyzer or AUET/MTM Desktop Torque Tester, the tool's performance data can be recorded and stored. Each Auditor Analyzer comes standard with PC-based software to store and organize data for use within a quality system. It is necessary to bolt the AIMTS to a bench. We also recommend that a rundown fixture always be used for testing impacts.



AIMTS-0500
Test stand for
small impact tools



AIMTS-2000
Test stand for large impact tools

MODEL	DESCRIPTION
AIMTS-0500	3/4" square drive impact test stand
AIMTS-2000	1.5" square drive impact test stand

Refer to Configuration Options below for required ordering options.

AIMTS Series High Capacity Impact Test Stand Configuration Options

Base Model #	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)*		Options	Digital Module
AIMTS-xxxx	1 = ATDA 2 = No Embedded Display 3 = ATDA-DC 4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	6 = Bench Stand	1 = 500 2 = No 3 = 2,000 4 = 50 5 = 5,000	6 = 10,000 7 = 20,000 8 = 250 9 = 2,500	Not available for AIMTS test stands. Enter 222 for model # digits 15-17	1 = Yes (for Tablet or PC direct) 2 = No
Model Number Digits 1-10	Model Number Digit 11	Model Number Digit 12	Model Number Digit 13	Model Number Digit 14		Model Number Digits 15-17	Model Number Digit 18
AIMTS-0050 68 Nm / 50 ft-lb		2	6			222	
AIMTS-0250 340 Nm / 250 ft-lb		2	6			222	
AIMTS-0500 680 Nm / 500 ft-lb		2	6			222	
AIMTS-2000 2,720 Nm / 2,000 ft-lb		2	6			222	
AIMTS-2500 3,390 Nm / 2,500 ft-lb		2	6			222	
AIMTS-5000 6,780 Nm / 5,000 ft-lb		2	6			222	

* Ordering more than one rundown fixture is highly recommended if you're doing a lot of testing. Having multiple rundown fixtures ensures that you have spares when dealing with heat issues. AIMTS test stands are available in capacities of up to 20,000 ft-lb. Capacities other than what is shown here are quoted separately. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR HIGH-CAPACITY TEST STANDS



AHBTS-2500

Auto Release test stand for quickly testing large rotating tools

AHBTS TEST STAND WITH BRAKING SYSTEM FOR ROTATING TOOLS

These test stands are for testing rotating tools without requiring the use of rundown fixtures. We utilize an airbrake for testing tools that cannot or should not be used in reverse. These test stands are compatible with any Auditor Torque Analyzer.

MODEL	DESCRIPTION
AHBTS-2500	1.5" square drive, brake system w/reaction device, rotary transducer and display
AHBTS-5000	1.5" square drive, brake system w/reaction device, rotary transducer and display

Refer to Configuration Options below for required ordering options.

AHBTS Series High Capacity Test Stand with Brake System Configuration Options

Base Model Number	Display	Legs	Base Size	Rundown Fixture Capacity (ft-lb)	Reaction Post	Casters	Articulated Arm and Mount	Digital Module
AHBTS-xxxx	4 = ATDA-8000 Digital (7") 5 = ATDA-8000-10 Digital (Requires Display Controller)	1 = 6" 2 = No legs (Standard) 3 = 18" 4 = Custom	0 = 8 x 8" 1 = 12 x 12" 3 = 14 x 19" (Standard) 4 = 18 x 24" 5 = 18 x 36" 6 = NA	2 = No	1 = Single Post 2 = No 3 = Multiple Posts 6" 5 = Custom 6 = Single Post 9" 7 = Multiple Posts 9"	1 = Yes 2 = No	1 = Yes 2 = No	1 = Yes 2 = No (For Tablet or PC Direct)
Model # Digits 1-10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digit 15	Model # Digit 16	Model # Digit 17	Model # Digit 18
AHBTS-2500 3,400 Nm / 2,500 ft-lb				2				
AHBTS-5000 6,800 Nm / 5,000 ft-lb				2				

AUDITOR TORQUE WRENCHES

TORQUE MEASUREMENT: TORQUE WRENCH

Features and Benefits

- Multiple Options from Simple to Sophisticated
- Similar Interface with other Auditor Products
- Durable



	ADW	ADW-DC	APTW	ATW	MOMENT ALPHA
	* Auditor Digital Wrench	* Auditor Digital Wrench with Data Collection	Auditor Preset Torque Wrench	Auditor Torque Wrench	Digital Wrench with Torque & Angle
Torque Range	10 - 500 Nm 7 - 370 ft-lb	10 - 500 Nm 7 - 370 ft-lb	5 - 340 Nm 4 - 250 ft-lb	5 - 200 Nm 4 - 148 ft-lb	Screwdriver: 0.5 - 5 Nm 0.4 - 3.7 ft-lb Wrench: 4 - 1,000 Nm 3.0 - 738 ft-lb Click: 5 - 340 Nm 3.7 - 251 ft-lb
	Digital wrench with multiple head options for line side testing/auditing	Data-collecting digital wrench with multiple head options for line side testing/auditing	Interchangeable heads. Preset uses proprietary adjustment tool to guard against unauthorized setting changes	Transducer on a stick. Communicates with data collecting testers and analyzers	Ensure accuracy in quality QR production applications. Wifi/Bluetooth delivery
Bi-Directional accuracy of +/- X of indicated reading within the top 90% of the tester's capacity	1%	1%	3%	0.50%	±4%
Software Included	X	X			

USED IN CONJUNCTION WITH

ATDA(DC) Data Analyzer				X	
AUET(DC) Tester				X	
AUET/MTM(DC) Tester				X	

TORQUE WRENCH LOADERS



For Calibration of all types of torque wrenches eliminating human variable for more accurate measurement - digital transducer used with ATDA-8000-10-DCA

ATWL-250	Torque range up to 340 Nm / 250 ft-lb
ATWL-750	Torque range up to 1,020 Nm / 750 ft-lb
ATWL-1000	Torque range up to 1,360 Nm / 1,000 ft-lb

AUDITOR DIGITAL WRENCH SERIES



ADW-0010K111312222



ADW-1400F125312222

ADW DATA COLLECTING TORQUE WRENCH

- Large memory capacity
- Every torque value has associated trace file
- “Pick a Point” and “Move On” feature
- Barcode scanner
- Alpha Numeric screen for entering text
- Field replaceable batteries
- Docking station connection
- Serial connection
- Battery charger connection
- Ergonomic handle
- Switch between measure and data collection modes at any time
- Multiple files and route capability
- Data memory and simple statistics “On Board”
- Complete statistical analysis, data archiving and exporting in Audit Manager software
- Five models standard ranges 10 - 500 Nm full scale
- Torsion transducer — not length dependent
- Transducer is replaceable
- 1,400 Nm model uses different handle design

MODEL	TORQUE RANGE		WEIGHT		OVERALL LENGTH		SQ. DRIVE
	NM	FT-LB	LB	KG	IN	MM	IN
ADW-0010K	1 - 10	0.7 - 7.4	2.2	1	18	457.2	1/4
ADW-0075K	7.5 - 75	5.5 - 55	3.1	1.4	23.5	596.9	3/8
ADW-0180K	18 - 180	13 - 130	3.6	1.6	30.1	765.2	1/2
ADW-0270K	27 - 270	20 - 198	3.6	1.6	30.1	765.2	3/4
ADW-0500K	50 - 500	37 - 369	4	1.8	36	914	1
ADW-1400F	140 - 1,400	103 - 1,033	4.8	2.2	60	1,524	1

Unit accuracy is $\pm 1.0\%$ FSD of indicated reading for the top 95% of full scale as indicated above.

Each model includes a case, a battery charger, and a standard square-drive head. Other heads are available at additional cost.

*Part numbers with K, D or F followed by a 1 designate models with file and route capability. K followed by 2 indicate sequential memory but no file capability.

Part numbers with K, D or F followed by a 1,1 indicate file and route with bar code and docking station capability. K, D or F followed by a 1,2 indicate file and route capability with serial port only.

Please refer to the Configuration Options table on following page for required ordering options.



ADW-DS

DOCKING STATION

- Nest for accepting all wrench sizes
- Charger and serial communication accomplished through docking station
- Bench mountable

AUDITOR DIGITAL WRENCH SERIES

ADW Series Digital Torque Wrenches Configuration Options

Base Model Number	Style	Data Collector	Bar Code and Docking Station	Square Drive Size	Type of Transducer	Engineering Unit	Future Options
ADW-xxxx	K = Katana D = Katana with Dovetail Transducer F = Straight Stick	1 = Yes 2 = No	1 = Yes 2 = No (Serial Port Only)	1 = 1/4" 2 = 3/8" 3 = 1/2" 4 = 3/4" 5 = 1" 6 = N/A	1 = Intellect 2 = Industrial Standard 3 = N/A	1 = Nm 2 = Ft-lb 3 = In-lb	Not yet available. Enter 2222 for model # digits 15-18
Model # Digits 1-8	Model # Digit 9	Model # Digit 10	Model # Digit 11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digits 15-18

Non Data-Collecting (Sequential Memory)

ADW-0010K2 10 Nm / 7.4 ft-lb	K or D	2	2	1 or 2	3	1	2222
ADW-0075K2 75 Nm / 55 ft-lb	K or D	2	2	2	3	1	2222
ADW-0180K2 180 Nm / 130 ft-lb	K or D	2	2	3	3	1	2222
ADW-0270K2 270 Nm / 198 ft-lb	K or D	2	2	3	3	1	2222
ADW-0500K2 500 Nm / 369 ft-lb	K or D	2	2	4	3	1	2222
ADW-1000K2 1,000 Nm / 738 ft-lb	F	2	2	4 or 5	3	1	2222
ADW-1200K2 1,200 Nm / 885 ft-lb	F	2	2	5	3	1	2222
ADW-1000K2 1,400 Nm / 1,033 ft-lb	F	2	2	5	3	1	2222
ADW-1200K2 2,000 Nm / 1,475 ft-lb	F	2	2	5	3	1	2222

Data Collecting (File and Route Capability)

ADW-0010K1 10 Nm / 7.4 ft-lb		1		1 or 2	3	1	2222
ADW-0075K1 75 Nm / 55 ft-lb		1		2	3	1	2222
ADW-0180K1 180 Nm / 130 ft-lb		1		3	3	1	2222
ADW-0270K1 270 Nm / 198 ft-lb		1		3	3	1	2222
ADW-0500K1 500 Nm / 369 ft-lb		1		4	3	1	2222
ADW-1000K2 1,000 Nm / 738 ft-lb	F			4 or 5	3	1	2222
ADW-1200K2 1,200 Nm / 885 ft-lb	F			5	3	1	2222
ADW-1000K2 1,400 Nm / 1,033 ft-lb	F			5	3	1	2222
ADW-1200K2 2,000 Nm / 1,475 ft-lb	F			5	3	1	2222

Standard capacities shown. Additional capacities available on request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR ELECTRONIC TORQUE WRENCHES

ALLOW PRECISE TIGHTENING AND AUDITING OF YOUR ASSEMBLY APPLICATIONS

“TRANSDUCERS ON A STICK”

- Non-Length Dependent – Where the operator's hand is positioned during use has no effect on torque readings
- Available in Industry Standard (IS) or Intelligent (Intellect) Configurations – Transducer is compatible with a wide variety of IS style instruments or Auditor Intellect instruments that self recognize the transducer
- Durable – Steel, Aluminum and Carbon Fiber construction provide optimal strength and weight. Transducer supplied with overload capacity of 150% of full scale
- Accurate – Torque readings are accurate to 1% of indicated reading in top 95% of full scale



MODEL	TORQUE RANGE		SQUARE DRIVE
	NM	FT-LB	IN
ATW-0100F	14 - 136	10 - 100	3/8
ATW-0200F	27 - 272	20 - 200	1/2
ATW-0500F	68 - 680	50 - 500	3/4
ATW-1000F	136 - 1,360	100 - 1,000	1

Unit accuracy is $\pm 0.5\%$ of indicated reading for the top 90% of full scale as indicated above.
Required Accessory: ATDBRIS IS cable to connect Auditor ATDA instrument.

AUDITOR™

AUDITOR PRESET TORQUE WRENCHES

FEATURES AND BENEFITS

- Easy-to-use preset wrenches for fastener torque auditing
- Torque ranges from 5 – 340 Nm
- User friendly, sleek, ergonomic design
- Tactile feedback on achievement of preset torque
- Proprietary adjustment tool guards against unauthorized setting changes
- Wide range of interchangeable heads provide flexibility and convenience
- +/- 3% accuracy when used in clockwise or counterclockwise directions



PRESET WRENCHES	DESCRIPTION
APTW-25	Auditor Preset Torque Wrench, 5 - 25 Nm, Accepts 12 mm Inserts
APTW-50	Auditor Preset Torque Wrench, 10 - 50 Nm, Accepts 12 mm Inserts
APTW-100	Auditor Preset Torque Wrench, 20 - 100 Nm, Accepts 12 mm Inserts
APTW-150	Auditor Preset Torque Wrench, 30 - 150 Nm, Accepts 12 mm Inserts
APTW-200	Auditor Preset Torque Wrench, 40 - 200 Nm, Accepts 14 mm Inserts
APTW-340	Auditor Preset Torque Wrench, 60 - 340 Nm, Accepts 14 mm Inserts

RATCHET AND SQUARE DRIVE HEADS	DESCRIPTION
9 x 12	
APTH-12RT25	Auditor Preset Torque Wrench Ratchet Insert, 1/4 SQ DR, 12 mm
APTH-12RT38	Auditor Preset Torque Wrench Ratchet Insert, 3/8 SQ DR, 12 mm
APTH-12RT50	Auditor Preset Torque Wrench Ratchet Insert, 1/2 SQ DR, 12 mm
APTH-12SD25	Auditor Preset Torque Wrench SQ DR Insert, 1/4 SQ DR, 12 mm
APTH-12SD38	Auditor Preset Torque Wrench SQ DR Insert, 3/8 SQ DR, 12 mm
APTH-12SD50	Auditor Preset Torque Wrench SQ DR Insert, 1/2 SQ DR, 12 mm
14 x 18	
APTH-14RT50	Auditor Preset Torque Wrench Ratchet Insert, 1/2 SQ DR, 14 mm
APTH-14RT34	Auditor Preset Torque Wrench Ratchet Insert, 3/4 SQ DR, 14 mm
APTH-14SD50	Auditor Preset Torque Wrench SQ DR Insert, 1/2 SQ DR, 14 mm



OPEN END HEADS DESCRIPTION

9 x 12

APTH-120E7	Auditor Preset Torque Wrench Insert 7 mm OE, 12 mm
APTH-120E8	Auditor Preset Torque Wrench Insert 8 mm OE, 12 mm
APTH-120E9	Auditor Preset Torque Wrench Insert 9 mm OE, 12 mm
APTH-120E10	Auditor Preset Torque Wrench Insert 10 mm OE, 12 mm
APTH-120E11	Auditor Preset Torque Wrench Insert 11 mm OE, 12 mm
APTH-120E12	Auditor Preset Torque Wrench Insert 12 mm OE, 12 mm
APTH-120E13	Auditor Preset Torque Wrench Insert 13 mm OE, 12 mm
APTH-120E14	Auditor Preset Torque Wrench Insert 14 mm OE, 12 mm
APTH-120E15	Auditor Preset Torque Wrench Insert 15 mm OE, 12 mm
APTH-120E16	Auditor Preset Torque Wrench Insert 16 mm OE, 12 mm
APTH-120E17	Auditor Preset Torque Wrench Insert 17 mm OE, 12 mm
APTH-120E18	Auditor Preset Torque Wrench Insert 18 mm OE, 12 mm
APTH-120E19	Auditor Preset Torque Wrench Insert 19 mm OE, 12 mm
APTH-120E20	Auditor Preset Torque Wrench Insert 20 mm OE, 12 mm

14 x 18

APTH-140E1	Auditor Preset Torque Wrench Insert 1" OE, 14 mm
APTH-140E13	Auditor Preset Torque Wrench Insert 13 mm OE, 14 mm
APTH-140E14	Auditor Preset Torque Wrench Insert 14 mm OE, 14 mm
APTH-140E15	Auditor Preset Torque Wrench Insert 15 mm OE, 14 mm
APTH-140E16	Auditor Preset Torque Wrench Insert 16 mm OE, 14 mm
APTH-140E17	Auditor Preset Torque Wrench Insert 17 mm OE, 14 mm
APTH-140E18	Auditor Preset Torque Wrench Insert 18 mm OE, 14 mm
APTH-140E19	Auditor Preset Torque Wrench Insert 19 mm OE, 14 mm
APTH-140E21	Auditor Preset Torque Wrench Insert 21 mm OE, 14 mm
APTH-140E22	Auditor Preset Torque Wrench Insert 22 mm OE, 14 mm
APTH-140E24	Auditor Preset Torque Wrench Insert 24 mm OE, 14 mm
APTH-140E25	Auditor Preset Torque Wrench Insert 25 mm OE, 14 mm
APTH-140E27	Auditor Preset Torque Wrench Insert 27 mm OE, 14 mm
APTH-140E30	Auditor Preset Torque Wrench Insert 30 mm OE, 14 mm
APTH-140E32	Auditor Preset Torque Wrench Insert 32 mm OE, 14 mm
APTH-140E34	Auditor Preset Torque Wrench Insert 34 mm OE, 14 mm
APTH-140E36	Auditor Preset Torque Wrench Insert 36 mm OE, 14 mm
APTH-140E38	Auditor Preset Torque Wrench Insert 38 mm OE, 14 mm
APTH-140E41	Auditor Preset Torque Wrench Insert 41 mm OE, 14 mm
APTH-140E118	Auditor Preset Torque Wrench Insert 1-1/8" OE, 14 mm
APTH-140E138	Auditor Preset Torque Wrench Insert 1-3/8" OE, 14 mm

MOMENT ALPHA DIGITAL TORQUE WRENCH

DIGITAL WRENCH WITH TORQUE AND ANGLE ENSURES ACCURACY IN QUALITY OR PRODUCTION APPLICATIONS

Moment Alpha is a modular digital wrench/torque system that ensures accurate, measurable tightening every time. Designed for both torque and angle measurement, the system can be used in both quality and production applications.


With the introduction of the new Mechanical Click system, Moment Alpha offers increased functionality. Quick and easy torque validation with data collection to ensure accurate rundowns on critical joints.



MODULAR SYSTEM → ULTIMATE FLEXIBILITY

FEATURES AND BENEFITS

- Torque *and* angle measurement
- Modular system with automatic detection of accessories
- Bluetooth communication between wrench and controller
- One wrench/tablet analyzer to perform audits in full torque range from 0.5 – 1,000 Nm (with optional accessories)
 - Screwdriver mode from 0.5 – 5 Nm
 - Flexion mode (wrench) from 4 – 1,000 Nm
- Works in both clockwise and counter-clockwise operation
- Uses standard drive adapters see page 82)
- Data collection with Data storage of 50,000 readings and 1,000 traces
- Tactile feedback to operator
- Rechargeable battery pack for wrench handle

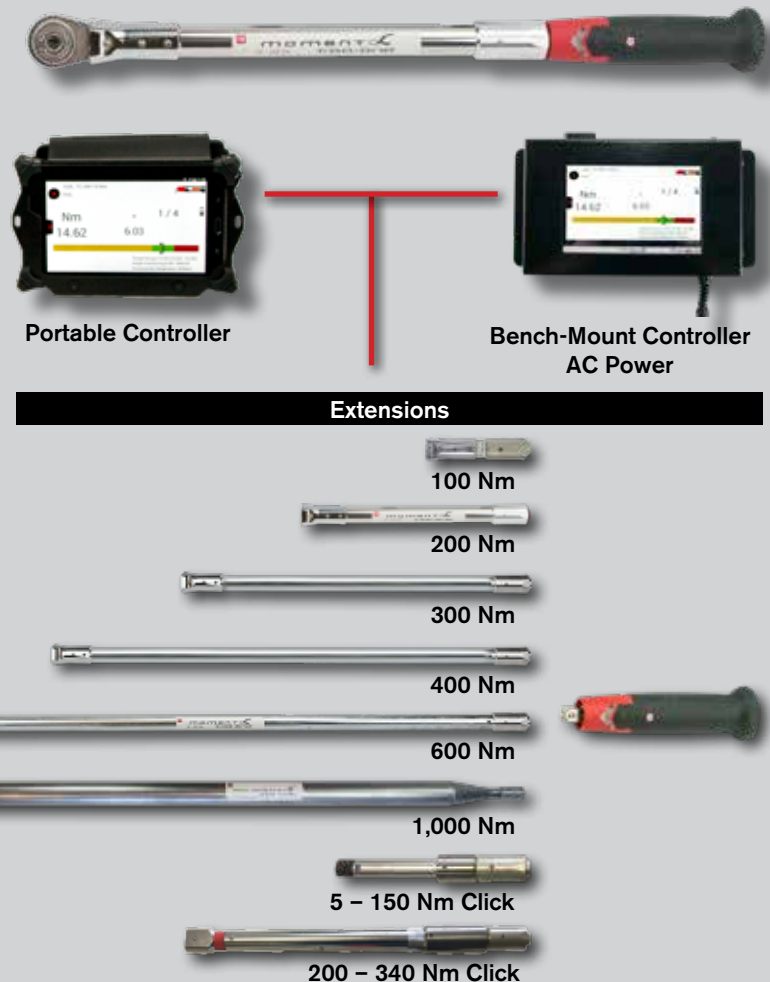

MOMENT ALPHA DIGITAL TORQUE WRENCH

WRENCH HANDLE



WRENCH HANDLE	TORQUE RANGE	LENGTH	WEIGHT	TORQUE TRANSDUCER ACCURACY	TIGHTENING ACCURACY	ANGLE TRANSDUCER ACCURACY
CPSKV00	Screwdriver Mode: 0.5 - 5 Nm Wrench Mode: 4 - 40 Nm (requires CPSJP81 adapter) 4 - 1,000 Nm (with appropriate extension*)	7.9" 200 mm	0.82 lb 0.37 kg	ISO 6789 < 1%	< ±4%	±1%

* Wrench handle supplied with battery. Specific extensions for specific torques available separately. Contact an AIMCO Customer Service Associate, 1-800-852-1368.

CONTROLLERS



CPSKT82 Portable Controller



CPSKR81 Bench-Mount Controller, AC Power

MODEL	DESCRIPTION	SIZE	WEIGHT
CPSKT82	Portable Controller w/out software	7.1" x 13.8" x 5.9" 180 x 350 x 150 mm	7.05 lbs 3.2 kg
CPSKR81	Bench-Mount Controller w/out software	8.7" x 5.4" x 1.3" 221 x 138 x 32 mm	1.05 lbs 0.5 kg
CPSKS50	Production Premium Software		
CPSKU50	Quality Premium Software		

FEATURES AND BENEFITS

- Preset tightening settings
- Audible alarm
- Four tightening modes: Torque, Angle, Torque and Angle, Angle and Torque
- 7" color display touchscreen
- International units: Nm, kg/m, kp/m, ft-lb, in-lb, ft-oz, in-oz
- Sturdy and suited to industrial environments
- For greater flexibility, software is interchangeable between direct plug-in and battery-operated models

MOMENT ALPHA DIGITAL TORQUE WRENCH


STANDARD SYSTEM (SHOWN WITH PORTABLE CONTROLLER)



	KIT MODEL*	PARTS INCLUDED
PRODUCTION	CPSKS00	Includes (1) Wrench, (1) Wrench Battery, (1) Battery Charger, (1) 40 Nm Adapter, (1) Bench-Mount Controller and Production Premium Software, (1) 200 Nm Extension, (1) 600 Nm Extension, and (1) 14 x 18 Ratchet Head (see p. 82)
	CPSMH00	Includes (1) Wrench, (1) Wrench Battery, (1) Battery Charger, (1) 40 Nm Adapter, (1) Bench-Mount Controller and Production Premium Software
QUALITY	CPSKU00	Includes (1) Wrench, (1) Wrench Battery, (1) Battery Charger, (1) 40 Nm Adapter, (1) Portable Controller and Quality Premium Software, (1) 200 Nm Extension, (1) 600 Nm Extension, and (1) 14 x 18 Ratchet Head (see p. 82)
	CPSMJ00	Includes (1) Wrench, (1) Wrench Battery, (1) Battery Charger, (1) 40 Nm Adapter, (1) Portable Plug-In Controller and Quality Premium Software

* Additional kits available. Contact an AIMCO Customer Service Associate, 1-800-852-1368.

CLICK WRENCH EXTENSIONS (SHOWN WITH BENCH-MOUNT CONTROLLER)

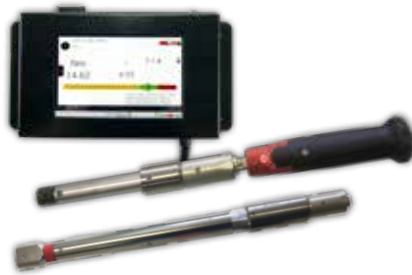

The Smart Click Wrench improves the torque validation process by offering Torque AND Angle measurement which can be used to error proof your process by detecting double hit and

overshoot (thread stripping). The controller stores 100,000 data points and 1,000 traces. The wrench provides tactical operator feedback with visual and audible queues.

EXTENSIONS AND ACCESSORIES



Battery, Battery Charger, Adapter

MODEL	DESCRIPTION		
CPSJP75	Battery Unit for Handle (includes 3 rechargeable AA batteries)		
CPSJP73	Battery Charger		
MODEL	DESCRIPTION	LENGTH	WEIGHT
CPSJP81	Adapter 40 Nm	3.5" / 89 mm	0.03 lb / 0.01 kg

Extensions



MODEL	DESCRIPTION	SIZE	END EFFECTOR CONNECTION	WEIGHT
CPSKS86	Extension 100 Nm	5.71" / 145 mm	14 x 18*	0.06 lb / 0.03 kg
CPSKS81	Extension 200 Nm	14.41" / 366 mm	14 x 18*	1.1 lb / 0.5 kg
CPSKS85	Extension 300 Nm	27.06" / 688 mm	14 x 18*	2.6 lb / 1.2 kg
CPSKS87	Extension 400 Nm	30.27" / 769 mm	14 x 18*	3.08 lb / 1.4 kg
CPSKS82	Extension 600 Nm	42.72" / 1,085 mm	14 x 18*	5.07 lb / 2.3 kg
CPSKS98	Extension 1,000 Nm	70.86" / 1,800 mm	1"	5.07 lb / 2.3 kg

CLICK EXTENSIONS

CPSPH05	Extension 5 - 25 Nm	6.85" / 174 mm	9 x 12*	1.15 lb / 0.5 kg
CPSPH10	Extension 10 - 50 Nm	9.21" / 234 mm	9 x 12*	1.4 lb / 0.6 kg
CPSPH20	Extension 20 - 100 Nm	12.09" / 307 mm	9 x 12*	1.65 lb / 0.7 kg
CPSPH30	Extension 30 - 150 Nm	15.59" / 396 mm	9 x 12*	1.85 lb / 0.8 kg
CPSPH40	Extension 40 - 200 Nm	17.83" / 453 mm	14 x 18*	3.5 lb / 1.6 kg
CPSPH60	Extension 60 - 340 Nm	21.30" / 541 mm	14 x 18*	4.3 lb / 2.0 kg

* End Effectors sold separately. Contact an AIMCO Customer Service Associate, 1-800-852-1368.

iTVC TORQUE CART



AIMCO's iTVC Torque Cart is designed for "lineside" or "point of use" tool validation and calibration. Our torque carts allow testing of tools on repeatable joint simulators and "in process" use on production joints, allowing users to identify process capability. Multiple torque cart configurations are available with simple to sophisticated options:

- Manual push carts equipped with simple torque testers
- Manual push carts equipped with data collectors and database application software
- Self propelled cart with computer and relational database application
- Driven cart with computer and relational database application



FEATURES AND BENEFITS

- For testing on repeatable joint simulators or actual production joints
- Mobile test carts can be configured for testing continuous and discontinuous drive tools, including DC electric, clutch, battery, impulse, and torque wrenches
- Each cart is customizable to meet testing needs from 1–1,400 Nm
- Hydraulic braking systems available as an option where linear control of a braking ramp is desired and/or to eliminate the need to reverse each rundown
- Data management software options are available to suit specific audit or asset-tracking needs
- Torque wrench loaders are configurable to suit wrench populations

Carts can be equipped to specific customer requirements. Ancillary test stands up to 50,000 ft-lb available. Contact an AIMCO Customer Service Associate for a quote or for more details, 1-503-254-6600, or toll free 1-800-852-1368.




		LOW TORQUE		HIGH TORQUE		
		NM		FT-LB		
MODEL	DESCRIPTION	NM	FT-LB	NM	FT-LB	
UFT	MOBILE-POWERED					
	iTVC.A	Torque Cart, UFT Mobile BASE#				
	iTVC.A2XXXXXX	NO JOINTS	0	0	0	0
	iTVC.A2XBCXXX	2 UFTs	15	11	190	140
	iTVC.A2XBCDXX	3 UFTs	15	11	686	506
	iTVC.A2ABCDXX	4 UFTs	1	0.7	686	506
	iTVC.A2ABCDEP	4 UFTs, 1 AJKR, Printer	1	0.7	1,400	1,033
	MANUAL					
	iTVC.A1XXXXXX	Torque Cart, UFT Manual BASE#				
	iTVC.A1XBCXXX	2 UFTs	15	11	190	140
	iTVC.A1XBCDXX	3 UFTs	15	11	686	506
	iTVC.A1ABCDXX	4 UFTs	1	0.7	686	506
	iTVC.A1ABCXEX	3 UFTs, 1 AJKR	1	0.7	1,400	1,033
	iTVC.A1ABCDEP	4 UFTs, 1 AJKR	1	0.7	1,400	1,033
AJKR	MOBILE-POWERED					
	iTVC.B2XXXXXX	Torque Cart, AJKR Mobile BASE#				
	iTVC.B2XBCXX	2 JOINTS	27	20	271	200
	iTVC.B2XBCEX	3 JOINTS	27	20	1,400	1,033
	iTVC.B2ABCEP	4 JOINTS	6	4.4	1,400	1,033
	MANUAL					
	iTVC.B1XXXXXX	Torque Cart, AJKR Manual BASE#				
	iTVC.B1XBCXX	2 JOINTS	27	20	271	200
	iTVC.B1XBCEX	3 JOINTS	27	20	1,400	1,033
	iTVC.B1ABCEP	4 JOINTS	6	4.4	1,400	1,033
BASE	MOBILE-POWERED					
	iTVC.X2X	CART, NO COMPUTER	—	—	—	—
	iTVC.X2A	CART, W/COMPUTER	—	—	—	—
	MANUAL					
	iTVC.X1X	CART, NO COMPUTER	—	—	—	—
	iTVC.X1A	CART, W/COMPUTER	—	—	—	—

iTVC TORQUE CART DATA COLLECTION SOFTWARE

DATAPRO SOFTWARE + SQNET SOFTWARE - TORQUE CART DATA MANAGEMENT

As the data management system for the AIMCO Torque Cart line, DataPro and SQnet software provide tool management, verification, and calibration. Users can manage complete tool inventory, create jobs/routes, and store collected data. Calibration sequencing can be scheduled by time or number of rundowns.

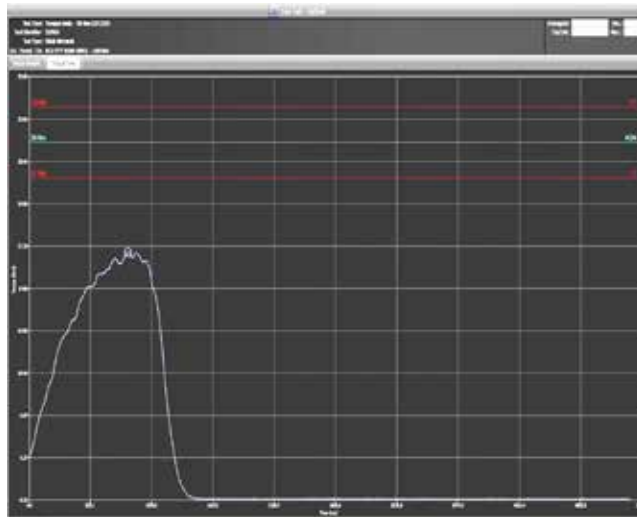


Torque Values from a Click Wrench

TORQUE VERIFICATION

DataPro displays sample values of torque, angle, and pulse count. It calculates statistics: average, Cp, Cpk, Six Sigma, and Mean variation. As values are measured, they are graphically plotted on a X-bar range chart scaled to specification limits.

DATABASE INFORMATION

View operation lists and associated tools along with historic test or quality data. From the historic data screen, launch statistical graphs to view and analyze archived data. Graphs include X-bar range, histogram, Six Sigma, Cp, and Cpk graphs.

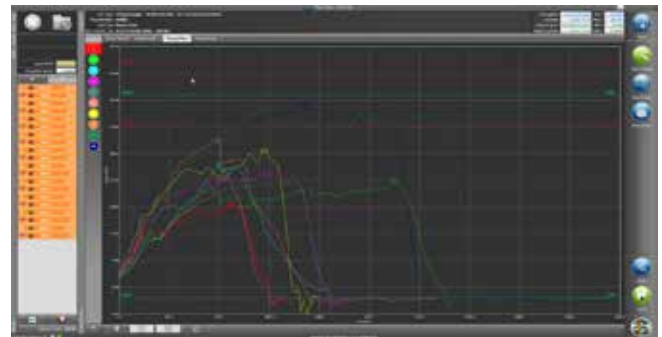

TRACES

The axis of the trace can be torque/time, torque/angle, angle/time. Save a trace, retrieve it, and overlay a new trace for comparison. Trace details are displayed at the bottom of the graph: max. values, plot time (ms), number of data points, filter frequency, and sample rate.

SQNET - QUALITY CONTROL & PRODUCTION LINE

SQnet is designed to manage quality control of the production line, manage all the tools (supplier, models, technical specifications), and manage related quality-control tests (Cm, Cmk, and XR charts).

Quality: manage tools, operation locations, and quality-control of production lines.

Production: check residual torque or perform joint analysis in order to test bench settings and to set accurate tightening parameters.

TRANSDUCERS

TORQUE MEASUREMENT: TRANSDUCERS

Features and Benefits

Superior:

- Accuracy
- Compatibility
- Durability

Auditor offers multiple styles of transducers in various configurations. Industry standard transducers (2mv/v) and intellect transducers for Auditor instruments that reduce configuration set up time.

Rotary	Stationary	
		
ARTIS	ASTIS	AISI - AISF*
Auditor Rotary Transducer Industry Standard	Auditor Stationary Transducer Industry Standard	Auditor Industry Standard Stationary

Used in Conjunction with Analyzer

ATC	X		
AUET	X		
AUET/MTM	X	X	X
ATDA	X	X	X
ATDA-8000			X

* See Configuration Options on following page to configure complete part number for AISI / AISF models. Please contact an AIMCO Customer Service Associate for additional information, 1-503-254-6600, or toll free 1-800-852-1368.

AUDITOR ROTARY TRANSDUCERS

Suitable for use with all continuous drive tools, impulse tools and torque wrenches.



ARTIS Series

MODEL	DRIVE	MAX TORQUE		WEIGHT
	IN	NM	IN-LB/FT-LB	LB
ARTIS-25H-2T(A)	1/4 Hex	2	18 in-lb	1.0
ARTIS-25H-5T(A)	1/4 Hex	5	44 in-lb	1.0
ARTIS-25H-10T(A)	1/4 Hex	10	88 in-lb	1.0
ARTIS-25H-20T(A)	1/4 Hex	20	180 in-lb	1.0
ARTIS-25S-10T(A)	1/4 Sq.	10	88 in-lb	1.0
ARTIS-25S-20T(A)	1/4 Sq.	20	180 in-lb	1.0
ARTIS-38S-25T(A)	3/8 Sq.	25	225 in-lb	1.2
ARTIS-38S-75T(A)	3/8 Sq.	75	50 ft-lb	1.2
ARTIS-50S-180T(A)	1/2 Sq.	180	130 ft-lb	1.5
ARTIS-75S-250T(A)	3/4 Sq.	250	180 ft-lb	2.2
ARTIS-75S-500T(A)	3/4 Sq.	500	370 ft-lb	2.2
ARTIS-100S-750T(A)	1 Sq.	750	553 ft-lb	4.0
ARTIS-100S-1400T(A)	1 Sq.	1400	1,025 ft-lb	4.0

*Add "A" to the end of the part number to indicate torque/angle transducer.

AUDITOR™

TRANSDUCERS

AUDITOR STATIONARY TRANSDUCERS

Stationary Transducers with joint rundown fixtures and, where applicable, bench stands.



ASTIS

ASTIS industry standard transducers can be used with multiple analyzers.

MODEL	MAX TORQUE		DRIVE IN
	NM	IN-LB/FT-LB	
ASTIS-250-11	11	100 in-lb	1/4
ASTIS-250-28	28	250 in-lb	1/4
ASTIS-380-135	135	100 ft-lb	3/8
ASTIS-500-270	270	200 ft-lb	1/2
ASTIS-750-1000	1017	750 ft-lb	3/4
ASTIS-1000-1700	1,695 Nm	750 ft-lb	1
ASTIS-100S-3000	4,100 Nm	3,000 ft-lb	1



AISI

AISI / AISF Transducers connect to the AUET/MTM, ATDA, and ATDA-8000 analyzers and mount directly to a benchtop.

MODEL*	MAX TORQUE		WEIGHT		W X H X D		DRIVE IN
	NM	IN-LB/FT-LB	KG	LB	MM	IN	
AISI-200025	2.8	25	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4
AISI-200100	11.3	100	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	1/4
AISI-200500	56.5	500	1.13	2.5	79 x 95 x 83	3.13 x 3.75 x 3.25	3/8
AISF-200100	135.6	1,200/100	2.25	5	100 x 65	4 x 3	1/2
AISF-200250	339	3,000/250	2.25	5	100 x 65	4 x 3	1/2
AISF-201000	1,350	12,000/1,000	2.8	6	100 x 65	4 x 3	1

* See Configuration Options below to configure complete part number for AISI / AISF models.

Auditor AISI / AISF Industry Standard Transducers Configuration Options

Base Model #	Angle	Capacity	Configuration	Expanded Range*	Digital	Drive Size	Wireless
Model # Digits 1-5	Model # Digit 6	Model # Digits 7-11	Model # Digit 12	Model # Digit 13	Model # Digit 14	Model # Digit 15	Model # Digit 16
Stationary							
AISI- (in-lb capacities)	2						2
AISF- (ft-lb capacities)	2						2

*Standard range is 10%-100% of maximum capacity. Expanded range is 5%-100% of maximum capacity.

Transducers are available in capacities of up to 10,000 Ft-Lb. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

RUNDOWN FIXTURES

TORQUE MEASUREMENT: RUNDOWN FIXTURES

Features and Benefits

- Enables accurate and repeatable testing of pneumatic or electric power tools
- Mechanical Belleville system of bolt, nut or nut body, Belleville washers and main housing, 1/4" - 3/4" drive sizes, 10 in-lb - 1,200 ft-lb
- Fixtures can be ordered to simulate hard, med., or soft joints



ARDFA-XXXXHD
ARDIA-XXXXHD

ARDFA-XXXHDS
ARDIA-XXXHDS

ARDFA-XXXHDE
ARDIA-XXXHDE

ARDFA-XXX
ARDIA-XXX

Wear-Resistant Heavy Duty	X			
Heavy Duty, Fully Encapsulated		X		
Heavy Duty, Encapsulated Washers			X	
Standard (Included w/analyzer)				X
Spline Drive				
Used in Conjunction with External Transducer				
ASTIS	X	X	X	X
AISI / AISF	X	X	X	X
ARTIS	X	X	X	X

*Spline drive feature provides rundown control when testing pulse tools.

AUDITOR RUNDOWN FIXTURES

To test power tools, pneumatic or electric, consistent rotational speed must be achieved. The joint rundown fixture/simulator provides the means by which the tool motor and spindle rotates freely at the start of the test cycle and then develops torque as rotation resistance increases as fastener/joint load increases. The linearity and consistency of the joint rundown fixtures/simulators vary greatly and the tool test data is a product of the variations in these rundown fixtures. Higher quality joint rundown fixtures produce torque data with less scatter.



HDS Series



HDE Series



HD Series

ARDIA MODELS

MODEL*	RECOMMENDED TORQUE RANGE NM	IN-LB	SQUARE DRIVE
ARDIA-10(HD)(HDE)(HDS)	.13 - 1.13	1.0 - 10	1/4"
ARDIA-25(HD)(HDE)(HDS)	.28 - 2.8	2.5 - 25	1/4"
ARDIA-50(HD)(HDE)(HDS)	.56 - 5.6	5 - 50	1/4"
ARDIA-100(HD)(HDE)(HDS)	1.3 - 11.3	10 - 100	1/4"
ARDIA-150(HD)(HDE)(HDS)	1.7 - 16.9	15 - 150	1/4"
ARDIA-250(HD)(HDE)(HDS)	2.8 - 28.3	25 - 250	3/8"
ARDIA-350(HD)(HDE)(HDS)	4 - 40	35 - 350	3/8"
ARDIA-500(HD)(HDE)(HDS)	5.6 - 56.5	50 - 500	3/8"
ARDIA-750(HD)(HDE)(HDS)	8.5 - 84.7	75 - 750	3/8"
ARDIA-1000(HD)(HDE)(HDS)	11.3 - 113	100 - 1,000	3/8"

*Add "HD" to part numbers for wear resistant models. Add "HDS" to part numbers for fully encapsulated wear resistant models.

*Add "HDE" to part numbers for partial encapsulated wear resistant models.

ARDFA MODELS

MODEL*	RECOMMENDED TORQUE RANGE NM	FT-LB	SQUARE DRIVE
ARDFA-100(HD)(HDE)(HDS)	13.6 - 136	10 - 100	1/2"
ARDFA-150(HD)(HDE)(HDS)	20.4 - 204	15 - 150	1/2"
ARDFA-250(HD)(HDE)(HDS)	34 - 340	25 - 250	1/2"
ARDFA-500(HD)(HDE)(HDS)	67.8 - 678	50 - 500	3/4"
ARDFA-600(HD)(HDE)(HDS)	81.6 - 816	60 - 600	3/4"
ARDFA-750(HD)(HDE)(HDS)	101.7 - 1,017	75 - 750	3/4"

* Add "HD" to part numbers for wear resistant models. Add "HDS" to part numbers for encapsulated wear resistant models.

* Add "HDE" to part numbers for partial encapsulated wear resistant models.

JOINT KITS / JOINT SIMULATORS

JOINT KITS


Joint kits are an essential accessory for accurate off-line testing of powered assembly tools.

- Represent production joint conditions off the production line
- Can be adjusted to include joint conditions specified by ISO 5393
- Allows free running of bolt before torque gradient
- Provide linear response. Repeatable 1/4" – 1" drive sizes, 28 – 1,695 Nm.

ROTARY KIT*	MODEL	DRIVE SIZE - IN
	AJKR-28	1/4
	AJKR-135	3/8
	AJKR-271	1/2
	AJKR-1017	3/4
	AJKR-1695	1
STATIONARY KIT**	MODEL	DRIVE SIZE - IN
	AJKS-25D	1/4
	AJKS-38D	3/8
	AJKS-50D	1/2
	AJKS-75D	3/4
	AJKS-100D	1

* AJKR for use with ARTIS external transducers.

**AJKS for use with ASTIS or ARTIS external transducers.

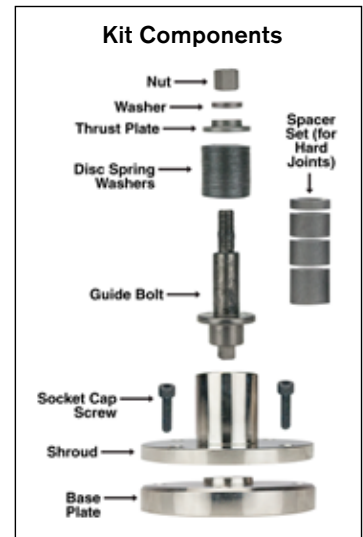

UFT SERIES HYDRAULIC MECHANICAL JOINT SIMULATORS



UFT-6

UFT-10

UFT-16



UFT-S10

UFT-S16



UFT-24

- Designed for pulse tool and continuous drive tool certification and testing, UFT Joint Simulators offer the most repeatable and linear joint rate simulation on the market
- For use with ARTIS external transducers
- Bolt tightening body and hydraulic pressure loading mechanism are connected by a hydraulic pressure circuit. Ideal for ISO 5393 test procedures
- Quickly and easily simulate three joint rates by opening or closing two external valves
- Specially coated testing bolt produces over 100,000 cycles without variation or deformation

MODEL	BOLT SIZE	TORQUE RANGE		WEIGHT	
		NM	FT-LB	LB	KG
UFT-6	M5	3.2 - 5.4	2 - 4	8	3.6
	M6	5.4 - 14.7	4 - 11		
UFT-10 / UFT-S10	M6	6.7 - 14.7	5 - 11	43	19.5
	M8	14.7 - 31.4	11 - 23		
	M10	31.4 - 53.9	23 - 40		
UFT-16 / UFT-S16	M12	53.9 - 88.2	40 - 65	88	40
	M14	88.2 - 149	65 - 110		
	M16	149 - 190	110 - 140		
UFT-24*	M18	190 - 294	140 - 217	108	49.1
	M20	294 - 441	217 - 325		
	M24	441 - 686	325 - 506		

* UFT-24 medium hard/soft joints only

Reaction fixture for continuous drive tools not included. Sockets included.

TORQUE MEASUREMENT CABLES



ICBL-USB



ATDBLIS



ATDBRIS



ICBL-10P



ICBL-4P



ICBL-5000L



ICBL-8000DIG

TORQUE MEASUREMENT CABLES

MODEL	DESCRIPTION	SERIAL CABLE	TRANSDUCER CABLE	ROTARY	ROTARY W/ANGLE	STATIONARY	IND STD	INTELLECT
ICBL-USB*	Connects between COM port of display to PC	X						
ATDBLIS*	Connect to IS transducer w/ angle - 10 pin		X		X		X	
ATDBRIS*	Connect to IS transducer - 4 pin		X	X		X	X	
ICBL-10P*	Intellect transducer cable. Identification chip in cable - 10 pin connector		X		X			X
ICBL-4P*	Intellect transducer cable. Identification chip in cable - 4 pin connector		X	X		X		X
ICBL-5000L	Connect from AUET/MTM & ATDA to Intellect Transducers, Analog AISI / AISF		X			X		X
ICBL-8000DIG	Connect from ATDA-8000 series analyzer to AISI / AIFI transducer		X					

* Compatible with ATDA, AUET, ADW products

TESTER / ANALYZER COMPATIBILITY

MODEL	ATC	AUET	AUET/MTM	AUET-DC	AUET/MTM-DC	ATDA	ATDA-DC	ATDA-8000	ATDA-8000-10-DCA(-TA)(-TP)	AISWT SWITCHBOX	ADW	ADW-DC	AIMTS TEST STAND
ICBL-USB	X	X	X	X	X	X	X				X	X	
ATDBLIS		X	X	X	X	X	X						
ATDBRIS		X	X	X	X	X	X						
ICBL-10P		X	X	X	X	X	X						
ICBL-4P		X	X	X	X	X	X						
ICBL-5000L			X		X	X	X	X	X	X			X
ICBL-8000DIG								X	X				

TRANSDUCER COMPATIBILITY

MODEL	STATIONARY			ROTARY
	ASTIS	ANALOG AISI/AISF	DIGITAL AISI/AISF	ARTIS
ATDBLIS				X
ATDBRIS	X			X
ICBL-10P				X
ICBL-4P				X
ICBL-5000L		X		
ICBL-8000DIG			X	

AUDITOR™

ACRADYNE HIGH TORQUE PNEUMATIC TOOLS

FEATURES AND BENEFITS

AcraDyne's High Torque Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners. Appropriate for use in industries requiring high torque capability, accuracy, power, and safety.

- Modular design allows for ease of maintenance
- Interchangeable motors and gearing
- Same proven and reliable gearbox as the AcraDyne DC line
- One-hand reverse



AAP1B66600A




AAP1B76950A



AAP1B772000A



AAP1B885100A

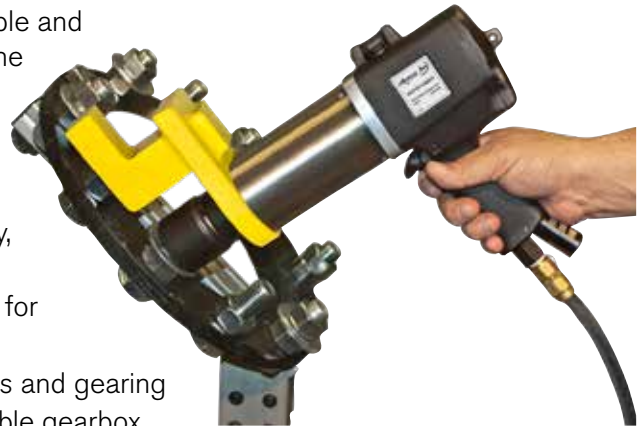

MODEL	TORQUE		SPEED	WEIGHT	SQUARE DR.	AIR CONSUMPTION
	(NM)	(FT-LB)	(RPM)	(LB)	(IN)	(CFM)
AAP1B66400A	400	300	57	9.75	3/4	22.9
AAP1B66600A	600	450	39	9.75	3/4	22.9
AAP1B66850A	850	625	27	9.75	3/4	22.9
AAP1B76950A	950	700	31	10.4	3/4	26.3
AAP1B771350A	1,350	1,000	22	10.4	1	26.3
AAP1B772000A	2,000	1,475	14	12.7	1	26.3
AAP1B772950A	2,950	2,175	9	14.9	1	26.3
AAP1B885100A	5,100	3,775	8	23	1-1/2	31.5

AIR PREPARATION UNITS

Many stacking filter/regulator combinations are available. See page 140 for options.



AFRL-4



**AFRL-4HTA
Standalone Unit**

**28178
HT Air Tool/AFRL
Carrying Kit**



ACRADYNE HIGH TORQUE HIGH-SPEED PNEUMATIC TOOLS

Our High-Torque High-Speed Pneumatic Bolting Tools offer a reliable and dependable solution for the installation and removal of heavy-duty fasteners with high torque capability, accuracy, power, and safety.

FEATURES AND BENEFITS

- Dual motor design provides extremely fast rundown speed
- Improved torque to weight ratio
- Full swivel gearcase facilitates reaction bar positioning for ease of use and operator comfort
- Handle exhaust with low sound level
- Uses the same durable and reliable gearbox from our DC line of high torque tools
- Modular design allows for easy maintenance
- Two-piece handle construction enables flexible handle design
- Available in reversible and non-reversible models



MODEL	TORQUE		SPEED	WEIGHT		LENGTH		SQUARE DR.
	(NM)	(FT-LB)	(RPM)	(LB)	(KG)	(IN)	(MM)	(IN)
AAP2B76250A	250	185	660	10.5	4.8	10	255	3/4
AAP2B76450A	450	330	335	10.5	4.8	10	255	3/4
AAP2B76650A	650	480	223	10.5	4.8	10	255	3/4
AAP2B76950A	950	700	153	10.5	4.8	10	255	3/4
AAP2B771400A	1,400	1,000	110	14.6	6.6	10	255	1
AAP2B772000A	2,000	1,475	63	14.8	6.7	11.2	284	1
AAP2B773000A	3,000	2,210	52	15.0	6.8	11.6	293	1
AAP2B785100A	4,800	3,540	26.5	19.7	8.9	13.3	338	1.5


REVERSIBLE MODEL	TORQUE		SPEED	WEIGHT		LENGTH		SQUARE DR.
	(NM)	(FT-LB)	(RPM)	(LB)	(KG)	(IN)	(MM)	(IN)
AAP2B76250AR	250	185	660	12.3	5.6	12.5	317	3/4
AAP2B76450AR	450	330	335	12.3	5.6	12.5	317	3/4
AAP2B76650AR	650	480	223	12.3	5.6	12.5	317	3/4
AAP2B76950AR	950	700	153	12.3	5.6	12.5	317	3/4
AAP2B771400AR	1,400	1,000	110	16.4	7.4	12.6	319	1
AAP2B772000AR	2,000	1,475	63	16.6	7.5	13.6	346	1
AAP2B773000AR	3,000	2,210	52	16.8	7.6	14.0	356	1
AAP2B785100AR	4,800	3,540	26.5	21.5	9.7	15.8	400	1.5

ACRADYNE HT PNEUMATIC TOOL ACCESSORIES

Polyurethane Hose for HT Tools



ASH-500C-15MSZ



Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.

- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility
- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104°F to 175°F
- Working pressure: 100 PSI

SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	NPT FITTINGS
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	1/2"



STRAIGHT AIR HOSE (SOLD PER FOOT)

MODEL	DESCRIPTION
ASH-500Z	1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-503-254-6600, or toll free 1-800-852-1368.

Rubber Hose for HT Tools



28796
1/2" ID

- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40°F to 190°F

SINGLE AIR HOSE (RUBBER)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.


REACTION BARS

Tool includes standard, spline attachment reaction device. See page 32 for part numbers. Custom reaction devices are available; contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.



Reaction Bars

Air Line Fittings

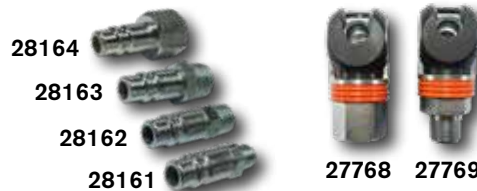

PLUGS

MODEL	DESCRIPTION
28161	1/2" x 1/4" MPT
28162	1/2" x 3/8" MPT
28163	1/2" x 1/2" MPT
28164	1/2" x 1/2" FPT

QUICK-CHANGE COUPLERS

MODEL	DESCRIPTION
27768	1/2" FPT
27769	1/2" MPT



27768 27769

PROTECTIVE COUPLER

MODEL	DESCRIPTION
27771	Vinyl



27771

SWIVEL FITTING

MODEL	CAPACITY
500-SZ	1/2" NPT Swivel Fitting



500-SZ

HIGH TORQUE BATTERY TOOLS

AcraDyne's High Torque Battery Tools provide plenty of power in a compact package. The tool's low weight and ergonomic design ensure excellent mobility, flexibility, and efficiency, even when working in limited spaces. The low-wear brushless synchronous motor is maintenance free, reducing running costs.

FEATURES AND BENEFITS

- Battery driven two-speed torque multiplier for torques from 90 Nm to 4,000 Nm (65 to 2,950 ft-lb)
- Short fastening cycles: Fast gear for run down and power gear for highest torques and precision
- Mobile and always ready for use: Compact design for convenient use in limited spaces
- Efficient operation: Fast and easy gear-changing, great torque range – choose from 22 torque values
- Very low susceptibility to damage and failure: Motor housing made of special polymer that is break-proof, impact-proof, and resistant to corrosion
- Intelligent energy management and faster workflow: Electronics protect battery cells from overcharging and depth discharge



PERQ Advantages

PRODUCTIVITY • Two Lithium-Ion battery packs ensure up to 360 tightenings. Each battery features an LED charge level indicator

ERGONOMICS • Low weight relative to the torque delivered
• Ergonomically designed
• Low noise emissions


RELIABILITY • Low-wear brushless, synchronous motor is maintenance free

QUALITY • Exact shut-off torque even at low battery levels



Each tool comes with two 18 V, 5.2 Ah lithium-ion batteries and a battery charger. Battery and charger are also available to purchase separately.

Battery: ABG-B1852
110V Charger: ABG-C110
220V Charger: ABG-C220

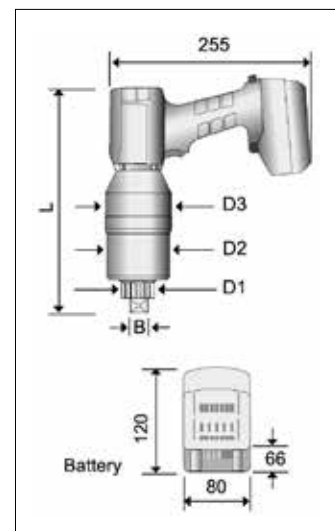

MODEL*	TORQUE RANGE**		SQ. DRIVE IN	DIAMETER			LENGTH		WEIGHT		IDLE SPEED (RPM)	
	NM	FT-LB		D ₁	D ₂	D ₃	IN	MM	LB	KG	1ST GEAR	2ND GEAR
ABG860-KIT	115 - 860	85 - 635	3/4	41 mm / 1.6 in	85 mm / 3.3 in	88 mm / 3.5 in	11.6	295	12.1	5.5	7.0	24.0
ABG1400-KIT	150 - 1,400	110 - 1,030	3/4	41 mm / 1.6 in	85 mm / 3.3 in	88 mm / 3.5 in	11.6	295	12.1	5.5	4.0	13.0
ABG2200-KIT	250 - 2,200	185 - 1,620	1	54 mm / 2.1 in	85 mm / 3.3 in	88 mm / 3.5 in	12.6	320	15.4	7.0	2.0	6.5
ABG2800-KIT	300 - 2,800	220 - 2,065	1	54 mm / 2.1 in	85 mm / 3.3 in	88 mm / 3.5 in	13.6	345	16.3	7.4	1.7	6.0
ABG3200-KIT	360 - 3,200	265 - 2,360	1	72 mm / 2.8 in	93 mm / 3.7 in	97 mm / 3.8 in	14.6	370	16.3	7.4	1.5	5.0
ABG4100-KIT	500 - 4,100	370 - 3,025	1-1/2	72 mm / 2.8 in	93 mm / 3.7 in	97 mm / 3.8 in	14.6	370	20.1	9.1	1.0	4.0

* Each tool comes in a kit, which includes the tool, two 18V / 5.2 Ah Li-ion batteries, and a battery charger.

** When loosening bolts, a higher torque (up to 20%) may be necessary (release torque).

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

AIMCO PULSE TOOLS: OVERVIEW

HOW DOES A PULSE TOOL WORK?

The unique design of a pulse tool, combining motor power and hydraulics, leads to an assembly tool that produces smooth, controlled torque in a series of very fast (2 – 4 ms) events and virtually no torque reaction.

- At free-speed, the entire pulse unit, a sealed cylinder containing hydraulic fluid and an output shaft, rotates at the same speed as the tool motor
- As resistance to rotation increases, the rotation of the output shaft slows, while the rotation of the

cylinder and the hydraulic fluid continues until they approach a seal point within the cylinder

- This seal point produces an increase in fluid pressure and transmits the energy from the rotational mass of the cylinder and fluid to the output shaft, producing torque on the fastener
- After a series of these cycles (pulses), fluid pressure builds to a point that overcomes the limit of a relief valve, allowing pressure to drop and torque to be controlled

TIMELINE

1965

NEW TECHNOLOGY

The first pulse tool prototype was designed in an attempt to provide a tool that would provide torque control without the high maintenance costs of impact wrenches.



1980

U SERIES

Uryu produces the U-series, the first pulse tools to be available commercially for assembly. The U-Series evolves over the next several years to cover torque ranges from 4 – 850 Newton meters and finally, the development of full-shut-off tools. The lack of torque reaction and accurate, repeatable torque makes these tools a manufacturer standard.



1988

EC SERIES

The EC Series (and later the MC Series) combines the advantages of pulse tools with the technology of controlled tools. By incorporating a transducer into the design of the U-Series pulse tool, customers gain the Productivity and Ergonomics of pulse tools and the traceability and control of other transducerized assembly tools. Manufacturers with safety critical applications now have many more options for assembly tools.



2006

UEP-MC SERIES

Uryu does what no other manufacturer can by developing the UEP series, the first and only electric powered pulse tool. The lower speeds, quiet operation, and extremely repeatable torque make the UEP the perfect choice for applications where accuracy and clean operation are critical. By combining programmable tool speed with the MC-style transducer, extremely accurate and repeatable torque is achieved on a variety of applications.



2012

UDP-MC CONTROLLED SERIES

Uryu introduced the UDP-MC controlled series – smaller, lighter electric pulse tools that have an integrated fan unit. The state-of-the-art UECD controller with a built-in driver box eliminates the need for a secondary driver box in the system configuration.



OMEGA PULSE TOOLS: OVERVIEW

BENEFITS OF AIMCO PULSE TOOLS:

Pulse tools offer advantages in all of the PERQ® elements – productivity, ergonomics, reliability and quality.

By partnering with AIMCO, manufacturers can apply the advantages of pulse tools in many ways to reduce production costs and increase profits.

- Productivity – Combining high operating speeds with one-handed operation, AIMCO pulse tools help manufacturers produce at the highest possible rates
- Ergonomics – Light weight, low vibration and no torque reaction make AIMCO pulse tools the safest assembly tools available for threaded assembly
- Reliability – Advances in design and AIMCO's extensive maintenance and training programs add up to years of low cost service from any AIMCO pulse tool
- Quality – AIMCO pulse tools offer the most repeatable torque and clamp load results of any assembly tool, guaranteeing high product quality for manufacturers

1995

ALPHA SERIES

The Alpha-series continued Uryu's advancements in pulse-tool design. In order to achieve the best possible power-to-weight ratio, the Alpha 9-blade, twin chamber air motor is developed. Still unique today, this new motor provides significantly more power, thereby, reducing cycle times and improving torque repeatability. The new Alpha air motor and design changes make the tools smaller and lighter, keeping Uryu at the forefront of pulse tool technology.



2001

ULT / UL SERIES

Continuous innovations and developments include a new O-ring design that improves durability, roller bearings in the pulse unit to increase hydraulic fluid life and redesigned porting helps maintain fluid temperature and torque repeatability. UL tools, with their non-shut off operation, are ideal for applications where the lightest, fastest tool is necessary. Each model features the powerful Alpha air motor and latest in pulse unit design.



2013

UA-AMC CONTROLLED PULSE SERIES

The UA-AMC Series features angle measurement for improved process control. It detects cross threading, double hits on the same fastener, stripped and damaged fastener threads and incorrect fasteners. It also features patented Auto Relief Technology, which modulates the beginning of the torque event, increases pulse frequency, and reduces resistance during the non-pulsing portion of the cycle. This shortens cycle time and increases fluid life.



UAT SERIES

In 2013, Uryu developed and patented the latest innovation in Pulse Tool technology. Auto Relief (PAT) enables efficient delivery of torque energy to the application. Auto Relief responds to ever-changing pressures in the pulse unit, applying its energy in a smooth manner to the joint as the torque is developed. The Auto Relief valve is fully open during free run and automatically closes when torque resistance is sensed. No adjustment required. Benefits include elimination of initial torque spike on hard joints, reduction in oil flow resistance, and maximized performance of the tool.




OMEGA PULSE TOOLS: UAT SERIES

PATENTED AUTO RELIEF TECHNOLOGY:

UAT features patented Auto Relief Technology providing additional control to the application of torque during the pulsing events.



- Auto Relief eliminates initial spike of torque during a cycle. Highly effective on hard joint applications
- Auto Relief ramps up pressure within the pulse unit resulting in more pulses in less time providing a more efficient and even torque event

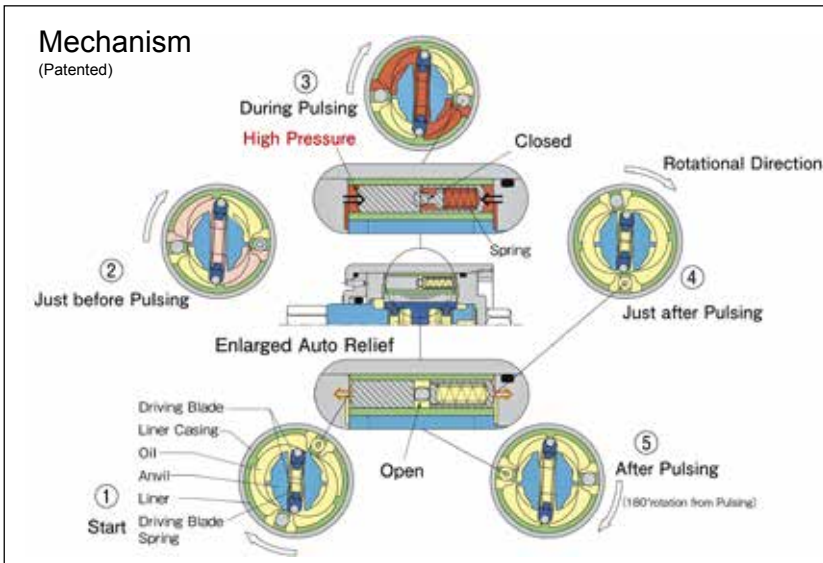


A NEW LEAP FORWARD IN PRODUCTIVITY AND QUALITY:

- Fastening accuracy and time can be improved by as much as 30% depending on application

■ Fastening efficiency comparison (UAT vs ULT)

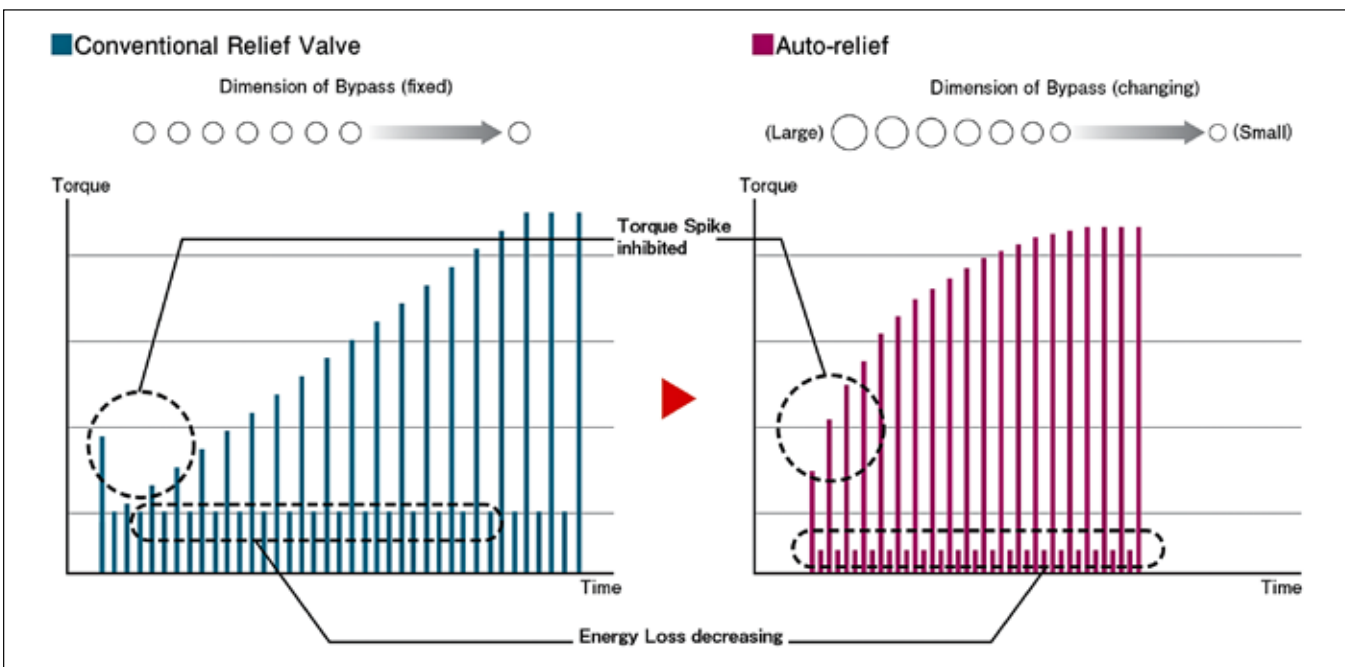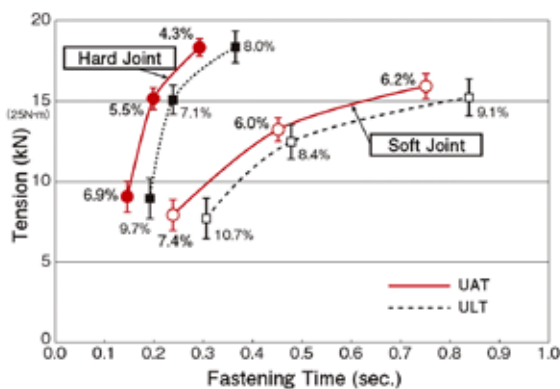

OMEGA PULSE TOOLS: UAT SERIES

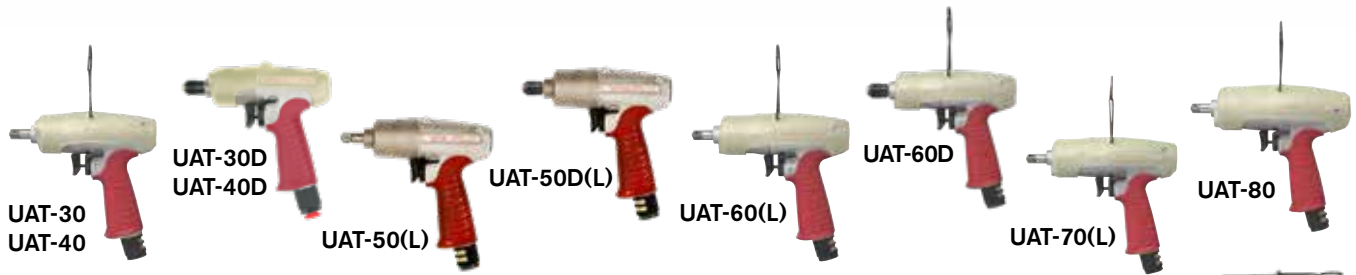

PISTOL SHUT-OFF

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM	TORQUE RANGE FT-LB	WEIGHT LB	WEIGHT KG	OVERALL LENGTH IN	OVERALL LENGTH MM	DRIVE IN	SOUND LEVEL dB(A)	AIR USAGE CFM
UAT-30D	4,200	2.5 - 5.5	1.9 - 4.1	1.9	0.9	6.5	165	1/4	76	10.5
UAT-40	3,800	4.5 - 8	3.3 - 5.9	2.0	0.9	6.4	162	3/8	75	8.8
UAT-40D	3,800	4.5 - 8	3.3 - 5.9	2.0	0.9	6.5	165	1/4	75	8.8
UAT-50	4,600	7 - 15.5	5.2 - 11.5	2.0	0.9	6.4	162	3/8	78	8.8
UAT-50D	4,600	7 - 15.5	5.2 - 11.5	2.0	0.9	6.5	165	1/4	78	8.8
UAT-50L	4,000	7 - 15.5	5.2 - 11.5	2.0	0.9	6.4	162	3/8	75	8.8
UAT-50DL	4,000	7 - 15.5	5.2 - 11.5	2.0	0.9	6.5	165	1/4	75	8.8
UAT-60	6,700	15 - 32	11.1 - 23.7	2.1	1.0	6.8	174	3/8	80	12.3
UAT-60D	6,700	15 - 32	11.1 - 23.7	2.1	1.0	7.0	177	1/4	80	12.3
UAT-60L	6,000	13 - 28	9.6 - 20.7	2.1	1.0	6.8	174	3/8	77	8.8
UAT-70	6,000	30 - 55	22.2 - 40.7	2.3	1.1	7.1	180	3/8	80	14.0
UAT-70L	5,300	25 - 48	18.5 - 35.5	2.3	1.1	7.1	180	3/8	78	10.5
UAT-80	5,600	45 - 63	33.3 - 46.6	2.8	1.3	7.3	186	3/8	80	16.8
UAT-90	5,700	50 - 85	37.0 - 62.9	3.2	1.5	7.6	192	1/2	82	18.6
UAT-90L	5,100	45 - 75	33.3 - 55.5	3.2	1.5	7.6	192	1/2	79	15.8
UAT-100	5,200	70 - 130	51.8 - 96.2	3.7	1.7	7.8	199	1/2	82	19.3
UAT-100L	5,200	60 - 110	44.4 - 81.4	3.7	1.7	7.8	199	1/2	79	16.8
UAT-130	4,500	110 - 150	81.4 - 111	5.1	2.3	8.5	217	1/2	82	24.6
UAT-150	3,900	140 - 210	103.6 - 155.4	6.4	2.9	9.5	240	3/4	82	24.6
UAT-180	3,300	160 - 250	118.4 - 185	8.1	3.7	10.5	264	3/4	84	24.6
UAT-200	2,400	200 - 400	148 - 296	12.8	5.8	11.0	279	3/4	85	35.2
UAT-200L	2,400	170 - 280	125.8 - 207.2	12.8	5.8	11.0	279	3/4	85	24.6



Air Hose Size: 1/4" ID for UAT-30D to UAT-50, 3/8" ID for UAT-60 to UAT-100, 1/2" ID for UAT-100L to UAT-200L

Air Inlet Thread: 1/4" NPT for UAT-30D to UAT-150

Note Torque Ranges reflect residual B joint torque values

3/8" NPT for UAT-180 to UAT-200L

UAT Models containing "L" indicate models designed to run at 57 PSI air pressure.

UAT Models containing "D" indicate 1/4" quick change bit holder

Most models can be equipped with TM (Tightening Monitor) feature for use with qualifier systems. Order TM tools by adding "TM" to model number (for example, UAT-60 becomes UAT-60TM).



INLINE SHUT-OFF

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM	TORQUE RANGE FT-LB	WEIGHT LB	WEIGHT KG	OVERALL LENGTH IN	OVERALL LENGTH MM	DRIVE IN	SOUND LEVEL dB(A)	AIR USAGE CFM
UAT-30SD	3,400	2.5 - 5.5	1.9 - 4.1	1.9	0.8	8.7	222	1/4	68	12.3
UAT-40S	3,300	4.5 - 8.0	3.3 - 5.9	1.9	0.9	8.8	224	3/8	70	7.0
UAT-40SD	3,300	4.5 - 8.0	3.3 - 5.9	1.9	0.9	8.9	227	1/4	70	7.0
UAT-50S	3,900	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.8	224	3/8	78	8.8
UAT-50SD	3,900	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.9	227	1/4	78	8.8
UAT-50SL	3,800	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.8	224	3/8	75	7.0
UAT-50SDL	3,800	7.0 - 15.5	5.2 - 11.5	1.9	0.9	8.9	227	1/4	75	7.0
UAT-60S	5,700	15.0 - 32.0	11.1 - 23.7	1.9	0.9	9.0	229	3/8	80	10.5
UAT-60SD	5,700	15.0 - 32.0	11.1 - 23.7	1.9	0.9	9.1	232	1/4	80	10.5
UAT-60SL	5,300	13.0 - 28.0	9.6 - 20.7	1.9	0.9	9.0	229	3/8	77	8.8
UAT-60SDL	5,300	13.0 - 28.0	9.6 - 20.7	1.9	0.9	9.1	232	1/4	77	8.8
UAT-70S	4,700	30.0 - 50.0	22.2 - 37.0	2.1	1.0	9.4	239	3/8	80	12.3
UAT-70SL	4,400	25.0 - 45.0	18.5 - 33.3	2.1	1.0	9.4	239	3/8	78	9.5

Air Hose Size: 1/4" ID for UAT-30 to UAT-50, 3/8" ID for UAT-60 to UAT-70

Air Inlet Thread: 1/4" NPT for UAT-30 to UAT-70

Note Torque Ranges reflect residual B joint torque values

UAT Models containing "D" indicate 1/4" quick change bit holder

UAT Models containing "L" indicate models designed to run at 57 PSI air pressure.

Most models can be equipped with TM (Tightening Monitor) feature for use with qualifier systems. Order TM tools by adding "TM" to model number (for example, UAT-60 becomes UAT-60TM).

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

OMEGA PULSE TOOLS: UL SERIES


OMEGA UL SERIES

Whether the goal is improving productivity, ergonomics, reliability, or quality, the UL Series contains the technology to achieve success.

FEATURES AND BENEFITS

- Models available from 6 – 230 Nm (4.4 – 170 Ft-lb)
- Available in Standard, Tightening Monitor, and Transducerized versions
- High power-to-weight ratio
- Reduced maintenance and extended service life
- Environmentally friendly design
- Accurate and repeatable

Omega Series Pulse Unit

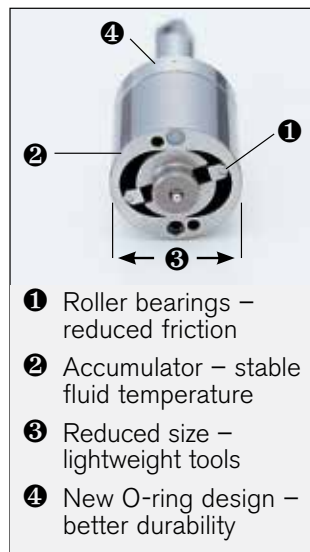

UL SERIES PISTOL NON SHUT-OFF

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL	AIR USAGE
	RPM	NM	FT-LB	LB	KG	IN	MM	IN	dB(A)	CFM
UL-30D	5,700	6 - 12	4.4 - 8.9	1.5	0.7	5.4	137	1/4 hex	75	7.0
UL-30	5,700	6 - 12	4.4 - 8.9	1.5	0.7	5.2	133	3/8 sq.	75	7.0
UL-40D	6,100	11 - 20	8.1 - 14.8	1.5	0.7	5.4	137	1/4 hex	75	7.0
UL-40	6,100	13 - 22	9.6 - 16.3	1.5	0.7	5.2	133	3/8 sq.	75	7.0
UL-50D	6,400	18 - 28	13.3 - 20.7	1.7	0.8	5.8	146	1/4 hex	78	10.5
UL-50	6,400	22 - 35	16.3 - 25.9	1.7	0.8	5.5	140	3/8 sq.	78	10.5
UL-60D	7,000	22 - 35	16.3 - 25.9	1.8	0.8	5.6	143	1/4 sq.	80	14.0
UL-60	7,000	32 - 50	23.7 - 37.0	1.8	0.8	5.5	140	3/8 sq.	80	14.0
UL-70	5,700	40 - 65	29.6 - 48.1	2.1	1.0	6.0	153	3/8 sq.	80	15.8
UL-80	5,900	45 - 70	33.3 - 50.0	2.5	1.1	6.4	162	3/8 sq.	80	16.8
UL-90	6,000	60 - 100	44.4 - 74.0	2.9	1.3	6.7	170	1/2 sq.	82	18.6
UL-100	5,400	80 - 130	59.2 - 96.2	3.7	1.7	7.0	177	1/2 sq.	80	20.3
UL-130	4,400	100 - 160	74.0 - 118.4	5.1	2.3	7.8	197	1/2 sq.	83	22.7
UL-150	3,800	150 - 230	109.9 - 169.6	6.6	3.0	8.4	213	3/4 sq.	84	24.7



UL SERIES INLINE NON SHUT-OFF

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL	AIR USAGE
	RPM	NM	FT-LB	LB	KG	IN	MM	IN	dB(A)	CFM
UL-30SD	5,000	6 - 12	4.4 - 8.9	1.4	0.6	8.2	209	1/4 hex	75	8.1
UL-30S	5,000	6 - 12	4.4 - 8.9	1.4	0.6	8.1	205	3/8 sq.	72	8.1
UL-40SD	5,000	9 - 20	6.7 - 14.8	1.4	0.6	8.2	209	1/4 hex	75	8.1
UL-40S	5,000	11 - 22	8.1 - 16.3	1.4	0.6	8.1	205	3/8 sq.	72	8.1
UL-50SD	6,400	18 - 28	13.3 - 20.7	1.6	0.7	8.4	214	1/4 hex	78	12.3
UL-50S	6,400	22 - 35	16.3 - 25.9	1.6	0.7	8.2	208	3/8 sq.	78	12.3
UL-60SD	6,700	22 - 35	16.3 - 25.9	1.7	0.8	8.3	212	1/4 hex	80	15.8
UL-60S	6,700	32 - 50	23.7 - 37.0	1.7	0.8	8.2	209	3/8 sq.	80	15.8
UL-70S	5,400	36 - 60	26.6 - 44.4	1.9	0.9	8.8	223	3/8 sq.	84	14.0

Air Hose Size: 1/4 I.D. for UL-30 (D/SD) - UL-50 (D/SD) - 3/8" I.D. for UL-60 (D/SD) - UL-150 (D/SD)


Air Inlet: N.P.T. 1/4

NOTE: Torque ranges reflect residual B joint torque values

All pulse tools ending in "D" include a 1/4" Hex quick-change bit holder.

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

OMEGA PULSE / ACRA-PULSE SERIES

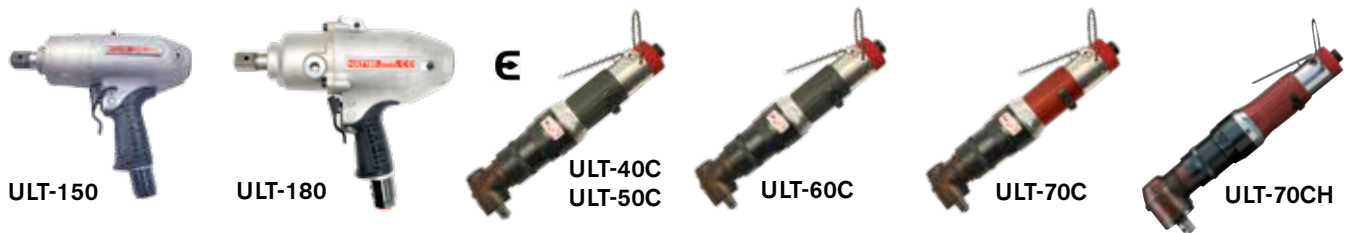

OMEGA PULSE ULT SERIES PISTOL / ANGLE SHUT-OFF

MODEL	FREE SPEED	TORQUE RANGE		WEIGHT		OVERALL LENGTH		DRIVE	SOUND LEVEL	AIR USAGE
	RPM	NM	FT-LB	LB	KG	IN	MM	IN	dB(A)	CFM
PISTOL										
ULT-150	3,700	140 - 210	104 - 155	6.4	2.9	9.5	240	3/4" Sq. Dr.	82	24.7
ULT-180	3,300	160 - 250	118 - 185	8.1	3.7	10.4	264	3/4" Sq. Dr.	82	24.7
ANGLE										
ULT-40C	3,500	4.5 - 7.5	3.3 - 5.6	2.9	1.30	9.8	250	3/8" Sq. Dr.	70	7.0
ULT-50C	4,500	7.0 - 15.5	5.2 - 11.5	3.0	1.35	9.8	250	3/8" Sq. Dr.	78	8.6
ULT-60C	5,200	13 - 28	9.6 - 20.7	3.2	1.45	10.3	261	3/8" Sq. Dr.	80	10.5
ULT-70C	4,400	20 - 35	14.8 - 25.9	3.6	1.65	10.8	275	3/8" Sq. Dr.	82	12.3
ULT-70CH	2,500	30 - 50	22.2 - 37.0	4.1	1.85	11.4	290	1/2" Sq. Dr.	82	12.3

"L" following model number denotes Low Air Pressure type

"H" within model number denotes High Torque type

NOTE: Torque ranges reflect residual B joint torque values



ACRA-PULSE PISTOL / INLINE SHUT-OFF 3/8" - 1/2" DRIVE

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED	TORQUE RANGE		OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DRIVE	NOISE LEVEL	AIR USAGE
	RPM	NM	FT-LB	MM	IN	LB	KG	MM	IN	IN	dB(A)	CFM
PISTOL 3/8" - 1/2" DRIVE												
UX-T700L*	7,500	13 - 26	10 - 19	187	7.4	3.2	1.5	25.5	1.0	3/8	72	10.5
PISTOL 3/4" - 1" DRIVE												
UXR-T1820	4,400	150 - 250	110 - 180	270	10.6	9.9	4.5	42.0	1.7	3/4	84	24.7
UXR-T2000	4,000	200 - 400	150 - 290	303	11.9	15.0	6.8	47.0	1.8	3/4	85	34.0
INLINE												
UXR-T2400S*	3,600	360 - 650	260 - 470	444	17.5	26.5	12.0	61.5	2.4	1	85	35.3
UXR-T3000S	4,400	450 - 850	330 - 620	477	18.8	32.0	14.5	62.0	2.4	1	85	37.1

Air Hose Size: 3/8" I.D. 1/2" I.D. for UXR-T1820 - UXR-T3000S

Air Inlet: N.P.T. 1/4" 3/8" for UXR-T1820 & UXR-T2000 1/2" for UXR-T2400S & UXR-T3000S

NOTE: Torque ranges reflect residual B joint torque values

Inside Trigger Standard (UXR-T2400S - UXR-T3000S)

* UX-T700L and UXR-T2400S models can be equipped with a TM (Tightening Monitor) feature for use with qualifier systems. Order TM tools by adding "TM" to model number (for example, UX-T700L becomes UX-T700LTM).

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRA-PULSE SERIES



U-350D



UX-450D



UX-500D



UX-612D

PISTOL NON SHUT-OFF 1/4" HEX DRIVE

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	OVERALL LENGTH MM IN	WEIGHT LB KG	FROM CENTER TO OUTSIDE MM IN	NOISE LEVEL dB(A)	AIR USAGE CFM
U-350D	10,500	3.5 - 5.8 2.5 - 4.2	154 6.1	1.7 0.8	22.0 0.9	74	5.3
UX-450D	9,500	8 - 14 5.8 - 10	152 6.0	1.9 0.9	22.0 0.9	<70	7.0
UX-500D	9,300	13 - 20 10 - 15	152 6.0	1.9 0.9	22.0 0.9	70	8.8
UX-612D	9,300	16 - 28 12 - 20	165 6.5	2.1 1.0	22.5 0.9	75	11.2

Air Hose Size: 1/4" I.D. for U-350D - UX-500D - 3/8" I.D. for UX-612D
All Tools Standard with 1/4" Quick Change Chuck

Air Inlet Thread: N.P.T. 1/4"

NOTE: Torque ranges reflect residual B joint torque values



UX-450



UX-500



UX-612



UX-700



UX-800



UX-900
UX-1000



UX-1300



UX-1400

PISTOL NON SHUT-OFF 3/8" - 1/2" DRIVE

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	OVERALL LENGTH MM IN	WEIGHT LB KG	FROM CENTER TO OUTSIDE MM IN	SQ. DRIVE IN	NOISE LEVEL dB(A)	AIR USAGE CFM
UX-450	9,500	9 - 15 6.5 - 11	147 5.8	1.9 0.9	22.0 0.9	3/8	65	7.0
UX-500	9,300	15 - 25 11 - 19	147 5.8	1.9 0.9	22.0 0.9	3/8	70	8.8
UX-612	9,300	20 - 35 15 - 25	160 6.3	2.1 1.0	22.5 0.9	3/8	75	11.2
UX-700	9,000	25 - 45 20 - 35	169 6.7	3.0 1.4	25.5 1.0	3/8	73	12.3
UX-800	9,000	35 - 60 25 - 45	175 6.9	3.7 1.7	28.0 1.1	3/8	73	14.1
UX-900	7,600	45 - 75 35 - 55	181 7.1	4.1 1.9	30.0 1.2	1/2	75	14.7
UX-1000	6,800	50 - 95 40 - 70	187 7.4	4.8 2.2	33.0 1.3	1/2	75	17.9
UX-1300	6,200	80 - 130 60 - 95	205 8.1	5.9 2.7	36.0 1.4	1/2	76	19.4
UX-1400	5,300	100 - 160 75 - 120	224 8.8	7.0 3.2	40.0 1.6	1/2	78	21.1

Air Hose Size: 1/4" I.D. for UX-410 - UX-500 - 3/8" I.D. for UX-612 - UX-1400

Air Inlet: N.P.T. 1/4"

NOTE: Torque ranges reflect residual B joint torque values



UX-1620



UXR-1820



UXR-2000

PISTOL NON SHUT-OFF 3/4" - 1" DRIVE

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	OVERALL LENGTH MM IN	WEIGHT LB KG	FROM CENTER TO OUTSIDE MM IN	SQ. DRIVE IN	NOISE LEVEL dB(A)	AIR USAGE CFM
UX-1620	5,000	120 - 190 90.0 - 140.0	241 9.5	7.9 3.6	40.0 1.6	3/4	82	22.9
UXR-1820	4,600	160 - 250 120.0 - 185.0	242 9.5	9.0 4.1	42.0 1.7	3/4	84	26.3
UXR-2000	4,200	300 - 450 220.0 - 330.0	282 11.1	14.3 6.5	47.0 1.8	3/4	85	31.5

Air Hose Size: 3/8" I.D. for UX-1620 1/2" I.D. for UXR-1820

Air Inlet: N.P.T. 1/4" for UX-1620 N.P.T. 3/8" for UXR-1820, UXR-2000

NOTE: Torque ranges reflect residual B joint torque values Torque Control in Left-Hand Rotation Available for UXR-2000

AUTO REVERSING

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	OVERALL LENGTH MM IN	WEIGHT LB KG	FROM CENTER TO OUTSIDE MM IN	NOISE LEVEL dB(A)	AIR USAGE CFM
UX-ST800	7,300	35 - 55 25 - 40	195 7.7	3.8 1.8	28.0 1.1	75	10.5

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Torque ranges reflect residual B joint torque values



UX-ST800

* logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

ACRA-PULSE SERIES

1/4" Hex Drive



3/8" Sq. Drive



1/2" Sq. Drive



3/4"-1" Sq. Drive



INLINE NON SHUT-OFF

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	OVERALL LENGTH MM IN	WEIGHT LB KG	FROM CENTER TO OUTSIDE MM IN	NOISE LEVEL dB(A)	AIR USAGE CFM	AIR HOSE SIZE (I.D.)
1/4" Hex Drive (Tools Come Standard with 1/4" Quick Change Chuck)								
U-310SD	11,000	2.5 - 3.1 1.8 - 2.2	222 8.7	1.5 0.6	18.0 0.7	74	5.3	1/4"
U-350SD	10,500	3.5 - 5.8 2.5 - 4.2	238 9.4	1.5 0.7	22.0 0.7	74	5.3	1/4"
U-410SD	10,500	7 - 10 5.0 - 7.2	240 9.5	1.8 0.8	22.0 0.9	70	5.3	1/4"
UX-450SD	9,500	8 - 14 5.8 - 10	239 9.4	1.8 0.8	22.0 0.9	<70	7.0	1/4"
UX-500SD	9,300	13 - 20 10 - 15	244 9.5	2.0 0.9	22.0 0.9	70	8.8	1/4"
UX-612SD	9,300	16 - 28 12 - 20	253 10.0	2.2 1.0	23.3 0.9	75	11.1	3/8"
UX-700SD	9,000	20 - 36 16 - 28	249 9.8	2.8 1.3	26.5 1.0	78	12.3	3/8"
3/8" Sq. Drive								
U-410S	10,500	7 - 10 5.0 - 7.2	239 9.4	1.8 0.8	22.0 0.9	70	5.3	1/4"
UX-450S	9,500	9 - 15 6.5 - 11	234 9.2	1.8 0.8	22.0 0.9	<70	7.0	1/4"
UX-500S	9,300	15 - 25 11 - 19	239 9.4	2.0 0.9	22.0 0.9	70	8.8	1/4"
UX-612S	9,300	20 - 35 15 - 25	248 9.8	2.2 1.0	23.3 0.9	75	11.1	3/8"
UX-700S	9,000	25 - 45 20 - 35	244 9.5	2.8 1.3	26.5 1.0	78	12.3	3/8"
UX-800S	9,000	35 - 60 25 - 45	250 9.8	3.2 1.5	35.5 1.0	75	14.2	3/8"
1/2" Sq. Drive								
UX-900S	7,600	45 - 75 35 - 55	310 12.2	3.9 1.8	37.5 1.1	75	14.9	3/8"
UX-1000S	6,800	50 - 95 40 - 70	320 12.6	4.6 2.1	39.0 1.1	75	17.9	3/8"
UX-1300S	6,200	80 - 130 60 - 95	336 13.2	6.6 2.6	42.0 1.3	77	19.4	3/8"
3/4" Drive								
UXR-2000S*	4,200	300 - 450 220 - 330	340 13.4	15.4 7.0	47.0 1.8	85	31.6	1/2"
1" Sq. Drive								
UXR-2400S*	4,000	400 - 650 290 - 470	385 15.2	23.7 11.0	55.0 2.1	85	35.2	1/2"
UXR-3000S*	4,400	500 - 850 360 - 630	455 17.9	29.3 13.3	62.0 2.1	85	37.1	1/2"

Air Inlet N.P.T.: 1/4" 3/8" for UXR-2000S 1/2" for UXR-2400S and UXR-3000S

*Torque control in left-hand rotation available

NOTE: Torque ranges reflect residual B joint torque values



ANGLE 3/8" - 1/2" DRIVE

Recommended Air Pressure: 85 psi

MODEL	FREE SPEED RPM	TORQUE RANGE NM FT-LB	WEIGHT LB KG	OVERALL LENGTH MM IN	SQ. DRIVE IN	NOISE LEVEL dB(A)	AIR USAGE CFM
ALPHA-70C	6,300	28 - 45 20.2 - 32.5	3.9 1.8	266 10.5	3/8	82	15.8
ALPHA-70CH	3,600	50 - 76 36.1 - 56.0	4.4 2.0	282 11.1	1/2	82	15.8
UX-500C	9,300	13 - 20 10.0 - 15.0	2.8 1.3	270 10.6	3/8	82	8.8
UX-612C	9,800	16 - 28 12.0 - 20.0	3.0 1.4	283 11.1	3/8	85	11.2
UX-700C	9,500	20 - 36 16.0 - 28.0	3.7 1.7	273 10.8	3/8	85	12.3
UX-800C	9,000	29 - 43 20.0 - 31.0	4.3 1.9	285 11.2	3/8	85	14.1
UX-1000C	6,800	50 - 80 40.0 - 58.0	6.8 3.1	365 14.4	1/2	90	17.9

Air Hose Size: 1/4" I.D. for UX-500C - 3/8" I.D. for ALPHA-70C, ALPHA-70CH, UX-612C - UX-1000C

Air Inlet: N.P.T. 1/4"

NOTE: Torque ranges reflect residual B joint torque values

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

Visit our website www.aimco-global.com

BP-T PULSE SERIES CORDLESS TOOLS

“Operator First” design means a lighter-weight, ergonomic pulse tool

FEATURES AND BENEFITS

- Direct Power Train and High-Efficiency Brushless Electric Motor deliver reduced noise and vibration
- Hydraulic Impulse Unit delivers reaction-free tightening
- Cooling fan improves heat management, increasing duty cycle up to 20% over the UDBP-TA series
- High-capacity Li-Ion battery pack provides up to 20% more fastener runs per charge than the UDBP-TA series
- The Ergonomic Handle coupled with a Compact Design provides an improved user experience



MODEL*	CAPACITY (NOMINAL BOLT SIZE)		TORQUE RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT W/O SOCKET BIT				FROM CENTER TO OUTSIDE		SQ. DR OR HEX SIZE		SOUND LEVEL dB(A)	BATTERY VOLTAGE (CAPACITY)
	MM	IN	NM	FT-LB		MM	IN	W/BATTERY KG	LB	W/OUT BATTERY KG	LB	MM	IN	MM	IN		
BP-T40-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	197	7.8	1.4	3.08	1.15	2.53	27	1.1	9.5 Hex	3/8 Sq.	75	10.8V (2.0Ah)
BP-T40D-(B)(KIT)	5	No. 10	4.5-8	3.3-5.9	3,300	200	7.9	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	75	10.8V (2.0Ah)
BP-T50-(B)(KIT)	6-8	1/4-5/16	7-15	5.1-11.1	3,900	197	7.8	1.4	3.08	1.15	2.53	27	1.1	9.5 Sq.	3/8 Sq.	76	10.8V (2.0Ah)
BP-T50D-(B)(KIT)	6-8	1/4-5/16	6.5-13	4.8-9.6	3,900	200	7.9	1.4	3.08	1.15	2.53	27	1.1	6.35 Hex	1/4 Hex	76	10.8V (2.0Ah)
BP-T60-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	202	8.0	1.6	3.52	1.25	2.75	27	1.1	9.5 Sq.	3/8 Sq.	76	14.4V (2.0Ah)
BP-T60D-(B)(KIT)	8	5/16	13-26	9.6-19.2	4,800	205	8.1	1.6	3.52	1.25	2.75	27	1.1	6.35 Hex	1/4 Hex	77	14.4V (2.0Ah)

* Base models come with no battery. Batteries are available separately or in tool/kits combinations.

Add "B" to end of the model number to order 1 tool with 1 battery.

Add "KIT" to the end of the model number to order a tool kit, which includes 1 tool, 2 batteries, and 1 battery charger.



**10.8 V Battery:
EYFB32**



**14.4 V Battery:
EYFB41**



Battery Charger: EY0L82B

BATTERIES AND BATTERY CHARGER

BATTERY					
MODEL #	DESCRIPTION		VOLTAGE	TYPE	CAPACITY
EYFB32	Battery for BP-T40, BP-T40D, BP-T50, and BP-T50D		10.8V	Li-Ion	2.0Ah
EYFB41	Battery for BP-T60 and BP-T60D		14.4V	Li-Ion	2.0Ah
CHARGER					
MODEL #	DESCRIPTION	WEIGHT	INPUT VOLTAGE	DIMENSIONS	BATTERY CAPACITY
EY0L82B	Li-Ion battery charger	0.93 kg (2.0 lbs)	120VAC	9.3" D x 7.1" W x 3.6" H	3.0 - 4.2Ah

BODY JACKET



**10C-840-1
for BP-T40/BP-T50 Series**

**10E-840-1
for BP-T60 Series**

* **E** logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

UDBP-TA PULSE SERIES CORDLESS TOOLS

***Cordless pulse tool combines industry-leading pulse technology
with Lithium-Ion battery power***

FEATURES AND BENEFITS

- Uryu Direct Battery Pulse (UDBP) design connects the pulse unit directly to the motor – no reduction gearing – resulting in a tool with less noise and vibration
- Brushless Internal Permanent Magnet (IPM) motor provides longer motor life and more efficiency allowing more fastening cycles per battery charge
- Auto Relief Technology provides additional control to the application of torque during the pulsing events
- On board LEDs for application illumination
- Li-Ion battery provides more power and ends the “battery-memory” issues of NiCd batteries
- RF Types transmit “good” signal to receiver (sold separately) over 426 Mhz
- “Good” signal can be used for Poka-Yoke or Bolt Counting



UDBP-TA70(P)

MODEL*	TYPE	FREE SPEED RPM	TORQUE RANGE NM	FT-LB	WEIGHT W/ BATTERY KG	LB	LENGTH MM	IN	DRIVE IN	SOUND LEVEL dB(A)	VOLTAGE V	BATTERY	CHARGER
UDBP-TA70(P)	Shut-off	4,800	26 - 47	19.2 - 34.7	2.0	4.4	234	9.2	3/8 sq.	76	33.3	UB333Li	UBC
UDBP-TA70(P)-RF	Shut-off with wireless RF transmission	4,800	26 - 47	19.2 - 34.7	2.0	4.4	234	9.2	3/8 sq.	76	33.3	UB333Li	UBC

* (P) Designates 3/8" square drive anvil with socket retainer pin. Tools with no (P) suffix have a quick-change driver anvil.

NOTE: Torque ranges reflect residual B joint torque values.

- Use part number **UDBP-TA70(P)-B** for a kit that includes 1 standard shut-off tool and 1 battery.
- Use part number **UDBP-TA70(P)-KIT** for a kit that includes 1 standard shut-off tool, 2 batteries, and 1 charger.
- Use part number **UDBP-TA70(P)-RF-B** for a kit that includes 1 RF shut-off tool and 1 battery. Use part number **UDBP-TA70(P)-RF-KIT** for a kit that includes 1 standard shut-off tool, 2 batteries, and 1 charger.
- Use part number **UDBP-TA70(P)-RF-KTR** for a kit that includes 1 RF shut-off tool, 2 batteries, 1 charger, and 1 receiver.

ACCESSORIES FOR UDBP SERIES



Battery: UB333Li



Charger: UBC



Battery Cover:
863-978-1



Body Jacket:
863-966-1



RF Receiver:
TWF-600R

MODEL	DESCRIPTION
UB333Li	Lithium-Ion battery
UBC	Battery charger. Charge Time: 80% battery capacity - 40 minutes, 100% battery capacity - 64 minutes.
863-966-1	Body jacket for UDBP TA70 series
863-978-1	Battery Cover for UDBP 70 Series
TWF-600R	Receiver for UDBP (RF) type tools 426 Mhz (sold separately)

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.

Visit our website www.aimco-global.com

UDP-TA SERIES

DIRECT PLUG IN, SHUT OFF PULSE TOOLS

FEATURES AND BENEFITS

- Direct Wall Plug in – Tool plugs directly to 100 – 115 VAC wall power with circuit protection breaker box or integrated power cable balancer
- Brushless (IPM) Motor provides long motor life with integrated trigger activated fan for increased duty cycle
- Patented Auto Relief Pulse Unit Technology
- Lightweight, high impact, rugged plastic housing for superior ergonomics
- Optional power cable integrated balancer available



UDP-TA40(B)



UDP-TA50D(B-TL)

MODEL	TORQUE RANGE		RPM FREE SPEED	OVERALL LENGTH		WEIGHT		DRIVE
	NM	FT-LB		IN	MM	LB	KG	
Bottom Cable Exit Models (denoted by B)								
UDP-TA40 (B)	4.5 - 8.0	3.3 - 5.9	3,300	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA40D (B)	4.5 - 8.0	3.3 - 5.9	3,300	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA50 (B)	7.0 - 15.5	5.2 - 11.5	3,900	7.1	179.5	3.0	1.4	3/8 Sq.
UDP-TA50D (B)	7.0 - 15.5	5.2 - 11.5	3,900	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA55 (B)	12.5 - 25.0	9.3 - 18.5	4,800	7.3	184.5	3.0	1.4	3/8" Sq.

Top Cable Exit Models (denoted by (B-TL))

UDP-TA40 (B-TL)	4.5 - 8.0	3.3 - 5.9	3,300	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA40D (B-TL)	4.5 - 8.0	3.3 - 5.9	3,300	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA50 (B-TL)	7.0 - 15.5	5.2 - 11.5	3,900	7.1	179.5	3.0	1.4	3/8" Sq.
UDP-TA50D (B-TL)	7.0 - 15.5	5.2 - 11.5	3,900	7.2	182.5	3.0	1.4	1/4" Hex
UDP-TA55 (B-TL)	12.5 - 25.0	9.3 - 18.5	4,800	7.3	184.5	3.0	1.4	3/8" Sq.

OPTIONAL ACCESSORIES

MODEL	DESCRIPTION
UCB-25	Power Cable Balancer
UCB-TA-CBL	110VAC Wall-to-Breaker Power Cable
910-629-0	Breaker Unit
910-618-0	5M UDP Tool to Breaker Cable
910-619-0	10M UDP Tool to Breaker Cable
910-627-0	5M UDP Extension Cable*

* Extension Cables connect between Tool and Breaker Cables



UCB-25
Power Cable
Balancer



910-619-0
10M Tool-to-Breaker Cable




910-629-0 Breaker Unit
UCB-TA-CBL Wall-to-Breaker
Power Cable

UAN & URW SERIES NUTRUNNERS

UAN SERIES ANGLE NUTRUNNERS

Designed for fastening in tight quarters or applications not served well by a pulse tool. The UAN Series transfers torque through beveled angle gears, continuously driving the fastener. When the resistance to rotation overcomes the spring resistance on the clutch, the tool will disengage at the adjusted torque value. Low reaction force characteristics on hard joints make it comfortable for the operator to use. Ideal for applications ranging from 6 – 60 Nm (4 – 44 ft-lb).

- Torque Control
- Electronically Monitored or Controlled type

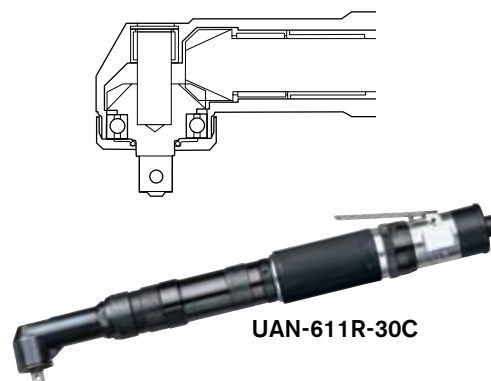

UAN-611R-30C

ANGLE/INLINE TORQUE CONTROL UAN SERIES

Recommended Air Pressure: 85 psi


MODEL	TORQUE RANGE		FREE SPEED	OVERALL LENGTH		ANGLE HEAD HEIGHT		FROM CENTER TO OUTSIDE		WEIGHT LESS SOCKET		SQUARE DRIVE	NOISE LEVEL	AIR USAGE
	NM	FT-LB	RPM	MM	IN	MM	IN	MM	IN	KG	LB	IN	dB(A)	CFM
ANGLE														
UAN-611R-60C	6.5 - 12.0	4.3 - 8.6	620	383	15.1	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-50C	8.5 - 15.0	5.7 - 10.8	470	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-40C	10.0 - 18.0	7.2 - 12.9	400	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-611R-30C	13.0 - 25.0	9.3 - 18.0	270	373	14.7	47	1.9	14.0	0.5	1.6	3.5	3/8	80	21.2
UAN-701R-60C	20.0 - 31.0	14.5 - 23.1	600	445	17.5	47	1.9	14.0	0.5	2.4	5.3	3/8	85	31.8
UAN-701R-40C	28.0 - 45.0	21.0 - 33.3	400	455	17.9	51	2.0	18.0	0.7	2.4	5.3	3/8	85	31.8
UAN-701R-30C	37.0 - 60.0	27.5 - 44.1	300	455	17.9	58	2.3	18.0	0.7	2.4	5.3	1/2	85	31.8

Air Hose Size: 3/8 I.D.

Air Inlet: N.P.T. 1/4

URW SERIES IN-LINE RATCHET WRENCHES

Designed to set flush over the fastener head, the URW Series is ideal for narrow fastening spaces. Motor torque is transferred from a gear driven, dual lobed cam that pushes a spring loaded push rod, rotating the socket one tooth at a time. A wide variety of socket sizes, head thicknesses, and tool lengths allow the URW Series access to many difficult applications.

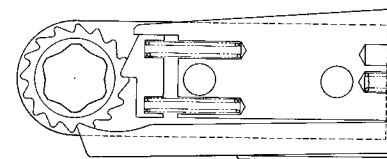

URW-8

URW-9N

URW-10N

URW-12N

URW SERIES RATCHET WRENCHES

Recommended Air Pressure: 85 psi

MODEL	MAX TORQUE		FREE SPEED	OVERALL LENGTH		WEIGHT		MIN/MAX HEX SOCKET SIZE		AIR USAGE
	NM	FT-LB	RPM	MM	IN	LB	KG	MM	IN	CFM
STRAIGHT HEAD										
URW-6	11	8.1	210	292	11.5	2.5	1.2	6 - 12	1/4 - 7/16	9.9
URW-8N	16	11.8	260	300	11.8	4.2	1.9	7 - 15	7/16 - 9/16	19.5
URW-8	16	11.8	240	360	14.2	5.0	2.3	7 - 15	7/16 - 9/16	19.8
URW-9N	31	22.9	140	380	15.0	5.2	2.4	7 - 15	7/16 - 9/16	23.7
URW-10N	57	42.2	155	394	15.5	5.8	2.7	10 - 19	9/16 - 3/4	25.0
URW-12N	59	43.7	145	397	15.6	5.9	2.7	12 - 23	3/8 - 13/16	25.0

Air Hose Size: 3/8 I.D.


Air Inlet: N.P.T. 1/4

TUBENUT & GEARED NUTRUNNERS

UOW SERIES OPEN-END NUTRUNNERS

Designed for tubenut fastening, the UOW Series can transfer torque through a variety of options.

- Stall Type – Depending on the application requirements, the standard UOW Series will stall when torque resistance matches power output
- Mechanical Shut-off Type – For greater torque accuracy and less reaction impulse to the operator, the UOW-T Series incorporates a mechanical clutch to shut off the tool at the preset torque
- Electronically Monitored Type – For critical torque applications requiring monitoring or controlling of the fastening torque, the UOW-M Series utilizes a transducer to signal the clutch shut-off
- UOW series incorporates a one-hand, two-step throttle, which automatically reverses the socket to a preset open position

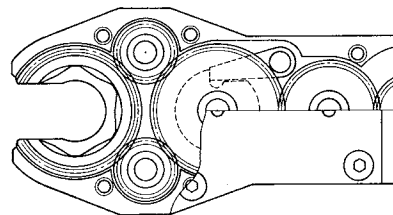

UOW-11-10



UOW-11-14



UOW-11-22



UOW-11-30



UOW-T60-22



UGW-8N

UOW/UOW-T SERIES TUBENUT WRENCHES

Recommended Air Pressure: 85 psi


MODEL	MAX TORQUE/RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT		MIN/MAX HEX SOCKET SIZE		NOISE LEVEL	AIR USAGE
	NM	FT-LB	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
STALL											
UOW-11-10	13	9.6	390	295	11.7	3.3	1.5	7 - 12	1/4 - 7/16	76	10.5
UOW-11-14	16	11.8	290	311	12.3	3.5	1.6	10 - 17	7/16 - 5/8	76	10.5
UOW-11-22	24	17.8	220	326	12.8	3.9	1.8	11 - 24	7/16 - 5/8	76	10.5
UOW-11-30	32	23.7	160	347	13.7	4.4	2.0	14 - 36	5/8 - 1-3/16	76	10.5
SHUT-OFF CLUTCH											
UOW-T60-10	4 - 14	3.0 - 10.4	300	370	14.6	4.6	2.1	7 - 12	1/4 - 7/16	76	10.5
UOW-T60-14	5 - 17	3.7 - 12.6	240	385	15.1	4.9	2.2	10 - 17	7/16 - 5/8	76	10.5
UOW-T60-22	7 - 24	5.2 - 17.8	170	400	15.8	5.2	2.4	11 - 24	7/16 - 5/8	76	10.5
UOW-T60-30	10 - 32	7.4 - 23.7	130	420	16.6	5.7	2.6	14 - 36	5/8 - 1-3/16	76	10.5
GEARED WRENCHES											
UGW-6N	18	13.3	530	310	12.2	3.1	1.4	9 - 12	3/8 - 7/16	76	10.5
UGW-8N	23	17.0	410	322	12.7	3.2	1.5	10 - 17	7/16 - 5/8	76	10.5

Air Hose Size: 3/8 I.D.

Air Inlet: N.P.T. 1/4

*  logo indicates where ERGO-DRIVE sockets/extensions benefit tool operation.


DYNATORQUE MANUAL TORQUE MULTIPLIERS

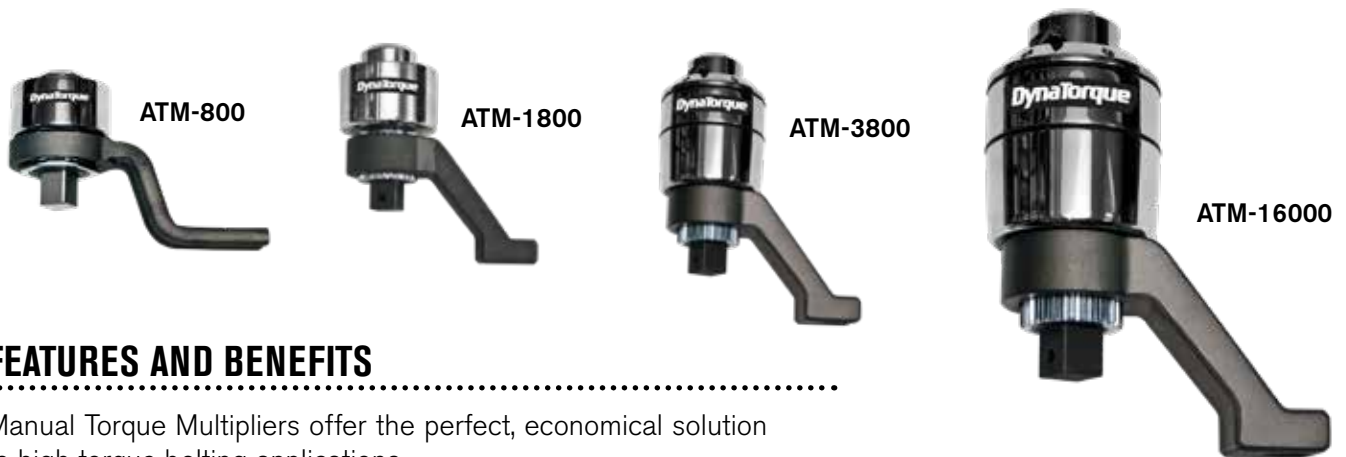

FEATURES AND BENEFITS


Manual Torque Multipliers offer the perfect, economical solution to high torque bolting applications.

- Superior power to weight ratio
- Delivered torque accuracy +/- 4%
- Anti-Wind Up safety feature (2,800 NM models and up) prevents input device from springing backward when released
- True torque multiplication ratios
- Standard reaction arms supplied. Custom reaction arms/nose extensions available to suit specific applications
- No preventative maintenance required
- Overload protected by shear-drive design (spare torsion shaft included). Easily replace sheared-off pins at the work site

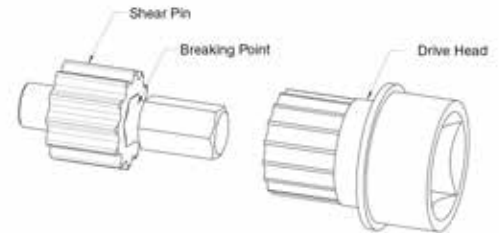

MODEL	INPUT IN	OUTPUT IN	RATIO	MAX TORQUE OUTPUT		A (MM)	B (MM)	C (MM)	D (MM)	WEIGHT*	
				Nm	Ft-Lb					LB	KG
ATM-800	1/2	3/4	1:3.5	800	590	65	105	132	130	2.9	1.3
ATM-1800	3/4	1	1:3.6	1,800	1,327	90	150	188	132	6.6	3.0
ATM-2800	1/2	1	1:13	2,800	2,066	95	200	240	132	11.5	5.2
ATM-3800	3/4	1	1:13	3,800	2,804	95	200	240	132	11.5	5.2
ATM-5000	3/4	1.5	1:17	5,000	3,690	120	215	272	150	15.4	7.0
ATM-8000	3/4	1.5	1:49	8,000	5,904	132	268	344	200	25.4	11.5
ATM-12000	3/4	1.5	1:58	12,000	8,856	156	272	348	200	30.9	14.0
ATM-16000	3/4	2.5	1:75	16,000	11,808	215	292	370	225	57.3	26.0

* Weight shown does not include weight of reaction device.

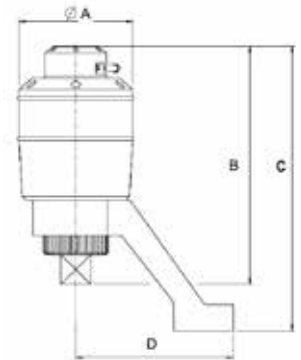

CARRYING CASE

All DynaTorque Multipliers are supplied in a rugged, weather-resistant, portable carrying case.



US-LT PNEUMATIC SCREWDRIVERS

TORQUE CONTROL AUTOMATIC SHUT-OFF TYPE

- Precise repeatability improves quality
- Minimal wear on internal parts for longer life
- Quick shut off for minimum torque reaction
- Speed choice for flexibility
- Easy external torque adjustment
- Midrange air motor provides high speed during entire cycle
- Ideal for industrial torque control applications



US-LT30B Series



US-LT50B Series



US-LT10B



US-LT20B Series



US-LT40B Series

TORQUE CONTROL LIGHT TOUCH (LT) SERIES - PUSH-TO-START INLINE

Recommended Air Pressure: 85 psi


MODEL	TORQUE RANGE		FREE SPEED	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL	AIR USAGE
	NM	IN-LB	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
US-LT10B	0.2 - 0.6	1.8 - 5.3	1,000	191	7.5	0.6	0.3	12.0	0.5	75	5.2
US-LT20B-10	0.4 - 1.1	3.1 - 9.7	1,000	180	7.1	0.7	0.3	13.0	0.5	70	5.6
US-LT20B-18	0.3 - 0.7	2.2 - 6.2	1,800	180	7.1	0.7	0.3	13.0	0.5	70	5.6
US-LT30B-11	1.1 - 2.1	9.7 - 18.5	1,100	187	7.4	0.9	0.4	15.5	0.6	70	7.0
US-LT30B-17	0.7 - 1.5	6.2 - 13.2	1,700	187	7.4	0.9	0.4	15.5	0.6	70	7.0
US-LT30B-23	0.4 - 1.0	3.5 - 8.8	2,300	187	7.4	0.9	0.4	15.5	0.6	71	7.0
US-LT40B-08	1.6 - 4.0	14.1 - 35.2	800	209	8.2	1.4	0.7	16.5	0.6	70	10.5
US-LT40B-15	1.0 - 2.2	6.2 - 19.4	1,500	209	8.2	1.4	0.7	16.5	0.6	70	10.5
US-LT40B-21	1.0 - 1.7	6.2 - 15.0	2,100	209	8.2	1.4	0.7	16.5	0.6	74	10.5
US-LT50B-05	5.0 - 10.2	44.0 - 92.4	480	240	9.5	2.2	1.0	19.5	0.8	74	17.5
US-LT50B-08	3.0 - 5.5	26.4 - 48.4	800	240	9.5	2.2	1.0	19.5	0.8	75	17.5
US-LT50B-17	1.5 - 2.6	9.7 - 23.0	1,700	240	9.5	2.2	1.0	19.5	0.8	75	17.5

Air Hose Size: 1/4 I.D. for US-LT10B - US-LT40B Series - 3/8" I.D. for US-LT50B Series
Each model is equipped with its standard and alternate clutch springs

Air Inlet: 1/8 for US-LT10B - US-LT20B Series - 1/4" for US-LT30B - US-LT50B Series

EXTERNAL TORQUE ADJUSTMENT (AIR SHUT-OFF)

Set the hand driver into the key hole on the Adjusting Gear, turn clockwise to increase torque. Turn counter clockwise to decrease torque.



408-088-2

SILENCER ASSEMBLIES

MODEL	DIRECT TYPE SILENCER	LEADER HOSE ASSEMBLY	EXHAUST HOSE ASSEMBLY
US-LT10 Series	N/A	934-201-0	459-885-1
US-LT20 Series	N/A	934-201-0	455-885-1
US-LT30 Series	408-088-2	934-150-0	408-885-0
US-LT40 Series	496-088-1	934-150-0	-

US-LT PNEUMATIC SCREWDRIVERS



US-LT30B_C Series



US-LT40B_C Series



US-LT40_C Series



US-LT30BL Series



US-LT40BL Series

TORQUE CONTROL LIGHT TOUCH (LT) SERIES - ANGLE AND LEVER

Recommended Air Pressure: 85 psi

MODEL	TORQUE RANGE SOFT JOINT		FREE SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		HEX BIT OR DRIVE SIZE IN	NOISE LEVEL dB(A)	AIR USAGE CFM
	NM	IN-LB		MM	IN	LB	KG	MM	IN			
ANGLE												
US-LT30B-11C	1.1 - 2.1	3.5 - 18.5	1,100	298	10.7	1.5	0.7	36	1.4	1/4	73	7.0
US-LT30B-17C	0.7 - 1.5	3.5 - 13.2	1,700	295	10.7	1.5	0.7	36	1.4	1/4	73	7.0
US-LT40B-03C	5.0 - 10.0	44 - 88	300	359	14.2	2.4	1.1	35.5	1.4	3/4	72	10.5
US-LT40B-05C	2.3 - 5.7	20.0 - 49.5	500	322	13.0	2.1	0.9	38.5	1.5	1/4	75	10.5
US-LT40B-08C	1.6 - 4.0	8.7 - 34.7	800	320	12.8	2.0	0.9	36	1.4	1/4	75	10.5
US-LT40B-15C	1.0 - 2.2	8.7 - 19.4	1,500	320	12.8	2.0	0.9	36	1.4	1/4	75	10.5
US-LT40-03C	5.0 - 10.0	43.4 - 86.8	300	360	14.2	2.4	1.1	35.5	1.4	1/4 Sq.	72	10.5
US-LT40-05C	2.3 - 5.7	20.0 - 50.2	500	322	13.0	2.1	0.9	35.5	1.4	1/4 Sq.	75	10.5
US-LT40-08C	1.6 - 4.0	8.7 - 34.7	800	320	12.8	2.0	0.9	32	1.3	1/4 Sq.	75	10.5
LEVER												
US-LT30BL-11	1.1 - 2.1	9.7 - 18.5	1,100	229	8.2	1.2	0.5	15	0.6	1/4	70	5.2
US-LT30BL-17	0.7 - 1.5	6.2 - 13.2	1,700	229	8.2	1.2	0.5	15	0.6	1/4	70	5.2
US-LT40BL-08	1.6 - 4.0	14.1 - 35.2	800	249	9.8	1.5	0.7	17	0.7	1/4	70	5.6
US-LT40BL-15	1.0 - 2.2	8.8 - 19.4	1,500	249	9.8	1.5	0.7	17	0.7	1/4	70	5.6

Angle Head Height: 32 - 36mm

Air Inlet: N.P.T. 1/4"

Air Hose Size: 1/4" I.D. for all models



US-LT31PB Series



US-LT41PB Series



US-LT51PB Series



US-LT60P Series

TORQUE CONTROL LIGHT TOUCH (LT) SERIES - PISTOL

Recommended Air Pressure: 85 psi

MODEL	TORQUE RANGE (SOFT JOINT)		FREE SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	NM	IN-LB		MM	IN	LB	KG	MM	IN		
US-LT31PB-05	2.4 - 5.0	21.1 - 44.0	500	189	8.2	1.9	0.9	16	0.6	70	7.0
US-LT31PB-11	1.1 - 2.1	9.7 - 18.5	1,100	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT31PB-17	0.7 - 1.5	6.2 - 13.2	1,700	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT31PB-23	0.4 - 1.0	3.5 - 8.8	2,300	170	7.0	1.6	0.7	16	0.6	70	7.0
US-LT41PB-08	1.6 - 4.0	14.0 - 35.2	800	175	7.7	1.9	0.9	17	0.6	70	10.5
US-LT41PB-15	1.0 - 2.2	8.8 - 19.4	1,500	175	7.7	1.9	0.9	17	0.6	70	10.5
US-LT41PB-21	1.0 - 1.7	8.8 - 15.0	2,500	175	7.7	1.9	0.9	17	0.6	74	10.5
US-LT51PB-05	5.0 - 10.5	44.0 - 92.4	480	198	8.5	2.6	1.2	20	0.8	74	17.5
US-LT51PB-08	3.0 - 5.5	26.4 - 48.4	800	198	8.5	2.6	1.2	20	0.8	75	17.5
US-LT51PB-17	1.5 - 2.6	13.2 - 22.9	1,700	198	8.5	2.6	1.2	20	0.8	75	17.5
US-LT60P-03*	7.0 - 20.0	61.6 - 176.0	320	230	9.1	3.7	1.7	22	0.9	75	21.0
US-LT60P-07*	4.0 - 10.0	35.2 - 88.0	650	230	9.1	3.7	1.7	22	0.9	76	21.0
US-LT60P-11*	4.0 - 7.0	35.2 - 61.6	1,100	230	9.1	3.7	1.7	22	0.9	77	21.0

Air Hose Size: 1/4 I.D. for US-LT31PB & US-LT41PB Series

Air Inlet: N.P.T. 1/4"

3/8 I.D. for US-LT31PB-05, US-LT51PB Series & US-LT60P Series

* Optional 3/8" Sq. Drive available for US-LT60P Series ADD (P) to Model Number

US & US-LD PNEUMATIC SCREWDRIVERS



US-LD40P-15



US-LD50P-08



US-3.5ACB

DIRECT DRIVE SERIES

Recommended Air Pressure: 72 psi

MODEL	MAX TORQUE				FREE	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE	AIR
	SOFT JOINT		HARD JOINT		SPEED							LEVEL	USAGE
	NM	FT-LB	NM	FT-LB	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
PISTOL													
US-LD40P-08	4.8	3.6	5.7	4.2	940	130	5.1	1.5	0.7	17	0.7	70	14.0
US-LD40P-15	3.0	2.2	3.2	2.4	1,700	130	5.1	1.5	0.7	17	0.7	70	14.0
US-LD40P-21	2.0	1.5	2.8	2.1	2,500	130	5.1	1.5	0.7	17	0.7	74	14.0
US-LD50P-05	10.0	7.4	11.2	8.3	500	153	6.0	2.0	0.9	20	0.8	74	17.5
US-LD50P-08	6.5	4.8	7.8	5.8	900	153	6.0	2.0	0.9	20	0.8	75	17.5
US-LD50P-17	3.5	2.6	5.9	4.4	1,900	150	5.9	2.0	0.9	20	0.8	75	17.5

ANGLE	MAX TORQUE				CAPACITY (SCREW SIZE)		FREE SPEED	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		NOISE LEVEL	AIR USAGE
	NM	FT-LB	NM	FT-LB	MM	IN	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
US-3.5ACB	1.75	1.1	2.5	1.8	4	No. 8	2,000	200	79	1.4	0.7	10.0	0.4	85	7.0

Air Hose Size: 1/4" I.D.

Air Inlet: N.P.T. 1/4"



US-3.5B



US-5

CUSHION CLUTCH SERIES

Recommended Air Pressure: 57 psi

MODEL	CAPACITY (SCREW SIZE)		FREE SPEED RPM	OVERALL LENGTH		WEIGHT LESS BIT		FROM CENTER TO OUTSIDE		NOISE LEVEL dB(A)	AIR USAGE CFM
	MM	IN		MM	IN	LB	KG				
US-3.5B	4	No. 8	2,000	214	8.5	1.4	0.6	17	0.7	75	7.0
US-5	5	No. 10	1,400	236	7.1	2.4	1.1	21	0.8	75	7.0

Air Hose Size: 1/4" I.D.

Air Inlet: N.P.T. 1/4"



US-350PW



US-450PW



US-652PW



US-450WB

IMPACT SERIES

Recommended Air Pressure: 85 psi

CAPACITY (SCREW SIZE)			FREE SPEED	OVERALL LENGTH		WEIGHT LESS BIT		FROM CENTER TO OUTSIDE		NOISE LEVEL	AIR USAGE
MODEL	MM	IN	RPM	MM	IN	LB	KG	MM	IN	dB(A)	CFM
PISTOL											
US-350PW	4	No. 8	15,000	121	4.8	1.2	0.5	17	0.7	81	7.0
US-450PW	5	No. 10	14,000	151	5.9	1.7	0.8	17	0.7	79	7.0
US-652PW	6	1/4	9,000	155	6.1	1.9	0.9	23	0.9	79	12.4
STRAIGHT											
US-6W	6	1/4	9,500	187	7.4	1.8	0.8	22.5	0.9	85	10.5
US-450WB	5	No. 10	11,000	161	6.3	1.2	0.6	18.5	0.7	80	7.0

Air Hose Size: 1/4" I.D.

Air Inlet: N.P.T. 1/4"

Recommended air pressure: 57 psi for US-350PW, US-450PW, US-6W, and US-450WB / 72 psi for US-652PW.

(R) Denotes Directional Muffled Rear Exhaust option

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368

Tested and **PROVEN** to **BEAT** the competition in vibration and noise levels. These tools outperform the competition in number of rundowns per battery charge.



SHUT-OFF IMPACT TOOLS

The **Signature Series** Impact Shut-Off Pistol Tool can operate as a standard impact wrench or as an impact wrench with a programmable shut-off point, preventing over-torquing. These innovative tools deliver a torque range of 3–120 Nm (2–89 ft-lb). No torque reaction, coupled with the ergonomic, lightweight design and reduced vibration, helps to prevent user injury.

FEATURES AND BENEFITS

- Brushless motor provides longer motor life and increased efficiency
- Easy-to-read process information lights
- Advanced shut-off system
- LED light for work-area illumination
- Programmable buttons for easy operation
- Li-Ion battery provides long battery life
- Mini USB port for connection to optional programmer (SPC-2PGM)



SIW-P5538

MODEL	TORQUE RANGE		MAX TORQUE		FREE SPEED	BATTERY (V)	WEIGHT		ANVIL SIZE	NOISE LEVEL dB(A)
	NM	FT-LB	NM	FT-LB			LB	KG		
SIW-P2525Q	3 - 25	2 - 18	40	30	2,400	20	2.2	1	1/4 QC	71
SIW-P3225Q	6 - 32	4 - 24	90	66	2,400	20	2.2	1	1/4 QC	71
SIW-P3238	6 - 32	4 - 24	90	66	2,400	20	2.2	1	3/8 Sq Dr	71
SIW-P5538	15 - 55	11 - 41	120	90	2,400	20	2.4	1.1	3/8 Sq Dr	71
SIW-P5550	15 - 55	11 - 41	120	90	2,400	20	2.4	1.1	1/2 Sq Dr	71
SIW-P10050	25 - 100	18 - 74	180	133	2,400	20	2.4	1.1	1/2 Sq Dr	71
SIW-P12050	30 - 120	22 - 89	210	155	2,400	20	2.9	1.3	1/2 Sq Dr	71

Shut-Off Impact Tools Include: Body Jacket, Bail, and one (1) 18V Li-Ion Battery

BATTERY AND CHARGER

The **Signature Series** Shut-Off Impact Tool battery features a slim profile design and a slide mount connection to the tool, which ensures durability and makes changing out batteries quick and easy.

BATTERY MODEL #	VOLTAGE / CAPACITY	TYPE
SIW-B20LI	20V, 2.0 Ah	Li-Ion
SIW-B20LI-HC	20V, 4.0 Ah	Li-Ion
CHARGER MODEL #	OUTPUT	INPUT
SIW-C18-20	18 - 20V, 4.0 A	100 - 240VAC, 50-60 Hz



SIW-B20LI



SIW-C18-20



ACCESSORIES

MODEL #	DESCRIPTION
BJ10091	Grey Body Jacket Cover
SIW-PBL	Suspension Bail
SIW-38PR	Pin Retainer Kit, 3/8" Drive
SIW-50PR	Pin Retainer Kit, 1/2" Drive



BJ10091



SIW-PBL

Quick shut-off, precision clutch minimizes torque reaction and ensures precise application of torque.

PRECISION CLUTCH TOOLS

Signature Series precision clutch tools feature a quick-releasing clutch that delivers accuracy across multiple joint types. Constructed of precision machined parts, this tool guarantees accuracy and durability over the life of the tool.

FEATURES AND BENEFITS

- LED indicator provides simple process information to the operator. The signal is visible from any angle
- Press button for easy F/R operation
- LED light for working in dark areas
- Trigger repeat protection avoids double hits on already seated screws
- Easily attached sliding battery system
- Mini USB port for connection to optional programmer (SPC-2PGM)
- Li-Ion battery pack delivers longer run time
- Ergonomic handle design provides outstanding balance and weight and is ideal for accessing hard-to-reach locations
- Angle tool enables multiple head positions



SPC-P2325Q



SPC-A21625

MODEL	TORQUE RANGE		FREE SPEED RPM RANGE (PROGRAMMABLE WITH PROGRAMMER ACCESSORY)	BATTERY VOLTAGE	TOOL WEIGHT (W/O BATTERY)		ANVIL SIZE
	NM	FT-LB			LB	KG	
Pistol Grip*							
SPC-P2325Q	.8 – 3	.6 – 2.2	500 – 1,550	18V	2.1	.95	1/4" hex
SPC-P2625Q	1 – 6	.7 – 4.4	300 – 1,000	18V	2.1	.95	1/4" hex
SPC-P2925Q	1.5 – 9	1.1 – 6.6	300 – 800	18V	2.1	.95	1/4" hex
SPC-P21225Q	2 – 12	1.5 – 8.8	250 – 600	18V	2.1	.95	1/4" hex
Right Angle Nutrunner**							
SPC-A21025Q	3 – 12	2.2 – 8.8	400 – 1,000	18V	3.5	1.6	1/4" hex
SPC-A21025	3 – 12	2.2 – 8.8	400 – 1,000	18V	3.5	1.6	1/4" Sq
SPC-A21038	3 – 12	2.2 – 8.8	400 – 1,000	18V	3.5	1.6	3/8" Sq
SPC-A21625Q	5 – 18	3.7 – 13.3	300 – 600	18V	3.5	1.6	1/4" hex
SPC-A21625	5 – 18	3.7 – 13.3	300 – 600	18V	3.5	1.6	1/4" Sq
SPC-A21638	5 – 18	3.7 – 13.3	300 – 600	18V	3.5	1.6	3/8" Sq
SPC-A23038	8 – 30	5.9 – 22	250 – 480	18V	3.5	1.6	3/8" Sq
SPC-A23538	10 – 35	7.4 – 25.8	220 – 330	18V	3.5	1.6	3/8" Sq
SPC-A25038	10 – 50	7.4 – 37	200 Non-Programmable Fixed Speed***	18V	5.3	2.4	3/8" Sq
SPC-A27038	20 – 70	14.8 – 51.7	170 Non-Programmable Fixed Speed***	18V	6.3	2.9	3/8" Sq
SPC-A210050	35 – 100	26 – 74	119 Non-Programmable Fixed Speed***	18V	7.4	3.4	1/2" Sq

* Pistol Grip Tools include: Torque Adjustment Tool and one (1) 18V Li-Ion Battery

** Angle Nutrunners include: Torque Adjustment Tool, Head Indexing Spanner Wrench, and one (1) 18V Li-Ion Battery

*** High torque tools feature fixed RPM

BATTERY AND CHARGER

The AIMCO **Signature Series** Precision Clutch Tool battery and charging system could not be more simple. One universal battery and charger interface with all of the **Signature Series** Precision Clutch tools. Each tool utilizes the same lightweight 18V Li-Ion battery, which provides superior battery life. The charger accepts input AC power of 100–240VAC, making use simple anywhere in the world.



SPC-B218LI




SPC-C218-19

BATTERY MODEL #	VOLTAGE	TYPE	CAPACITY	WEIGHT
SPC-B218LI	18V	Li-Ion	2.0 Ah	.8 Lb/.4 kg
SPC-B218LI-HC	18V	Li-Ion	4.0 Ah	1.4 Lb/.64 kg
CHARGER MODEL #	OUTPUT	INPUT	DIMENSIONS (W/O BATTERY)	WEIGHT
SPC-C218-19	18V-19.2V 3.0 A	100-240VAC 50-60 Hz	6.25" deep x 5" wide x 3.5" tall 158.75 mm x 127 mm x 89 mm	1.2 Lb/.54 kg

PRECISION CLUTCH TOOL ATTACHMENTS

A wide variety of special heads and attachments can be fitted to Signature Series Angle Nutrunners. Contact your AIMCO representative for assistance, 1-503-254-6600, or toll free 1-800-852-1368.

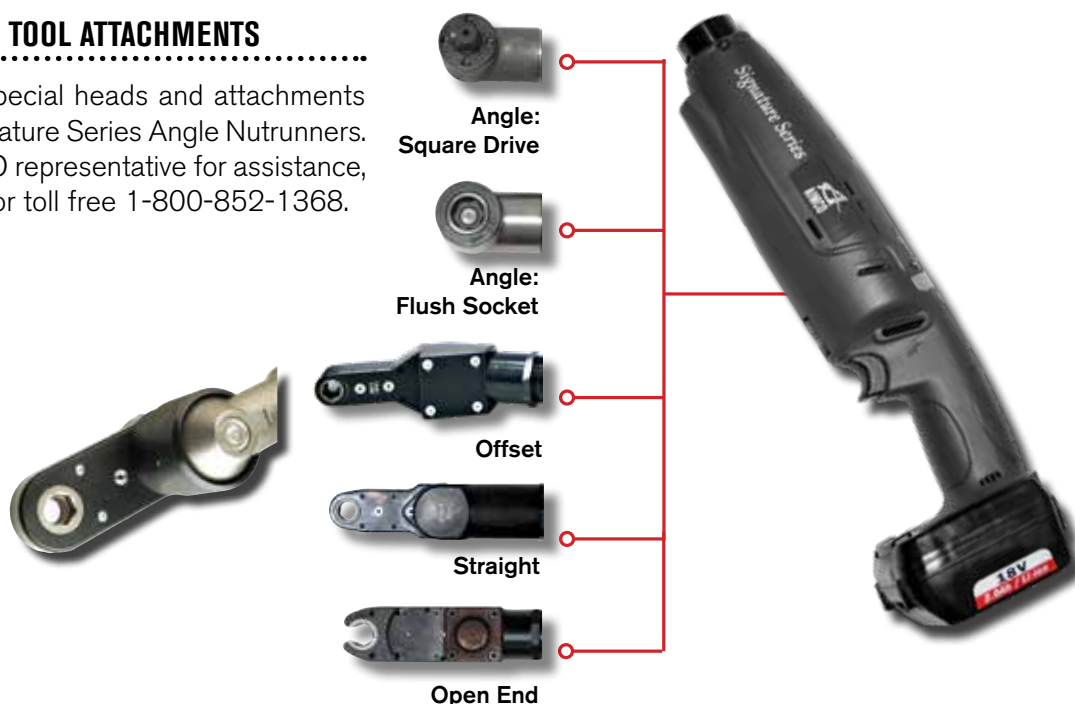

QUICK CLIP

The two piece Quick Clip comes with a belt clip and a stretch cord attachment for the Signature Series Precision Clutch pistol tool. The patented ball feature allows for quick and easy release.

SPC-QC

BODY JACKETS

Prevent damage to the workpiece.

MODEL	DESCRIPTION
 BJ10082	Clear Body Jacket for Signature Series Precision Clutch Pistol Tools
 BJ10083	Clear Body Jacket for Signature Series Precision Clutch Angle Nutrunners

TOOL SPEED PROGRAMMER

Each **Signature Series** battery tool has programmable features that enhance operator efficiency. Programmable features include:

- Tool speed control from minimum (1,500 rpm) to maximum (2,400 rpm) speed in 50 rpm increments
- Forward/Reverse Mode - Three setting options
- Two-stage trigger delay control
- Screw count / impact count
- Supervisor level "lock-out" control

Additionally, the **Signature Series** battery tool has an integrated mini USB connector that couples to the **Signature Series** Programmer module. Simply connect the tool to the Programmer Module and flash the tool to the desired RPM. The programmed RPM will remain until a change is desired.



SPC-2PGM

HOLSTERS



AIMCO offers right-hand and left-hand holsters for pistol and right angle tools.

SPC-P-HL-LH for Left Hand
SPC-P-HL-RH for Right Hand

TOOL BASKETS



21226

AIMCO tool baskets can be affixed to a bench or rack and can be used for either a pistol or right angle tool.

Signature Series

Signature Series tools can be adapted to a wide range of application-specific configurations.
Contact your AIMCO Customer Service Associate for assistance, 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRIC SCREWDRIVERS

ELECTRA[®] SERIES

- Available in push-to-start and lever start styles
- Ergonomic design – Lightweight, compact housings ensure operator comfort during operation
- Accurate torque control – Precise controlled fastening with automatic shut-off clutches
- External brush replacement – Virtually no down time for brush replacement
- External torque adjustment – Torque level can be easily adjusted by simply turning the external adjustment ring



AE-5681



- UL Listed and CE Certified – Drivers meet electrical safety standards in both the U.S. and Europe
- Direct plug-in style – Offers easy and convenient start-up (certain models), simply plug it in
- State-of-the-art motor design – Ensures comfortable grip temperature for operator and extended motor life

ELECTRA[®] SERIES

MODEL	TORQUE RANGE IN-LB	KGF-CM	FREE SPEED RPM	WEIGHT LB	KG	LENGTH IN	MM	HEX DRIVE IN	MM	POWER SOURCE
PUSH-TO-START DIRECT PLUG-IN SERIES										
AE-5681 (Includes torque cover)	3.5 - 15.6	4 - 18.0	1,000	1.2	0.5	9.3	237	1/4	6.4	115V AC*
AE-8681 (Includes pistol grip handle adapter)	15 - 45	23.0 - 51.8	600	1.6	0.7	10.6	269	1/4	6.4	115V AC*
LOW-VOLTAGE LEVER START SERIES (Requires External Power Supply)										POWER SUPPLY:
AE-2020	.35 - 1.3	.40 - 1.5	720	0.7	0.3	8.0	203	1/4	6.4	See page 121 for
AE-4020	.9 - 5	1.0 - 6.0	720	0.7	0.3	8.0	203	1/4	6.4	required power
AE-4520	1.3 - 8.7	1.5 - 10.0	720	0.7	0.3	8.0	203	1/4	6.4	supplies ²
AE-7010	6.1 - 17.4	7.0 - 20.0	750	1.4	0.6	9.3	236	1/4	6.4	
AE-8010	10.4 - 26.0	12.0 - 29.9	550	1.4	0.6	9.3	236	1/4	6.4	
LOW-VOLTAGE PUSH-TO-START SERIES (Requires External Power Supply)										POWER SUPPLY:
AE-7010PS	6.1 - 17.4	7.0 - 20.0	750	1.4	0.6	9.3	236	1/4	6.4	See page 121 for
AE-8010PS	10.4 - 26.0	12.0 - 29.9	550	1.4	0.6	9.3	236	1/4	6.4	power supplies ²

* 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRA[®] LOW ESD SERIES

- Grounded bit – Grounded chuck assembly routes any existing charge to ground
- Carbonized housing – Handle material and buttons are constructed of carbonized plastic throughout, enabling any charge received by the handle to be routed to ground
- Long-Lasting ESD resistant handle – Material will maintain its integrity for the life of the handle, unlike coatings or paints



AE-5681ESD



ELECTRA[®] LOW ESD SERIES

MODEL	TORQUE RANGE IN-LB	KGF-CM	FREE SPEED RPM	WEIGHT LB	KG	LENGTH IN	MM	HEX DRIVE IN	MM	POWER SOURCE
AE-4520ESD*	1.3 - 8.7	1.5 - 10.0	720	0.9	0.4	8.0	204	1/4	6.4	35V DC
AE-5681ESD	3.5 - 15.6	4 - 18.0	1,000	1.2	0.5	9.3	237	1/4	6.4	115V AC**

* Low-voltage units require an external power supply.

** 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

ELECTRIC SCREWDRIVERS

ELECTRA® SLIP CLUTCH SERIES

- High-speed performance – For quick and consistent assembly and disassembly
- Maximum ergonomics and convenience – Offers a combination of a slip clutch with a high speed motor to provide low torque reaction; one of the best power-to-weight ratios in the industry
- Added maintenance feature – LED light indicates when to change brushes. Brush cap contains a switch that shuts off the power during brush replacement
- Direct 110V plug-in – Eliminates the need for an external power supply



AE-2015



- 1/4" hex quick change chuck for easy bit changes
- External torque collar for easy torque adjustment.

ELECTRA® SLIP CLUTCH SERIES

MODEL	RECOMMENDED TORQUE RANGE IN-LB KGF-CM	FREE SPEED RPM	WEIGHT LB KG	LENGTH IN MM	HEX DRIVE IN MM	POWER SOURCE
AE-2015	4.3 - 21.7 5.0 - 25.0	1,000	1.2 .55	9.2 234	1/4 6.4	110 V / 120V AC*

** 220V AC is available upon request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.


PRECISION SERIES

For low torque applications

- Featuring ergonomic design
- Comes with options such as long-life brushless motors and adjustable speed power supplies

STANDARD MODELS

- Optional speed control power supply – Enables infinite control from 20% to 100% of maximum tool speed and adjustable soft start to minimize cross threading
- Ergonomic housing – Oval shape conforms to hand
- Duralite – Casing material provides a secure grip
- Integrated Lever – Feather touch integrated lever reduces travel and stress. Requires only 2 mm of travel to activate
- External torque control – Twist and go

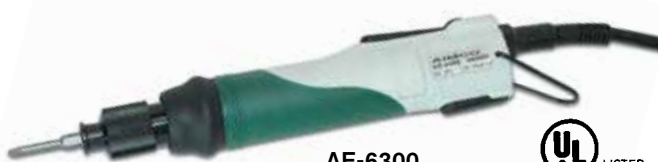

AE-6300
AE-6450



EXTENDED LIFE MODELS

- Sealed Swiss motor – For higher duty cycles, longer life, and less maintenance. Sealed casing means no brush changes are necessary
- Extended warranty on tool motor – Three year standard motor warranty
- Compact power supply – Makes setup a breeze

PRECISION SERIES

MODEL	TORQUE RANGE IN-LB KGF-CM	FREE SPEED RPM	WEIGHT LB KG	LENGTH IN MM	HEX DRIVE IN
STANDARD					
AE-6300	.85 - 5.0 1.0 - 5.8	725	0.9 0.4	8.5 216	1/4
AE-6450	1.3 - 8.7 1.5 - 10.0	770	0.9 0.4	8.5 216	1/4
HIGH SPEED					
AE-6300S	.35 - 4.3 0.4 - 5.0	920	0.9 0.4	8.5 216	1/4
AE-6450S	1.3 - 8.7 1.5 - 10.0	920	0.9 0.4	8.5 216	1/4
EXTENDED LIFE					
AE-6300M	1.0 - 5.5 1.1 - 6.3	550	0.9 0.4	8.5 216	1/4

ELECTRIC SCREWDRIVERS



**AE-224PS
AE-278PS**



APM-30

ELECTRA® SERIES ACCESSORIES - POWER SUPPLIES

MODEL	COMPATIBLE SCREWDRIVERS	TOOL RPM	VOLTAGE CONVERSION	DIMENSIONS	WEIGHT LB KG
AE-224PS	AE-2020 AE-6300 AE-2020ESD AE-6300S AE-4020 AE-6450 AE-4520 AE-6450S AE-4520ESD	720	VARIABLE SPEED SOFT START	2.6 x 1.6 x 5.0 66 x 41 x 127 mm	1.0 .45
AE-278PS	AE-7010 AE-8010 AE-7010PS AE-8010PS	STANDARD	110V AC - 220V AC 30V DC	1.6 x 5.0 x 2.6 41 x 127 x 66 mm	1.0 .45
APM-30	AE-6300M	550	110V AC - 220V AC 30V DC	2.1 x 3.4 x 1.9 53 x 87 x 48 mm	0.4 0.2



DIGITAL FASTENING COUNTER

The AM Series fastener counter verifies and error-proofs the assembly process.

- Buzzer notifies of missing screws, incomplete fastening, and thread damage
- Counts up to 60,000 units and up to 99 screws per unit
- Connects easily to automation equipment using standard input/output signals
- Large LCD screen is easy to read. A green screen indicates OK fastening, a red screen indicates NG

MODEL	COMPATIBLE SCREWDRIVERS
AM-45	For AE-2020, AE-4020, AE-4520 Standard and ESD types
AM-65	For AE-7010, AE-7010PS, AE-8010 and AE-8010PS

OPTIONAL ACCESSORIES



ANGLE HEAD ATTACHMENTS

Available for lever start series.
Not available for Low ESD Series.



PISTOL GRIP HANDLE

Converts to a pistol style driver for horizontal fastening. Available for Trigger Start only (included with AE-8681).



TORQUE COVER

Prevents accidental torque adjustment by the operator (included with AE-5681).

ITEM	MODEL	COMPATIBLE SCREWDRIVERS
Angle Head Attachments	AE-2045A AE-7080A	For AE-2020, AE-4020, AE-4520 For AE-7010, AE-8010
Pistol Grip Handle	AE-PG7080	For AE-7010, AE-7010PS, AE-8010, AE-8010PS
Torque Cover	AE-TC2040 AE-TC7080 4H2055	For AE-2020, AE-4020, AE-4520 For AE-7010, AE-7010PS, AE-8010, AE-8010PS For AE-8681

IMPACT TOOLS

UW-SERIES IMPACT TOOLS

UW-Series impact tools offer fast, economical operation in high-volume heavy assembly applications.



**UW-6SLRDK
UW-6SL(D)K
UW-6SLRK**



UW-61ERK



**UW-8SHK
UW-8SHRK**



**UW-9SRK
UW-9SK**



**UW-10SHK
UW-10SHRK**



**UW-13SK
UW-13SRK**



UW-131ERK

TWIN HAMMER PISTOL IMPACT WRENCHES

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6SLRDK	6	1/4	6.9 - 18	5 - 13	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Hex	91	12.4
UW-6SLDK	6	1/4	6.9 - 18	5 - 13	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Hex	91	12.4
UW-6SLK	6	1/4	7.8 - 19	6 - 14	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Sq.	92	12.4
UW-6SLRK	6	1/4	7.8 - 19	6 - 14	8,500	175	6.9	1.0	2.1	31.0	1.2	1/4 Sq.	92	12.4
UW-61ERK	8	5/16	14 - 40	10 - 30	7,300	150	5.9	1.5	3.3	29.5	1.2	3/8 Sq.	91	12.4
UW-8SHRK	8	5/16	18 - 40	13 - 30	7,300	172	6.8	1.6	3.4	31.0	1.2	1/2 Sq.	93	14.0
UW-8SHK	8	5/16	29 - 69	21 - 51	7,500	172	6.8	1.6	3.4	31.0	1.2	1/2 Sq.	93	14.0
UW-9SRK	10	3/8	35 - 87	26 - 64	7,000	178	7.0	1.8	3.9	34.0	1.3	1/2 Sq.	93	16.0
UW-9SK	10	3/8	35 - 87	26 - 64	7,000	178	7.0	1.8	4.0	34.0	1.3	1/2 Sq.	95	17.6
UW-10SHRK	12	1/2	47 - 170	35 - 125	6,000	183	7.2	2.1	4.7	30.5	1.4	1/2 Sq.	95	16.0
UW-10SHK	12	1/2	49 - 180	36 - 133	6,500	183	7.2	2.1	4.7	35.0	1.4	1/2 Sq.	95	16.0
UW-13SRK	13	1/2	88 - 250	65 - 184	6,000	215	8.5	2.6	5.7	37.5	1.5	1/2 Sq.	95	16.0
UW-13SK	13	1/2	88 - 250	65 - 184	6,500	215	8.5	2.6	5.7	37.5	1.5	1/2 Sq.	95	19.4
UW-131ERK	13	1/2	84 - 260	62 - 192	5,500	205	8.1	3.0	6.5	37.5	1.5	1/2 Sq.	97	19.4

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



**UW-6SSDK
UW-6SSLRDK**



**UW-6SSHDK
UW-6SSHK
UW-6SSHRDK
UW-6SSHRK**



**UW-9SSK
UW-13SSK**



UW-401L

TWIN HAMMER INLINE IMPACT WRENCHES

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6SSDK	6	1/4	7.8 - 22	6 - 16	7,500	185	7.3	1.0	2.1	28.0	1.1	1/4 Hex	91	10.5
UW-6SSLK	6	1/4	7.8 - 20	6 - 15	8,500	197	7.8	0.9	1.9	31.0	1.2	3/8 Sq.	90	10.5
UW-6SSRK	6	1/4	9.8 - 26	7 - 19	7,500	225	8.9	1.0	2.1	29.5	1.2	3/8 Sq.	91	10.5
UW-6SSHDK	8	5/16	15 - 30	11 - 22	7,500	205	8.1	1.2	2.7	22.0	0.8	1/4 Hex	91	12.4
UW-6SSLRDK	6	1/4	6.9 - 18	5 - 13	8,500	239	9.4	0.9	1.9	31.0	1.3	1/4 Hex	91	10.5
UW-6SSHK	8	5/16	22 - 50	16 - 37	7,500	205	8.1	1.3	2.7	27.5	1.1	1/4 Sq.	92	12.4
UW-6SSHRDK	8	5/16	15 - 30	11 - 22	7,300	249	9.8	1.3	2.8	27.5	1.1	1/4 Hex	91	12.4
UW-6SSHRK	8	5/16	22 - 50	16 - 37	7,300	249	9.8	1.3	2.8	27.5	1.1	3/8 Sq.	91	12.4
UW-9SSK	10	3/8	35 - 87	26 - 64	7,000	290	11.4	2.1	4.6	34.0	1.3	1/2 Sq.	95	16.0
UW-13SSK	13	1/2	89 - 250	66 - 184	6,300	281	11.1	3.2	7.0	39.0	1.5	1/2 Sq.	97	19.4
UW-401	38	1-1/2	880 - 2,500	649 - 1,844	3,200	494	19.5	15.1	33.2	62.5	2.5	1 Sq.	110	42.4
UW-401L	38	1-1/2	790 - 2,300	583 - 1,696	3,200	654	25.8	16.5	36.3	62.5	2.5	1 Sq.	110	42.4

Air Hose Size: 3/8" I.D., 1/2" I.D. for UW-401 and UW-401L models

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

IMPACT TOOLS MODEL NUMBER KEY

UW-__SH = Pistol grip

UW-__SSH = Straight handle

UW-__CSH = Angle head

UW-__P = Pistol grip for 140 and 381 series

+

L = Long anvil

R = Rear exhaust

+

K = Lightweight

DK = Driver-type anvil, lightweight

IMPACT TOOLS



UW-6CSK



**UW-6CSHK
UW-6CSHRK**



UW-9CSK



UW-13CSK

TWIN HAMMER ANGLE IMPACT WRENCHES

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-6CSK	6	1/4	7.8 - 22	6 - 16	7,500	218	8.6	1.4	3.1	28.0	1.1	3/8 Sq.	94	10.5
UW-6CSHK	8	5/16	19 - 41	14 - 30	7,500	238	9.4	1.7	3.8	27.5	1.1	3/8 Sq.	94	12.4
UW-6CSHRK	8	5/16	19 - 41	14 - 30	7,300	282	11.1	1.7	3.8	27.5	1.1	3/8 Sq.	94	10.5
UW-9CSK	10	3/8	27 - 71	20 - 52	7,000	337	13.3	2.8	6.1	34.0	1.3	1/2 Sq.	95	12.4
UW-13CSK	13	1/2	75 - 200	55 - 148	6,500	374	14.7	5.2	11.4	39.0	1.5	1/2 Sq.	97	26.5

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-140P(WR)



**UW-220P
UW-220PL**



UW-251P



**UW-381
UW-381L**



UW-381P

SWING HAMMER IMPACT WRENCHES

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-140P(WR)	12	1/2	70 - 210	52 - 155	6,500	200	7.9	2.7	5.9	33.0	1.3	1/2 Sq.	93	25.0
UW-220P	19	3/4	300 - 700	221 - 516	5,500	230	9.1	2.8	9.6	42.0	1.7	3/4 Sq.	95	25.0
UW-220PL	19	3/4	300 - 700	221 - 516	5,500	350	13.8	4.4	10.3	42.0	1.7	3/4 Sq.	95	25.0
UW-251P	25	1	600 - 1,000	443 - 738	5,500	276	10.9	8.0	17.6	55.0	2.0	1 Sq.	95	28.0
UW-381	38	1-1/2	760 - 2,000	561 - 1,475	4,700	395	115.6	9.5	20.9	58.5	2.3	1 Sq.	100	31.5
UW-381L	38	1-1/2	1,400 - 2,000	1,033 - 1,475	4,700	543	21.4	10.0	20.9	58.5	2.3	1 Sq.	100	31.5
UW-381P	38	1-1/2	760 - 2,000	561 - 1,475	4,700	276	10.9	10.0	20.9	58.5	2.3	1 Sq.	99	31.5

Air Hose Size: 3/8" for UW-140P(WR) 1/2" I.D. for other models

Air Inlet: N.P.T. 1/4" for UW-140P(WR)

N.P.T. 3/8" for UW-220P and UW-251P series

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-550



UW-75S

TWIN HAMMER JUMBO IMPACT WRENCHES

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-550	55	2-1/4	2,500 - 5,800	1,844 - 4,278	3,500	525	20.7	36.0	79.0	78.0	3.1	1-1/2 Sq.	112	79.0
UW-75S	76	3	7,800 - 17,000	5,753 - 12,539	1,400	670	26.4	56.0	123.0	96.0	3.8	1-1/2 Sq.	112	114.0

Air Hose Size: 3/4" I.D.

Air Inlet: N.P.T. 1"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

STUD BOLT WRENCH

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		TORQUE RANGE (APPROX)		SPEED RPM	OVERALL LENGTH		WEIGHT		FROM CENTER TO OUTSIDE		SQ. DR. OR HEX SIZE IN	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION
	MM	IN	NM	FT-LB		MM	IN	KG	LB	MM	IN			
UW-ST6SHK	8	5/16	22 - 49	16 - 36	6,500	170	6.7	1.7	3.7	24.0	1.0	3/8 Sq.	92	14.0

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UW-ST6SHK

GRINDERS



UAG-40SBL-136



UAG-50SBL-109
UAG-50SBL-120



UAG-70SBL-76



UAG-90SBL-59

ANGLE GRINDERS

Recommended Air Pressure: 85 psi

MODEL*	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	OVERALL HEIGHT MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UAG-40SBL-136	4	13,600	1.0	246 9.7	76 3.0	1.3 2.9	84	34.0
UAG-50SBL-109	5	10,900	1.0	246 9.7	76 3.0	1.4 3.1	82	34.0
UAG-50SBL-120	5	12,000	1.0	246 9.7	76 3.0	1.4 3.1	82	34.0
UAG-70SBL-76	7	7,600	2.0	300 11.8	98 3.9	2.9 6.4	83	57.0
UAG-90SBL-59	9	5,900	2.5	308 12.1	98 3.9	3.3 7.3	88	67.0



UG-25NA



UG-38N



UG-38NA



UG-38NL



UG-38NS



UG-50S-200
UG-60S-29



UG-45H

DIE GRINDERS

Recommended Air Pressure: 85 psi

MODEL*	COLLET CHUCK SIZE IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-25NA	1/4	23,500	0.3	153 6.0	0.5 1.2	82	10.7
UG-38N	1/4	25,000	0.4	164 6.5	0.6 1.3	85	10.7
UG-38NA	1/4	22,000	0.4	165 6.5	0.7 1.4	75	14.0
UG-38NL	1/4	21,000	0.4	317 12.5	0.9 2.0	85	10.7
UG-38NS	1/4	25,000	0.4	174 6.8	0.6 1.3	85	10.7
UG-50S-200	1/4	23,000	0.3	198 7.8	0.6 1.3	73	14.0
UG-45H	1/4	18,000	0.5	196 7.7	0.8 1.8	76	22.0
UG-60S-29*	1/4	2,900	0.5	227 8.9	1.1 2.3	77	18.0

* UG-60S-29 includes spanner wrench to tighten collet

MINI ANGLE DIE GRINDERS

Recommended Air Pressure: 85 psi

MODEL*	COLLET CHUCK SIZE IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	OVERALL HEIGHT MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-20A-200	1/4	20,000	0.2	131 5.2	80 3.2	0.5 1.1	75	10.7
UG-20A-120	1/4	12,000	0.2	131 5.2	80 3.2	0.5 1.1	76	10.7
UG-50S-200A	1/4	20,000	0.3	195 7.7	87 3.4	0.9 2.0	75	14.0



UG-20A-120
UG-20A-200



UG-50S-200A



UG-65EB



UG-65EBL



UG-650EL

Recommended Air Pressure: 85 psi

LIGHTWEIGHT GRINDERS

MODEL*	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-65EB	2.5	14,600	0.6	242 9.8	1.3 2.8	95	22.0
UG-65EBL	2.5	14,600	0.6	272 10.7	1.4 3.1	95	22.0
UG-650EL	2.5	14,600	0.6	420 16.5	1.6 3.4	85	22.0

HORIZONTAL GRINDER

Recommended Air Pressure: 85 psi

MODEL	CAPACITY (WHEEL SIZE) IN	SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH MM IN	WEIGHT KG LB	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
UG-1250L-72	5	7,200	1.0	436 17.2	2.8 6.2	88	32.7



UG-1250L-72

*Air Hose Size: 3/8" I.D. - 1/2" I.D. (UG-1250L-72)

Air Inlet: N.P.T. 1/4" - N.P.T. 3/8" (UAG-90SBL-59 and UG-1250L-72)

NOTE: Additional models available.

Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

SANDERS AND DRILLS

SANDER

Recommended Air Pressure: 85 psi

MODEL	CAPACITY (WHEEL SIZE)		SPEED RPM	RATED HORSEPOWER HP	OVERALL LENGTH		WEIGHT		NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
	IN	IN			MM	IN	KG	LB		
UP-25DB	5		10,000	0.3	212	8.3	1.7	3.7	73	7.0

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.



UP-25DB



**UD-50-22
UD-50-200**



UD-50-45



**UD-60-04
UD-60-07**



**UD-60-15
UD-60-20**



UD-60-29



**UD-80-04
UD-80-07**



UD-80-12



**UD-50S-22
UD-50S-45**



**UD-60S-15
UD-60S-29**



**UD-50S-45A
UD-50S-45A***



**UD-60S-15C
UD-60S-29C**

DRILLS

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		SPEED RPM	OVERALL LENGTH		WEIGHT WITH CHUCK		FROM CENTER TO OUTSIDE		NOMINAL CHUCK SIZE IN	TYPE OF SPINDLE IN-THR'D	NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
	MM	IN		MM	IN	KG	LB	MM	IN				
PISTOL													
UD-50-200	3	1/8	23,000	135	5.3	0.7	1.5	21.0	0.8	5/16	3/8-24UNF	73	14
UD-50-45	6	1/4	5,000	145	5.7	0.9	1.9	21.0	0.8	5/16	3/8-24UNF	72	14
UD-50-22	8	5/16	2,200	140	5.5	0.9	2.0	21.0	0.8	5/16	3/8-24UNF	72	14
UD-60-29	8	5/16	2,900	167	6.6	1.1	2.4	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60-20	8	5/16	2,000	180	7.1	1.2	2.6	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60-15	8	5/16	1,600	180	7.1	1.2	2.6	22.5	0.9	5/16	3/8-24UNF	76	18
UD-60-07	13	1/2	700	219	8.6	1.4	3.1	22.5	0.9	1/2	1/2-20UNF	75	18
UD-60-04	13	1/2	500	220	8.6	1.4	3.1	22.5	0.9	1/2	1/2-20UNF	75	18
UD-80-12	13	1/2	1,200	216	8.5	1.8	4.0	26.0	1.0	1/2	1/2-20UNF	79	23
UD-80-07	13	1/2	700	239	9.4	2.3	5.1	26.0	1.0	1/2	1/2-20UNF	79	23
UD-80-04	16	5/8	400	247	9.7	2.9	6.4	26.0	1.0	5/8	5/8-16UNF	79	23
INLINE													
UD-50S-45	6	1/4	5,000	210	8.3	0.9	1.9	21.0	0.8	5/16	3/8-24UNF	77	14
UD-50S-22	8	5/16	2,200	205	8.1	0.8	1.8	21.0	0.8	5/16	3/8-24UNF	77	14
UD-60S-29	8	5/16	2,900	227	8.9	1.1	2.3	22.5	0.9	5/16	3/8-24UNF	77	18
UD-60S-15	8	5/16	1,600	238	9.4	1.2	2.5	22.5	0.9	5/16	3/8-24UNF	77	18
ANGLE													
UD-50S-45A	4	#8	5,000	253	10	0.9	1.98	21.0	0.8	-	1/4-28UNF	79	14
UD-50S-45A*	4	#8	5,000	253	10	0.9	1.98	21.0	0.8	-	1/4-28UNF	79	14
UD-60S-29C	8	5/16	2,900	276	10.9	1.5	3.3	22.5	0.9	5/16	3/8-24UNF	79	18
UD-60S-15C	8	5/16	1,600	283	11.1	1.6	3.5	22.5	0.9	5/16	3/8-24UNF	79	18

* UD-50S-45A* comes with a cone jaw chuck installed.

Air Hose Size: 3/8" I.D. Air Inlet: N.P.T. 1/4"

NOTE: Other models are available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

PERCUSSION TOOLS



SBH-0

SBH-1A(R,H)

BRH-7(R,H)

Low-Vibration Type



BRH-1UD



BRH-5UD



BRH-1USD



BRH-5USD

RIVETING HAMMERS

Recommended Air Pressure: 85 psi

MODEL	CAPACITY		BLOW PER MIN. BPM	OVERALL LENGTH		WEIGHT		PISTON DIAMETER		PISTON STROKE		NOISE LEVEL dB(A)	AVERAGE AIR CONSUMPTION CFM
	DURALUMIN IN	STEEL IN		MM	IN	KG	LB	MM	IN	MM	IN		
STANDARD TYPE													
SBH-0	3/32	—	6,500	123	4.8	0.3	0.7	10.0	0.4	23	0.9	90	3.5
SBH-1A(R,H)*	7/64	—	4,000	209	8.2	0.9	1.9	11.1	0.4	56	2.2	92	5.0
BRH-7(R,H)*	-	-	3,400	168	6.6	1.6	3.6	19.1	0.8	50	2.0	100	17.0
LOW-VIBRATION TYPE													
BRH-1UD	1/8	3/32	2,800	122	4.9	1.1	2.4	14.3	0.6	38	1.5	95	12.0
BRH-5UD	1/4	3/16	1,800	189	7.4	1.4	3.1	12.7	0.5	100	4.0	95	13.0
BRH-1USD	#5	#3	2,800	143	5.6	1.4	3.1	14.3	0.6	38	1.5	95	12.0
BRH-5USD	1/4	#10	2,800	211	10.7	1.7	3.6	12.7	0.6	100	1.5	95	12.0

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

* R - Round Bushing H - Hex Bushing



CB-13P



RH-25



RH-80



RH-90



RH-100Z



RH-200

ONE SHOT HAMMERS

Recommended Air Pressure: 85 psi

MODEL	BLOW POWER LB	RIVET SET DIA X LENGTH IN	SHANK DIAMETER		STROKE		LENGTH		WEIGHT	
			MM	IN	MM	IN	MM	IN	LB	KG
CB-13P	1.7	4.04 x 9.86	—	—	3.0	0.12	185	7.3	0.7	0.3
RH-25	20.4	—	10.2	0.401	29.8	1.2	213	8.4	2.0	0.9
RH-80	27.6	—	10.2	0.401	29.8	1.2	254	10.0	2.9	0.3
RH-90	103	—	10.2	0.401	29.8	1.2	328	12.9	3.5	1.6
RH-100Z	78.1	—	10.2	0.401	29.8	1.2	328	12.9	3.9	1.8
RH-200	139	—	10.2	0.401	39.8	1.2	341	13.4	4.6	2.1

Air Hose Size: 3/8" I.D.

Air Inlet: N.P.T. 1/4"

NOTE: Additional models available. Please contact AIMCO, 1-503-254-6600, or toll free 1-800-852-1368.

SCREW PRESENTERS: OVERVIEW

For semi-automated assembly, look no further – AIMCO's Acra-Feed screw presenters provide:

PRODUCTIVITY

- One hand operation eliminates manual handling of screws
- Screw is presented to operator for easy magnetic or vacuum pickup
- Keeps workspace clear of dropped fasteners
- Quick feed rate from oscillating hopper design – up to two (2) screws per second
- Large hopper holds approximately 1,000 – 1,500 fasteners
- Solid design – no tie downs or straps required

FLEXIBILITY

- Perfect for contract or dedicated assembly
- Switch rails in minutes for different screw sizes

ERGONOMICS

- Allows for fewer arm and hand movements

RELIABILITY

- Heavy duty industrial design
- Modular design for easy repairs

QUALITY

- Uses existing or our new torque control drivers
- Keeps stray fasteners from getting into assemblies



Acra-Feed® Screw Presenter

ACRA-FEED®

FASTENING IN 3 EASY STEPS



1 Load screws into the hopper. There is no side to load unit and no gates to limit capacity.



2 Address screw with magnetized bit.




3 Bring screw to workpiece and fasten parts.

A-50 SCREW PRESENTERS



A-50BRBT-1
Robotic Screw
Presenter



A-50BRBT-4
Compact Robotic
Screw Presenter



A-50B-1
Standard Screw Presenter



STANDARD SCREW PRESENTERS

MODEL	ADDITIONAL RAIL PART NO.	SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50A-0	AR-0	#0	1.4	.39	10
A-50A-1.7	AR-1.7	-	1.7	.39	10
A-50B-1	BR-1	#1	2.0	.75	18
A-50B-2	BR-2	#2	2.3	.75	18
A-50B-3	BR-3	#3	2.6	.75	18
A-50B-4	BR-4	#4	3.0	.75	18
A-50C-6	CR-6	#6	3.5	.75	18
A-50C-8	CR-8	#6-8	4.0	.75	18
A-50C-10	CR-10	#10	5.0	.75	18

Dimensions: 5.1 (W) x 8.5 (L) x 5.3 (H) Weight: 7.0 lb.

ROBOTIC SCREW PRESENTERS

MODEL	ADDITIONAL RAIL PART NO.	SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50ARBT-0	AR-RBT-0	#0	1.4	.39	10
A-50ARBT-1.7	AR-RBT-1.7	-	1.7	.39	10
A-50BRBT-1	BR-RBT-1	#1	2.0	.70	18
A-50BRBT-2	BR-RBT-2	#2	2.3	.70	18
A-50BRBT-3	BR-RBT-3	#3	2.6	.70	18
A-50BRBT-4	BR-RBT-4	#4	3.0	.70	18
A-50CRBT-6	CR-RBT-6	#6	3.5	.70	18
A-50CRBT-8	CR-RBT-8	#6-8	4.0	.70	18
A-50CRBT-10	CR-RBT-10	#10	5.0	.70	18

Dimensions: 5.1" (W) x 10.8" (L) x 5.3" (H) Weight: 9.2 lb.

COMPACT ROBOTIC SCREW PRESENTERS

MODEL	ADDITIONAL RAIL PART NO.	NOMINAL SCREW SIZE		MAX SCREW LENGTH	
		IN	MM	IN	MM
A-50ARBTC-0	AR-RBTC-0	#0	1.4	.390	10
A-50ARBTC-1.7	AR-RBTC-1.7	-	1.7	.390	10
A-50BRBTC-1	BR-RBTC-1	#1	2.0	.700	18
A-50BRBTC-2	BR-RBTC-2	#2	2.3	.700	18
A-50BRBTC-3	BR-RBTC-3	#3	2.6	.700	18
A-50BRBTC-4	BR-RBTC-4	#4	3.0	.700	18
A-50CRBTC-6	CR-RBTC-6	#6	3.5	.700	18
A-50CRBTC-8	CR-RBTC-8	#6-8	4.0	.700	18
A-50CRBTC-10	CR-RBTC-10	#10	5.0	.700	18

Dimensions: 7.2 (L) x 4.9 (W) x 5.7 (H) Weight: 6.7 lb.

OPTIONAL ACCESSORIES

MODEL	PART NO.
Mag-O-Net Bit Magnetizer	AM1/4Z, AM5Z, AM3/16Z

WHICH TO USE...?

Standard Screw Presenters

For manual assembly stations where the operator must otherwise pick up and hold fasteners by hand.

Robotic Screw Presenters

For automated fastening systems or manual systems using vacuum assist to pick up non-ferrous fasteners.

Compact Robotic Screw Presenters

For automated systems, or manual systems, using vacuum-assist to pick up nonferrous fasteners when work space is limited,

ACRA-FEED AUTOMATIC SCREW FEED SYSTEMS

Reduces Cycle Time By Approximately Two Seconds Per Fastener

FEATURES AND BENEFITS

- Delivers fastener directly to the driver
- For #2 - #10 fasteners, up to 1 inch long
- Available for captive washer type screws (A-315V)
- Feed speed of up to 1 screw per second
- System includes feeder, hose assembly, air screwdriver, and FRL

PRODUCTIVE

- Eliminates reaching for fasteners
- Most jams are easily cleared on the line
- Frees operator's hand for productive use
- Large hopper holds between 1,000 – 5,000 fasteners

ERGONOMIC

- Eliminates manual handling of fasteners and shavings
- Reduces workspace clutter
- Keeps workspace clean of dropped fasteners
- Torque reaction of standard driver is minimal and can be eliminated with optional Ergo-Arm

RELIABLE

- Longest warranty in the industry – 3 years
- Rocking Bar design only operates as needed
- "Photo eyes" maximize motor life
- Design eliminates burrs and shavings by minimal handling of the fastener
- Durable head assembly lasts for years
- There are more Acra-Feed systems in use than any other system



A-2100



A-315V

MODEL	APPLICABLE SCREWS	SCREW LENGTH		HOPPER CAPACITY	MAX FASTENING SPEED	WEIGHT (LB)	DIMENSIONS L X W X H (IN)
		IN	MM				
A-2100 Series	M2-M5 (#2 - #10)	1/4-1	6-25	1,500cc (1,000-5,000 pcs)*	60 screws/min*	68	7 x 17 x 16
A-315V Series	M2-M5 (#2 - #10)	1/4-1	6-25	450cc (500-2,500 pcs)*	60 screws/min*	74	10 x 21 x 16

* Dependent on screw size

Delivery Hose: 10 ft

Air Pressure: 85 psi

Power: AC 110V, 20W, AC 220V by request. Contact AIMCO at 1-503-254-6600, or toll free 1-800-852-1368.

HOW TO ORDER: Acra-Feed systems are application-specific and configured to the unique workpiece and requirements of the user. Quotations are provided from a review of sample workpieces, 25 fasteners, and required torque specifications.

GRAVITY-DEFYING BALANCERS

TW-SERIES BALANCERS



TW-0 and TW-00

- Gravity defying / "true balance"
- No tension buildup to cause worker fatigue
- Easy external direct drive tensioning
- 360° upper swivel
- Safety cable provision
- Tool clip included



TW-3 through TW-70

- Tapered drum allows "true balance" throughout cable travel
- Easy external direct drive tensioning
- Cast aluminum casing for durability
- Permanent lubrication
- 360° top swivel
- Enclosed spiral spring for added safety
- Safety chain provision (TW-3 through TW-15 models)
- Automatic safety lock plus manual drum lock (TW-22 through TW-70)

MODEL	CAPACITY		ANTI-GRAVITY CAPACITY (LB)	CABLE
	LB	KG		
TW-00	1.1 - 3.3	0.5 - 1.5	2.5 - 3.0	18" stranded steel cable 1/8 dia.
TW-0	1.1 - 3.3	0.5 - 1.5	2.5 - 3.0	3.3-ft stranded steel cable 1/8" dia.
TW-3	2.2 - 6.6	1.0 - 3.0	4.5 - 6.0	4.3-ft stranded steel cable 5/32" dia.
TW-5	5.5 - 11.0	2.5 - 5.0	8.0 - 10.5	4.3-ft stranded steel cable 5/32" dia.
TW-9	9.9 - 19.8	4.5 - 9.0	15.0 - 19.0	4.3-ft stranded steel cable 5/32" dia.
TW-15	19.8 - 33.0	9.0 - 15.0	26.0 - 32.5	4.3-ft stranded steel cable 5/32" dia.
TW-22	33.0 - 48.4	15 - 22	41.0 - 48.0	5-ft stranded steel cable 3/16" dia.
TW-30	48.4 - 66.0	22 - 30	58.0 - 65.5	5-ft stranded steel cable 3/16" dia.
TW-40	66.0 - 88.0	30 - 40	77.5 - 87.5	5-ft stranded steel cable 3/16" dia.
TW-50	88.0 - 110.0	40 - 50	100.0 - 109.5	5-ft stranded steel cable 3/16" dia.
TW-60	110.0 - 132.0	50 - 60	122.0 - 131.0	5-ft stranded steel cable 3/16" dia.
TW-70	132.0 - 154.0	60 - 70	144.0 - 153.0	5-ft stranded steel cable 3/16" dia.

ASB-SERIES BALANCERS

- Built-in Safety Features: The cable, drum, and enclosed spring are fully visible without opening the unit for easy and convenient safety checks. The sturdy spiral spring is enclosed for greater control and safety
- Ergonomic Spring Release: The automatic safety lock provides extra control
- Extended Cable Length: Stainless steel cables allow for extended reach on applications
- Enhanced Gear Mechanism: Allows for more exact adjustment of tension
- No Recoil and Low Resistance: Tapered drum style provides gravity defying tool positioning and low travel



ASB-OC Gravity Defying and Hand Adjustable Balancer



**ASB-3C
ASB-5C**

MODEL	CAPACITY		STROKE		WEIGHT	
ASB-OC	1.1 - 3.3 lb	0.5 - 1.5 kg	51.1 in	130 cm	1.5 lb	0.7 kg
ASB-3C	3.3 - 6.6 lb	1.5 - 3 kg	86.4 in	220 cm	3.0 lb	1.4 kg
ASB-5C	5.5 - 11 lb	2.5 - 5 kg	86.4 in	220 cm	3.4 lb	1.5 kg

LINE REEL BALANCERS / RETRACTORS

LINE REEL BALANCERS

LR-Series

- Designed for light duty applications with small pneumatic tools
- Integrating air hose and support cable keep work areas clean
- Adjustable ball stop for optional positioning
- 1/4" I.D. polyvinyl hose with 1/4" NPT inlet
- 360 degree upper swivel
- Maximum 142 PSI



LR-09B-90/200

MODEL	HOSE LENGTH		CAPACITY	
LR-09B-90	35.5 in	90 cm	3 lb	1.5 kg
LR-09B-200	78.3 in	199 cm	3 lb	1.5 kg

RETRACTORS

RPA Series

- No tools needed to set tension
- 5 ft nylon coated steel cable
- Reinforced hanging bracket includes safety cable provision
- Adjustable cable stop
- Three (3) models support weight 0.5 – 5 lb
- Tool clip included

RMA-L Series

- Steel housing with polyester finish
- Reinforced hanging bracket includes safety cable provision
- 8 ft of 3/32" diameter coated steel cable
- Permanently lubricated
- Tool clip included
- External tension adjustment
- Ratchet cable lock



RMA-L Series



RPA Series

MODEL	CAPACITY	
RPA-1	0.5 - 1.5 lb	0.2 - 0.7 kg
RPA-2	1.5 - 3.0 lb	0.7 - 1.4 kg
RPA-3	3.0 - 5.0 lb	1.4 - 2.3 kg
RMA-7L	5 - 10 lb*	2.3 - 4.8 kg*
RMA-15L	10 - 15 lb*	4.5 - 6.8 kg*
RMA-20L	15 - 23 lb*	6.8 - 10.4 kg*

* With ratchet lock

ERGO-ARM TOOL SUPPORT SYSTEMS

FEATURES AND BENEFITS

- Ergonomic support for electric and pneumatic tools reduces operator fatigue
- Increases productivity, consistency, and accuracy



AD-D1098-PAC



AD-D1098-SAC

PARALLEL ARM SERIES

AD-D1098-P, AD-D1098-PAC, AD-D1098-PACE

- Minimizes operator control
- Vertical adjustment eliminates cross-threading
- Fixtured tool increases repeatability
- Adjustable reach
- Available in air or oil cylinder models
- Electric tool mount standard on PACE model

SINGLE ARM SERIES

AD-D1098-S, AD-D1098-SAC

- Full tool rotation
- Operator control
- Adjustable reach
- Compatible with automatic screw feeder
- Available in air or oil cylinder models

MODEL	ARM STYLE	TOOL MOUNT	IN	REACH MM	CAPACITY LB	KG	MAXIMUM TORQUE* IN-LB	NM
AIR CYLINDER SERIES								
AD-D1098-SAC	Single	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PAC	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-PACE	Parallel	Electric	4 - 33	102 - 838	0 - 15	0 - 7	110	12
OIL CYLINDER SERIES								
AD-D1098-S	Single	Air manifold**	4 - 33	102 - 838	0 - 15	0 - 7	110	12
AD-D1098-P	Parallel	Air manifold	4 - 33	102 - 838	0 - 15	0 - 7	110	12

* Max torque allowed may be dependent on tool clutch type and joint rate

** For single arm electric tool mount, order EAP-202ED-KIT

SPECIAL FEATURES OF CLASSIC STYLE ERGO-ARM

Dual ball bearing
joint construction for
smoother movement
and long life

Air regulator offers precision
adjustment of resistance for
perfect balance

Unique upper
rail adjustment
allows true vertical
approach to any
fastener – no cross-
threading

ERGO-ARM ACCESSORIES AND LINEAR ARM

ERGO-ARM ACCESSORIES

- End-of-Arm Tooling options for the Ergo-Arm allow you to choose the style right for your application
- Tool holders permit the tool to swivel, rotate, swing, or twist. Heavy duty construction can lock out any single, or combination of rotating, actions allowing only the motions required by your application
- End-of-Arm Tooling Brackets are simple to use. One Ergo-Arm can be used for more than one application

FOR USE WITH MODELS AD-D1098-S/SAC



EAP-202ED-KIT
Electric Driver Tool
Mount Kit

FOR USE WITH MODELS AD-D1098-P/PAC



EAP-203-ASSY
Air Manifold
Tool Mount Kit
(Standard on
parallel units)



EAP-202ASSY
Driver Tool
Mount

LINEAR ARM

- Smooth movement and perfect balance while limiting operator control
- Machined stainless steel and ball bearing construction
- Two high quality tool balancers are included with each arm to provide a wide range of adjustment

LINEAR ARM KIT




LQ-0002 Linear Arm
ships with two ASB-0C
balancers.

LQ-0004 Linear Arm
ships with two ASB-3C
balancers.

LQ-0024H Heavy Duty
Arm
ships with two ASB-3C
balancers.

PARALLEL ARM KIT



EAA-04 - Provides easy
conversion of standard Ergo-
Arms to the parallel style.

MODEL	DESCRIPTION	MAX. REACH		WEIGHT CAPACITY		MAX TORQUE		HEIGHT		STANDARD TOOL MOUNT DIAMETER	
		IN	CM	LB	KG	FT-LB	NM	IN	CM	IN	CM
LQ-0002	Linear Arm	14	37	1 - 5	0.5 - 2.3	20	27	24	61	1.6	4.1
LQ-0004	Linear Arm	24	58	3 - 10	1.4 - 4.5	25	34	36	91.4	1.6	4.1
LQ-0024H	Heavy Duty Arm	24	58	3 - 10	1.4 - 4.5	75	102	36	91.4	1.6	4.1

CUSTOM REACTION DEVICES

- Torque Tubes
- Articulating Torque Arms
- Ergo Arm 3 Zero Gravity Arms
- Smart Arms



Articulating
Smart Carbon
Arm



Articulating
Torque Arm



Carbon Fiber
Arm



Ergo-Arm 3



Torque Tube

Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368, in order to determine the exact torque reaction system needed to improve the productivity and ergonomics of your assembly station.

GCI TORQUE REACTION ARMS

RUGGED FLEXIBILITY FOR EVEN THE MOST COMPLEX TORQUE APPLICATIONS



Constructed of durable aluminum, steel, or carbon fiber, GCI Torque Arms are available with multiple tool mounting options for application specifics. These highly ergonomic and user friendly arms are available in torque ranges of 150 Nm to 7,500 Nm and with reaches ranging up to 20 ft.

GCI arms can be designed as Smart Arms with encoders and intuitive PC-based AdaptiCS software. This complete Smart Arm system error-proofs even the most complex torque applications.

FEATURES AND BENEFITS

- Available in aluminum, steel, or carbon fiber
- Configurable installation: floor mount, wall mount, overhead mount, bench mount, or portable base
- Braking options: manual/automatic, discrete braking with verification, parking brakes, and electric/pneumatic actuation
- Tool holding options: fixed position, gimbal mount
- Integrated tool start/brake actuation capability: tool trigger start, remote tool start
- Smart Arm Capabilities:
 - Available with as many as six encoders to monitor all desirable tool positions relative to application
 - Intuitive, user-friendly AdaptiCS PC-based software that runs on an integrated industrial PC or on a customer supplied PC
 - Accepts easily scalable part images



**Rugged tablet
PC option for Smart Arm**

MODEL	MAX. TORQUE	MAX. TOOL WEIGHT	MAX. REACH	MAX. VERTICAL TRAVEL	CONSTRUCTION
IPT SERIES - TORQUES TO 375 NM					
IPT150	150 Nm	12 lb	5 ft	30 in	Aluminum
IPT375	375 Nm	50 lb	6 ft	36 in	Steel
IP SERIES - TORQUES TO 4,000 NM					
IP4	550 Nm	30 lb	8 ft	48 in	Steel
IP5	1,000 Nm	50 lb	12 ft	60 in	Steel
IP7	3,000 Nm	100 lb	12 ft	60 in	Steel
IP8T	4,000 Nm	100 lb	12 ft	72 in	Steel
F SERIES - CARBON FIBER ARMS					
F70	70 Nm	10 lb	3 ft	18 in	Carbon Fiber Composite
F600	600 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F1500	1,500 Nm	50 lb	20 ft	72 in	Carbon Fiber Composite
F3000	3,000 Nm	75 lb	20 ft	72 in	Carbon Fiber Composite
F7500	7,500 Nm	75 lb	12 ft	72 in	Carbon Fiber Composite

GCI TORQUE REACTION ARMS

FEATURES



AdaptiCS Software



- Batch count capabilities
- Bidirectional arm articulation tracking
- Full torque/angle results display
- Integrates into any line control (PLC, MES, etc.)
- Multiple part locate strategies (1-point, 2-point, 3-point)
- Fully programmable dynamic display with integrated PC option
- Multiple rework strategies to fit customer requirements
- Integrates devices such as torque controllers via open protocol, encoded GCI torque reaction arms, scanners, vision cameras, and digital IO (pass/fail)
- AdaptiCS Enterprise (optional) provides full line control, interlocks, and data collection
- Runs on Windows 7, 8, and 10

CARBON TORQUE ARMS / TUBES

CARBON TORQUE ARMS / TUBES

Carbon Arms and Carbon Torque tubes are lightweight, yet strong devices designed to absorb torque reactive forces. Highly flexible and modular, they adapt to a wide range of tools, and eliminate hazards to operators during fastening processes.



FEATURES AND BENEFITS

- Absorb torque reaction from continuous drive tools
- Counter balance tool weight when configured with AIMCO's wide array of tool balancers (page 130) or with integrated balancer kits
- Orient tool correctly to the workpiece to improve efficiency and reduce operator effort in alignment to the fastener



ACA-POSIX POSITIONING SYSTEM

The compact, self-contained

ACA-Posix process visualization system guides operators through their assigned tasks. It connects to ACA-P2 series arms with integrated balancer kits.

FEATURES AND BENEFITS

- Intuitive and simple programming on 7" color LCD touch-screen display
- Store up to 500 unique assembly sequences
- Communicates directly with Power Tool controllers over digital I/O
- Store and display product images or CAD drawings. Images/drawings are displayed with targeting sequences to direct operators easily through their task
- Output for synchronizing with line controls

TELESCOPIC TORQUE ARMS



ACA80-1500



ACA-V15-1000



ACA-P240-2500

ACA Series

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA10-1000	495	1,105	10
ACA10-1500	665	1,605	10
ACA15-1000	486	1,066	15
ACA15-1500	646	1,556	15
ACA15-2000	806	2,046	15
ACA40-1000	486	1,066	40
ACA40-1500	646	1,556	40
ACA40-2000	806	2,046	40
ACA40-2500	986	2,576	40
ACA80-1500	658	1,586	80
ACA80-2000	828	2,078	80
ACA80-2500	998	2,588	80
ACA150-1500	668	1,578	150
ACA150-2000	838	1,918	150
ACA150-2500	1003	2,248	150
ACA220-1500	668	1,578	220
ACA220-2000	838	2,088	220
ACA220-2500	1,003	2,588	220

ACA-V Series

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA-V15-1000	777	1,345	15
ACA-V15-1500	937	1,835	15
ACA-V15-2000	1,097	2,325	15
ACA-V40-1000	777	1,345	40
ACA-V40-1500	937	1,835	40
ACA-V40-2000	1,097	2,325	40
ACA-V40-2500	1,277	2,855	40
ACA-V80-1500	949	1,865	80
ACA-V80-2000	1,119	2,357	80
ACA-V80-2500	1,289	2,867	80
ACA-V150-1500	960	1,957.5	150
ACA-V150-2000	1,129	2,357	150
ACA-V150-2500	1,294	2,862	150
ACA-V220-1500	960	1,957.5	220
ACA-V220-2000	1,129	2,357	220
ACA-V220-2500	1,294	2,867	220

ACA-P2 Series X,Y Axis Encoders

(Requires ACA-POSIX System)

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACA-P215-1000	647	1,227	15
ACA-P215-1500	803	1,713	15
ACA-P215-2000	977	2,227	15
ACA-P240-1000	647	1,227	40
ACA-P240-1500	803	1,713	40
ACA-P240-2000	977	2,227	40
ACA-P240-2500	1,157	2,737	40
ACA-P280-1500	830	1,757	80
ACA-P280-2000	1,000	2,249	80
ACA-P280-2500	1,169	2,760	80
ACA-P2150-1500	839	1,749	150
ACA-P2150-2000	1,009	2,087	150
ACA-P2150-2500	1,174	2,419	150
ACA-P2220-1500	839	1,749	220
ACA-P2220-2000	1,009	2,259	220
ACA-P2220-2500	1,174	2,760	220

CARBON TORQUE ARMS / TUBES

ANTI-ROTATION TORQUE ARMS



ACTT-V40-850 300

ACTT SERIES TORQUE TUBES

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX TORQUE NM
ACTT-V15-600 150	150	600	15
ACTT-V15-800 300	300	800	15
ACTT-V40-600 150	150	600	40
ACTT-V40-850 300	300	850	40
ACTT-V40-1500 600	600	1,500	40
ACTT-V80-900 300	300	900	80
ACTT-V80-1500 600	600	1,500	80
ACTT-V80-2100 900	900	2,100	80



ACPTT-V40-SA-510 150

ACPTT SERIES TORQUE TUBES FOR ACSA ARTICULATING SUPPORT ARMS

MODEL	MIN. LENGTH MM	MAX. LENGTH MM	MAX LENGTH MM
ACPTT-V15-510 150	150	600	15
ACPTT-V15-710 300	300	800	15
ACPTT-V40-510 150	150	600	40
ACPTT-V40-760 300	300	850	40
ACPTT-V40-1410 600	600	1,500	40
ACPTT-V80-810 300	300	900	80
ACPTT-V80-1410 600	600	1,500	80

ACCESSORIES

TOOL HOLDERS

MODEL	DESCRIPTION
FOR ACRADYNE TOOLS	
ACAH-40PS1000	Tool holder for carbon fiber arm, AcraDyne 1000 series pistol/straight tools, 40 Nm
ACAH-80PS3-5000	Tool holder for carbon fiber arm, AcraDyne 3000/5000 series pistol/straight tools, 80 Nm
ACAH-150PS3-5000	Tool holder for carbon fiber arm, AcraDyne 3000/5000 series pistol/straight tools, 150 Nm

MODEL	DESCRIPTION	MIN. TOOL GRIP (MM)	MAX. TOOL GRIP (MM)
FOR TELESCOPIC ARMS			
ACAH-15	Base tool holder 4 screws	27	45
ACAH-40-80	Base tool holder 4 screws	30	60
ACAH-150-220	Base tool holder 4 screws	40	70
Multi-Position			
ACAH-15-MPE2745	Multi-position tool holder interface	27	45
ACAH-150220-MPE4070	Multi position tool holder	40	70
ACAH-4080-MPE2745	Multi-position tool holder	27	45
Swivel			
ACAH-S154080	Swivel tool holder 20 to 35 mm	20	35
ACAH-SL15150	Swivel tool holder 40 to 55 mm	40	55

MODEL	DESCRIPTION	MIN. TOOL GRIP (MM)	MAX. TOOL GRIP (MM)
FOR ANTI-ROTATION ARMS			
ACAHTT-15A-3060	Angle Tool Holder, 15 Nm Arm	30	60
ACAHTT-15S-2745	Straight Tool Holder, 15 Nm Arm	27	45
ACAHTT-4080A-3165	Angle Tool Holder, 40/80 Nm Arms	31	65
ACAHTT-40S-2745	Straight Tool Holder, 40/80 Nm Arms	27	45

Straight

Angle

ACSA ARTICULATING SUPPORT ARMS



ACSA-600-1500

MODEL	MAX REACH MM	MAX HEIGHT MM	MAX TORQUE NM
ACSA-600-1500	600	1,500	80
ACSA-800-1500	800	1,500	80
ACSA-1000-1500	1,000	1,500	80

BALANCER KITS FOR ACA-P2 SERIES

MODEL	MIN. CAPACITY (KG)	MAX. CAPACITY (KG)
ACA-P2BK-4	2	4
ACA-P2BK-6	4	6
ACA-P2BK-8	6	8
ACA-P2BK-10	8	10
ACA-P2BK-14	10	14




ACA-P2BK-10

WORKSTATION COMPONENTS AND ASSEMBLIES


COMPONENTS

TRACK


Steel with beige polyester finish. Use for vertical and horizontal workstation support.



PART NUMBER	30# TRACK
AT3-3	3 ft track
AT3-4	4 ft track
AT3-6	6 ft track
AT3-9*	9 ft track



PART NUMBER	30# TRACK
AT5-3	3 ft track
AT5-4	4 ft track
AT5-6	6 ft track
AT5-9*	9 ft track
AT5-12*	12 ft track



TRACK NUT (ATN-3/5)

Zinc plated steel. Use to attach accessories to track, as end stops, or to isolate rolling accessories.


- ATN-3 for 30 lb. track
- ATN-5 for 50 lb. track



END STOP (AES-3/5)


Zinc oxide finish. Use to prevent balancer trolley from "overtouring" horizontal track.

- AES-3 for 30 lb. track
- AES-5 for 50 lb. track



MOUNTING PLATE (AMP-5)

Black polyester finish. Use as a base to mount vertical uprights.



END CAP (AEP-3/5)

Black molded vinyl. Use to cap track ends for a professional finish.


- AEP-3 for 30 lb. track
- AEP-5 for 50 lb. track



ANGLE BRACKET (AB-3/5)

Black polyester finish. Use to mount horizontal track to vertical track.


- AB-3 for 30 lb. track
- AB-5 for 50 lb. track



JOINT HANGER BRACKET (AJH-3/5)

Black polyester finish. Use to couple and hang end-to-end track.


- AJH-3 for 30 lb. track
- AJH-5 for 50 lb. track



BALANCER TROLLEY (ABT-3/5)

Black polyester finish. Use as moving support for tool balancers, hose, and cable. Quality ball bearing wheels for long life and smooth tracking.


- ABT-3 for 30 lb track (1.00 dia)
- ABT-5 for 50 lb track (1.25 dia)



HANGER BRACKET (AHB-3/5)


Black polyester finish. Use to suspend track at right angle.

- AHB-3 for 30 lb. track
- AHB-5 for 50 lb. track



VERTICAL COLUMN (AVC-5*)


Beige polyester finish, 3" diameter x 9 ft upright steel column with welded base. Use as floor mount for extra stability with jibs or workstation components.



HOSE/CABLE TROLLEY


Black polyester finish. Use for moving cable or hose festoon. Supports hose cable OD .60-.94.

- AIC3-2 for 30 lb. track
- AIC5-2 for 50 lb. track




U-BOLTS (AUB-5)

Zinc plated steel. Use to secure boom bracket, or any flat metal plate, to AVC-5 (sold individually).



END CLAMP (AEC5-2)


Black polyester finish. Use as end stop with hose carrier for festoon. Cable/hose OD .60-.94.



SUPPORT CLAMPS (ASC-3/5)

Black polyester finish. Use as additional support for track.

- ASC-3 for 30 lb. track
- ASC-5 for 50 lb. track




TOOL CLIP (SH-5)

Steel clip with safety latch. Use for tool attachment and as replacement clip for lightweight tool balancers. Measures 2.37" long.




ROLLING HANGER (ABT5-R)

Black polyester finish. Use as support for rolling track. Allows X/Y axis movement, includes ball bearing wheels.



90° CONNECTOR FOR 3/8" HOSE (WSCH)

3/8" I.D. Brass. Use to provide stable transfer point from air line to tool. 90 degree connector attaches to ABT-5.




WALL- AND FLOOR-MOUNTED JIBS

3 FT. SWINGING JIB (AW3S)

3 FT FIXED JIB (AW3F)

3 FT. SWINGING JIB FOR CHANNEL MOUNT (AJS3**)

Jibs are mounted to wall or beams to create free standing workstations. End stop, end cap, and balancer trolley included. Maximum weight: 30 lb.

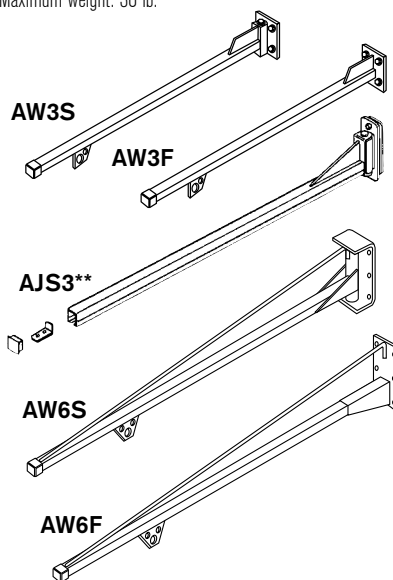

6 FT. SWINGING JIB (AW6S)

6 FT FIXED JIB (AW6F)

Jibs can be wall mounted or attached to vertical column (AVC-5) to create a freestanding workstation. End stop, end caps, and balancer trolley are included. Maximum weight: 50 lb.

All complete assemblies are beige polyester finish and include balancer trolley, end caps, and end stops. Floor mounted assemblies are not able to ship via UPS.

When choosing a workstation system, remember...

Total weight capacities should include tool balancer, hose/cable, and tool/fixture. Units need to be supported vertically and horizontally every 6 ft.

* Additional freight may apply

** AJS3 Does not include balancer trolley

WORKSTATION COMPONENTS AND ASSEMBLIES

FLOOR MOUNTED 3 FT. SWINGING JIB* (AW3FMS)

FLOOR MOUNTED 3 FT. FIXED JIB* (AW3FMF)

Maximum weight: 30 lb
Column height: 6 ft

FLOOR MOUNTED 6 FT. SWINGING JIB* (AW6FMS*)


FLOOR MOUNTED 6 FT. FIXED JIB* (AW6FMF*)

Maximum weight: 50 lb
Column height: 9 ft

*Units include end stop,
balancer trolley and intermediate carrier.

BENCH MOUNTED SWINGING JIB (JJ30-S) BENCH MOUNTED FIXED JIB (JJ30)


Maximum weight: 30 lb
Column height: 48" including mounting plate
3 ft. swinging jib includes balancer
trolley, end stop, and cap

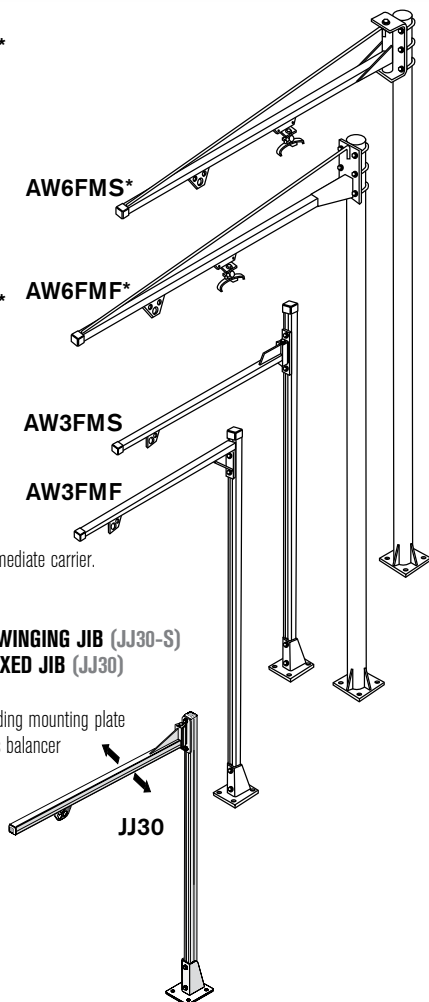

AIMCO WORKSTATION KIT

BENCH MOUNTED WORKSTATION WITH TORQUE ARM (JJ30-TA**)

- 5 lb. maximum weight (RPA-3 included)
- 5' column height including mounting plate
- 38" jib length (swinging)
- 15 ft-lb torque rating
- 3/8" NPT inlet
- 1/4" NPT outlet
- Beige polyester finish
- 1/4" braided air hose
- 21" maximum vertical arm travel

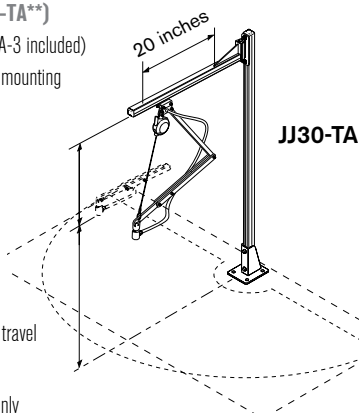

**Additional freight may apply
**For use with pneumatic tools only

CREATE A CUSTOM SUPPORT SYSTEM USING AIMCO'S QUALITY PRODUCTS

- Organize work area to create a safe, productive working environment
- Reduce risk of injury to assembler by providing support for heavy tools
- Protect valuable tools, fixtures, and monitoring devices from damage by suspending them out of the way

AIMCO BASIC WORKSTATION KIT (ATW-50)




- 50 lb maximum weight capacity
- 48" uprights
- 36" extensions
- Table mounts included
- 6' tool rail with rolling trolley included
- All necessary hardware included

TROLLEY MOUNTED TORQUE ARM WITH 3-LB RETRACTOR AND HOSE (FA-50-2*)

Ergonomic arm absorbs torque reaction.
Moves front to back along overhead jib.

(TA-50-2)

Moves side to side on overhead track.



TOOL BASKET (21226)

Mounts easily to any work area to hold
pistol and angle style tools.

AIMCO can customize a workstation for you.
Contact an AIMCO Customer Service Associate 1-503-254-6600, or toll free 1-800-852-1368.

AIR PREPARATION UNITS

AFRL STACKING FILTER/REGULATORS


Stacking filter/regulator combinations provide air filtration and precise regulation in a single unit for easy mounting and installation.

FEATURES AND BENEFITS


- All models include L-mount bracket, gauge, and metal bowl shields
- Polycarbonate filter and lubricator bowls (metal bowls standard on AFRL-8)
- 25-micron filter included on all models
- Regulating range: 7 – 125 PSI
- Custom order upgrade items include metal bowl, 5 micron filter, semi-automatic filter drain, and reduced PSI range regulator. Contact an AIMCO Customer Service Associate for more information, 1-503-254-6600, or toll free 1-800-852-1368



**AFRL-2-C
AFRL-3-C**

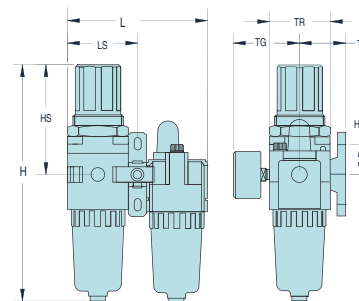

**AFRL-3
AFRL-4
AFRL-8**

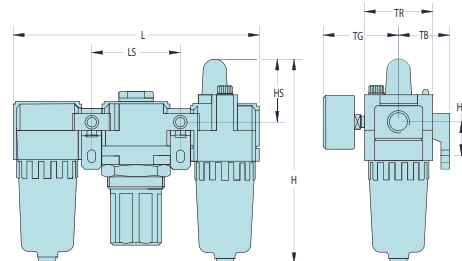


**28178
HT Air Tool/AFRL
Carrying Kit**



**AFRL-4HTA
Standalone Unit**

MODEL	PORT	GAUGE PORT	FLOW RATE CFM L/MIN	BOWL SHIELD	H IN/MM	HB IN/MM	HS IN/MM	L IN/MM	LS IN/MM	TB IN/MM	TG IN/MM	TR IN/MM
AFRL-2	1/4"	1/8"	70 2,000	yes	6.16 (156.5)	1.39 (35.3)	1.50 (38.1)	7.13 (181.1)	2.52 (64.0)	1.61 (41.0)	2.39 (60.7)	2.09 (53.1)
AFRL-2-C	1/4"	1/8"	60 1,700	yes	8.31 (211.1)	1.38 (35.1)	3.64 (92.5)	4.61 (117.1)	2.30 (58.4)	1.61 (40.9)	2.39 (60.7)	2.09 (53.1)
AFRL-3	3/8"	1/4"	140 4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-3-C	3/8"	1/4"	105 3,000	yes	10.31 (261.9)	1.57 (39.9)	4.41 (112.0)	6.06 (153.9)	3.03 (77.0)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-4	1/2"	1/4"	140 4,000	yes	7.54 (191.5)	1.57 (40.0)	1.61 (40.9)	9.37 (238.0)	3.31 (84.1)	1.97 (50.0)	2.58 (65.5)	2.76 (70.1)
AFRL-8	1"	1/4"	180 5,000	yes	10.69 (271.5)	1.97 (50.0)	1.89 (48.0)	11.81 (300.0)	4.13 (104.9)	2.75 (69.9)	2.97 (75.4)	3.54 (89.9)

AIR PREPARATION UNITS: BASIC FUNCTIONS

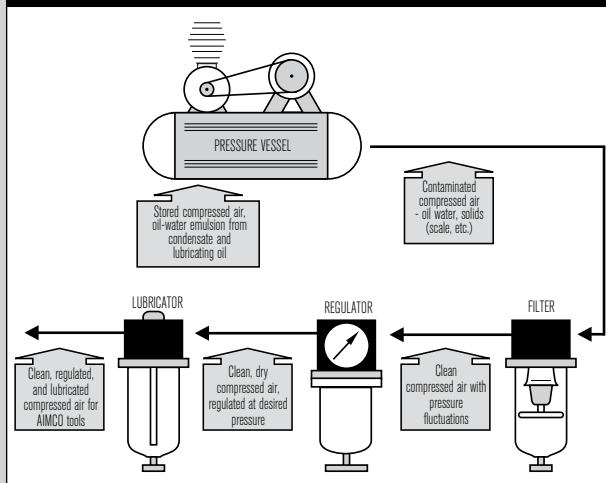

The supply of clean, dry air is essential to the operation of pneumatic powered tools. Use only clean filtered air for longer tool life. Provide proper airflow (CFM) and regulate air pressure (PSI) for optimum performance.

To determine unit size for application, you need to know:


- Total air flow (CFM) required for application
- Size of incoming air line and size of air line required by tool
- Air supply pressure (PSI)
- Allowable pressure drop
- Does the application require lubrication?
- Does the overall system have the required capacity?

AIR LINE

Polyurethane Hose



- Durable Polyurethane is chemical resistant and lightweight, and provides excellent recoil memory and maximum flexibility



- Available in transparent hose color (opaque also available)
- Assemblies for coiled hose include reusable swivel fitting. Straight hose available with or without fittings
- Working temperature: -104° F to 175° F

SINGLE AIR HOSE ASSEMBLIES (COILED)

MODEL	DESCRIPTION (O.D. x I.D. x LENGTH)	RETRACTED LENGTH	WORKING PRESSURE	NPT FITTINGS
ASH-250C-10MSZ	3/8" x 1/4" x 10'	7"	100 psi	1/4"
ASH-250C-15MSZ	3/8" x 1/4" x 15'	9-1/2"	100 psi	1/4"
ASH-250C-25MSZ	3/8" x 1/4" x 25'	15-1/2"	100 psi	1/4"
ASH-375C-15MSZ	9/16" x 3/8" x 15'	10"	100 psi	3/8"
ASH-375C-25MSZ	9/16" x 3/8" x 25'	14"	100 psi	3/8"
ASH-500C-15MSZ	3/4" x 1/2" x 15'	13"	100 psi	1/2"
ASH-500C-25MSZ	3/4" x 1/2" x 25'	23"	100 psi	1/2"

Custom length coil assemblies and special colors available in minimum order quantities. Contact an AIMCO Customer Service Associate, 1-503-254-6600, or toll free 1-800-852-1368.



STRAIGHT AIR HOSE (SOLD PER FOOT)

MODEL	DESCRIPTION
ASH-375Z	3/8" I.D.
ASH-500Z	1/2" I.D.

Contact an AIMCO Customer Service Associate about full reel pricing, 1-503-254-6600, or toll free 1-800-852-1368.

Rubber Hose



- Designed for use in a wide range of industrial, construction, and agricultural applications
- Constructed of high grade, reinforced EPDM synthetic rubber
- Working temperature: -40° F to 190° F

SINGLE AIR HOSE (RUBBER)

I.D.	O.D.	LENGTH	WORKING PRESSURE	WEIGHT
3/16"	0.44"	10 ft	200 psi	0.8 lb
1/4"	0.5"	10 ft	200 psi	0.9 lb
5/16"	0.58"	10 ft	200 psi	1.2 lb
3/8"	0.67"	10 ft	200 psi	1.5 lb
1/2"	0.81"	10 ft	200 psi	2.0 lb
5/8"	0.97"	10 ft	200 psi	2.7 lb
3/4"	1.12"	10 ft	200 psi	3.4 lb

Custom lengths available. Contact an AIMCO Customer Service Associate for more details, 1-503-254-6600, or toll free 1-800-852-1368.

HELPFUL HINTS FOR AIR HOSE USE

- Use recommended I.D. air hose and fittings
- Replace air hose regularly to help maintain clean air
- A clear hose allows you to see water or dirt accumulation in hose
- Use correct length of hose to reduce air loss and pressure drop
- Use locking quick-disconnect couplers for additional safety

AIR LINE ACCESSORIES

BRASS QUICK COUPLERS

Manual ball couplers designed for use with ergonomic twist plugs. Brass with nitrile seals, rated to 300 PSI, from -40° to +250° F.


MODEL	DESCRIPTION
B23	1/4" NPT F x 1/4" QC Brass Coupler
B23E	1/4" NPT F x 3/8" QC Brass Coupler
B25	3/8" NPT F x 3/8" QC Brass Coupler



SWIVEL AIR FITTINGS

For use with most portable air tools, including grinders, drills, screwdrivers, buffers, sanders, staple guns, and more. Rotates 360° for awkward angles.

MODEL	INLET	WEIGHT	MAX PSI	TOOL CFM
7021	1/4" NPT	3 oz	Up to 125	25
7041A	3/8" NPT	11 oz	Up to 125	50
7051	1/2" NPT	7 oz	Up to 125	60



IN-LINE MINI REGULATORS

Easily adjust airflow with the turn of a dial.

MODEL	CAPACITY
932-100-0	1/8" NPT
932-110-0A	1/4" NPT



AIR LINE FITTINGS

MODEL	CAPACITY
250-RZ	1/4" NPT Rigid Fitting
250-SZ	1/4" NPT Swivel Fitting
375-RZ	3/8" NPT Rigid Fitting
375-SZ	3/8" NPT Swivel Fitting
500-SZ	1/2" NPT Swivel Fitting



MINI AIR GAUGE SWIVEL JOINT KITS

- Bi-directional 360° rotation
- Keeps air hose straight and untwisted
- Decreases operator fatigue



MODEL	INLET	WEIGHT	MAX PSI	TOOL CFM
7021AG	1/4" NPT	3 oz	Up to 125	25
7041AG	3/8" NPT	3 oz	Up to 125	50

BRASS ADAPTERS AND BUSHINGS

Pipe fittings for use as medium and low pressure connectors. Meets functional requirements of SAE J530, SAE J531, ASME and ASA. Rated 1,000 PSI from -65° to +250° F.



MODEL	DESCRIPTION
209P-8-6	3/8" NPT F x 1/4" NPT M Adapter
222P-6-4	1/2" NPT F x 3/8" NPT M Adapter
222P-8-6	3/4" NPT F x 1/2" NPT M Adapter
209P-6-4	1/4" NPT F x 3/8" NPT M Bushing
209P-8-6	3/8" NPT F x 1/2" NPT M Bushing



ERGONOMIC TWIST PLUGS

These unique, ergonomically designed hose fittings provide 360° rotation and 35° angled rotation in any direction.

- Two rotation points prevent kinking of air hose
- Design ensures full air pressure flow
- Rotating joint comes with polyurethane dust cover
- Heavy duty construction

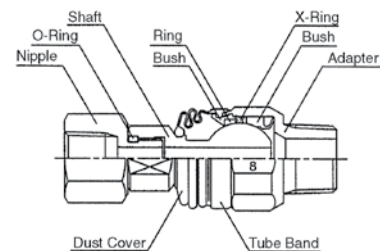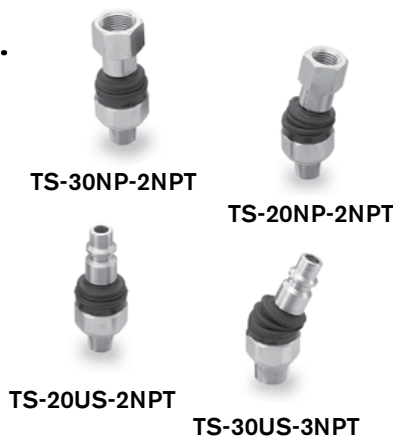

MODEL	DESCRIPTION
TS-30NP-2NPT	3/8" NPT Female x 1/4" NPT Male
TS-20NP-2NPT	1/4" NPT Female x 1/4" NPT Male
TS-20US-2NPT	1/4" US Plug x 1/4" NPT Male
TS-30US-3NPT	3/8" US Plug x 3/8" NPT Male


STANDARD FASTENER TOOLS

STANDARD FASTENER TOOLS

Connect your tool to the application with Bits, Sockets and Nutsetters from AIMCO.

AIMCO has assembled the most complete package of commonly used screwdriver bits and nutsetters in the industry. Our goal is to supply you with the highest quality bits and nutsetters for your fastener needs. Whether you're in electronics, aerospace, automotive, or general industry, AIMCO has the bits and nutsetters to fit your needs.

IMPACT SOCKETS

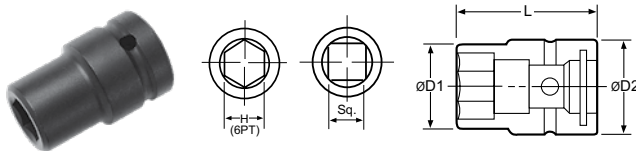

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

3/8" Square Drive							
A31/4	1/4"	10	0.39	19	0.75	34	1.34
A35/16	5/16"	12	0.47	19	0.75	34	1.34
A33/8	3/8"	15	0.59	19	0.75	34	1.34
A306	6 mm	10	0.39	19	0.75	34	1.34
A307	7 mm	13	0.49	20	0.79	32	1.26
A308	8 mm	14	0.55	20	0.79	32	1.26

3/8" Square Drive, Deep							
A307-2	7 mm	13	0.49	20	0.79	50	1.97
A307-2.75	7 mm	13	0.49	20	0.79	70	2.76
A308-2	8 mm	14	0.55	20	0.79	50	1.97

3/8" Square Drive, Magnetic							
A31/4MP	1/4"	10	0.39	19	0.75	34	1.34
A35/16MP	5/16"	12	0.47	19	0.75	34	1.34
A33/8MP	3/8"	15	0.59	19	0.75	34	1.34
A308MP	8 mm	14	0.55	20	0.79	32	1.26
A310MP	10 mm	17	0.65	20	0.79	32	1.26
A311MP	11 mm	17	0.65	19	0.75	34	1.34

1/2" Square Drive							
A43/8	3/8"	16	0.63	25	0.98	38	1.50
A47/16	7/16"	18	0.69	25	0.98	38	1.50
A41/2	1/2"	19	0.75	25	0.98	50	1.97
A408	8 mm	16	0.61	25	0.98	40	1.58
A409	9 mm	16	0.63	25	0.98	40	1.58
A410	10 mm	18	0.69	25	0.98	40	1.58

1/2" Square Drive, Deep							
A43/8-3.25	3/8"	17	0.67	25	0.98	82	3.23
A47/16-3.25	7/16"	19	0.73	25	0.98	82	3.23
A41/2-3.25	1/2"	22	0.85	25	0.98	82	3.23
A410-2	10 mm	18	0.69	25	0.98	50	1.97
A410-3	10 mm	18	0.69	25	0.98	75	2.95
A410-3.25	10 mm	17	0.67	25	0.98	82	3.23
A411-3.25	11 mm	19	0.73	25	0.98	82	3.23

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

1/2" Square Drive, Magnetic

A408MP	8 mm	16	0.61	25	0.98	40	1.58
A410MP	10 mm	18	0.69	25	0.98	40	1.58
A412MP	12 mm	21	0.81	25	0.98	40	1.58

3/4" Square Drive

A611/16	11/16"	30	1.18	44	1.73	50	1.97
A63/4	3/4"	32	1.26	44	1.73	50	1.97
A613/16	13/16"	35	1.38	44	1.73	50	1.97
A614	14 mm	24	0.95	38	1.50	55	2.17
A616	16 mm	27	1.06	44	1.73	50	1.97
A617	17 mm	30	1.18	38	1.50	55	2.17


3/4" Square Drive, Deep

A611/16-4	11/16"	31	1.22	44	1.73	100	3.94
A63/4-4	3/4"	33	1.30	44	1.73	100	3.94
A613/16-4	13/16"	36	1.42	44	1.73	100	3.94
A617-4	17 mm	31	1.22	44	1.73	100	3.94
A618-4	18 mm	32	1.26	44	1.73	100	3.94
A619-4	19 mm	33	1.30	38	1.50	100	3.94

1" Square Drive


A87/8	7/8"	37	1.46	54	2.13	59	2.32
A815/16	15/16"	38	1.50	54	2.13	59	2.32
A81	1"	41	1.61	54	2.13	59	2.32
A817	17 mm	31	1.22	50	1.97	63	2.48
A819	19 mm	33	1.30	50	1.97	63	2.48
A821	21 mm	37	1.46	50	1.97	63	2.48

QUICK CHANGE CHUCKS

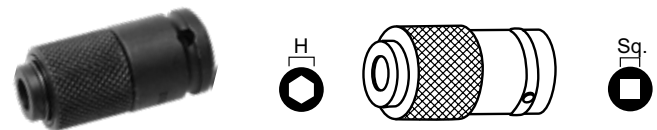

PART NO	SQ DRIVE	HEX	D1 MM	D1 IN	L MM	L IN
ADC-2S	1/4"	1/4"	19	0.75	38	1.50
ADC-3S	3/8"	1/4"	20	0.79	42	1.65
ADC-4S	1/2"	1/4"	19	0.75	46	1.81
ADC-3SH7/16Z	3/8"	7/16"	25	0.98	46	1.81
ADC-4SH7/16Z	1/2"	7/16"	33	1.30	55	2.17

ALLEN SOCKETS



PART NO	HEX	L1 MM	L1 IN	L MM	L IN
---------	-----	----------	----------	---------	---------

3/8" Square Drive


A31/4C	1/4"	10	0.39	42	1.65
A304C	4 mm	10	0.39	42	1.65

1/2" Square Drive

A41/4C	1/4"	25	0.98	50	1.97
A405C	5 mm	25	0.98	50	1.97

STANDARD FASTENER TOOLS


UNIVERSAL SOCKETS



PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
3/8" Square Drive							
A310U	10 mm	16	0.63	20	0.79	55	2.17
A311U	11 mm	16	0.63	20	0.79	60	2.36


1/2" Square Drive							
A412U	12 mm	20.5	0.81	25	0.98	70	2.76
A413U	13 mm	19	0.75	24	0.95	70	2.76

NUTSETTERS




PART NO	HEX	L MM	L IN
A3B1/4-2	1/4"	50	1.97
A3B1/4-2.5	1/4"	63	2.50
A3B5/16-2	5/16"	50	1.97
A3B5/16-2.5	5/16"	63	2.50
A3B3/8-2	3/8"	50	1.97
A3B3/8-2.5	3/8"	63	2.50
A3B05-2.75	5 mm	70	2.76
A3B55-1.2	5.5 mm	30	1.18
A3B55-2.75	5.5 mm	70	2.76
A3B55-4	5.5 mm	100	3.94
A3B06-2.75	6 mm	70	2.76
A3B07-1.2	7 mm	30	1.18
A3B07-2	7 mm	50	1.97
A3B07-2.75	7 mm	70	2.76
A3B07-4	7 mm	100	3.94
A3B08-1.2	8 mm	30	1.18
A3B08-2	8 mm	50	1.97
A3B08-2.75	8 mm	70	2.76
A3B08-4	8 mm	100	3.94
A3B08-6	8 mm	150	5.91
A3B08-8	8 mm	200	7.87
A3B09-2.75	9 mm	70	2.76
A3B09-4	9 mm	100	3.94
A3B10-1.2	10 mm	30	1.18
A3B10-2	10 mm	50	1.97
A3B10-2.75	10 mm	70	2.76
A3B11-2.75	11 mm	70	2.76
A3B12-1.2	12 mm	30	1.18
A3B13-2.75	13 mm	70	2.76
A3B14-2.75	14 mm	70	2.76
A3B16-2.75	16 mm	70	2.76
A3B17-2.75	17 mm	70	2.76

EXTENSIONS



PART NO	SQ DRIVE	HEX	L MM	L IN	D MM	D IN
A375E	3/8"	3/8"	75	2.95	20	0.79
A405E	1/2"	1/2"	51	2.01	30	1.18
A610E	3/4"	3/4"	100	3.94	44	1.73
A810E	1"	1"	102	4.02	54	2.13
A1220E	1-1/4"	1-1/4"	200	7.87	60	2.36
A1418E	1-1/2"	1-1/2"	178	7.01	84	3.31
A2426E	2-1/2"	2-1/2"	264	10.39	137	5.39

SOCKET ADAPTERS



PART NO	FEMALE SQ. DRIVE	MALE SQ. DRIVE	D MM	D IN	L MM	L IN
A302A	3/8"	1/4"	22	0.87	35	1.38
A403A	1/2"	3/8"	25	0.98	37	1.46
A504A	5/8"	1/2"	35	1.38	47	1.46
A604A	3/4"	1/2"	38	1.50	53	2.09
A806A	1"	3/4"	50	1.97	70	2.76
A128A	1-1/4"	1"	60	2.36	76	2.99
A#508A	Spline #5	1"	60	2.36	90	3.54

Bit and Nutsetter Part Number Nomenclature

Precedes Part Number

BITS	A7 = 7/16 Power Drive
A3S = Phillips® Power Drive	AS = Electric Type Phillips®
A3W = Double Ended Phillips®	AM = Electric Type Slotted Phillips®
A38S = Phillips® Insert	ATW = Electric Type Tri-Wing®
A39S = Phillips® Insert Reduced Nose	AT = Electric Hios Type Torx®
A3M = Slotted Power Drive	A26S = Electric Driver Phillips®
A38M = Slotted Insert	A26M = Electric Driver Slotted Phillips®
A3MT = Slotted Power Drive Reduced Nose	A26C = Electric Driver Allen Socket Head
A3C = Allen Socket Head Power Drive	A3BHM = Insert Bit Holder (Magnetic Type)
A38C = Allen Socket Head Insert	A3BHD = Insert Bit Holder (Non Magnetic)
A3R = Square Recess Power Drive	
A3RT = Square Recess Turned Down (Power)	NUTSETTERS
A38R = Square Recess Insert	A3B = Nutsetter
A3T = Torx® Power Drive	A3BMP = Magnetic (MP) Pressed Type
A38T = Torx® Insert	A3BMS = Magnetic (MS) Spring Loaded
A3TS = Torq-Set® Power Drive	A3BMT = Magnetic (MT) Tube Type
A38TS = Torq-Set® Insert	A3BU = Universal Nutsetter
A3TA = Triangle Power Drive	
A3TW = Tri-Wing® Power Drive	MAG-O-NETS
A38TW = Tri-Wing® Insert	AM = AIMCO Mag-O-Net®

Contained within Part Number

BITS
PZ = Pozidriv®
PZACR = Pozidriv® ACR®
SDV = Supadriv®
TR = Torx® Tamper Resistant
ACRI = ACR® Installation
ACR = ACR® Remove
ACRB = ACR® 4x4 Both Install and Remove
E4 = Electric 4mm diameter
E5 = Electric 5mm diameter
RS = Reduced Shank

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

STANDARD FASTENER TOOLS

MAG-O-NETS®: A Revolutionary Way to Convert Standard Bits to Magnetic Bits


FEATURES AND BENEFITS

- Easy, cost effective alternative to traditional magnetic bit holder and insert bit combination
- Improves torque transfer by eliminating “wobble effect”
- Easily adjust magnetic attraction by moving Mag-O-Net collar closer to or further from fastener
- Fits virtually any standard screwdriver bit
- Reusable and interchangeable – once a bit is worn out, simply remove your Mag-O-Net and slide it onto the next bit
- Lifetime guarantee on magnetic attraction




*U.S. Patent 5861789

PART NO	INNER DIAMETER (ID)	OUTER DIAMETER (OD)	L MM
AM1/4Z	7 mm	19 mm	10
AM5Z	6 mm	17.5 mm	10
AM3/16Z	3/16 in	17.5 mm	10




PHILLIPS POWER BITS



PART NO	POINT SIZE	L MM	L IN
A3S0-2	0	50	1.97
A3S1-2	1	50	1.97
A3S1-2.75	1	70	2.76
A3S1-3	1	75	2.95
A3S1-3.5	1	90	3.54
A3S1-4	1	100	3.94
A3S1-6	1	150	5.91
A3S2-1.2	2	30	1.18
A3S2-1.6	2	40	1.57
A3S3-2	3	50	1.97
A3S3-2.75	3	70	2.76

Double-Ended




A3W1-3	1	75	2.94
A3W1-4	1	100	3.94
A3W2-2	2	50	1.97
A3W2-3	2	75	2.94
A3W2-4	2	100	3.94
A3W2-6	2	150	5.91
A3W2-8	2	200	7.87
A3W2-10	2	250	9.84
A3W2-12	2	300	11.81
A3W3-2	3	50	1.97
A3W3-3	3	75	2.94
A3W3-4	3	100	3.94
A3W3-6	3	150	5.91
A3W3-8	3	200	7.87

TORX POWER BITS



PART NO	TORX SIZE	L MM	L IN
A3T6-2	T6	50	1.97
A3T7-2	T7	50	1.97
A3T7-2.75	T7	70	2.76
A3T7-3.5	T7	90	3.54
A3T7-6	T7	150	5.91
A3T8-2	T8	50	1.97
A3T9-2.75	T9	70	2.76

BIT HOLDERS



PART NO	L MM	L IN
1/4" Hex, Magnetic		
A3BHM-3	75	2.94
A3BHM-4	100	3.94
A3BHM-6	150	5.91
A3BHM-8	200	7.87
A3BHM-10	250	9.84

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.



ERGO-DRIVE SERIES

ERGO-DRIVE® SOCKETS PROTECT...



...YOUR INVESTMENT!

Pulse tools are an investment and the anvil is the most expensive single part of any pulse tool. ERGO-DRIVE sockets decrease vibration and wear on this critical component.

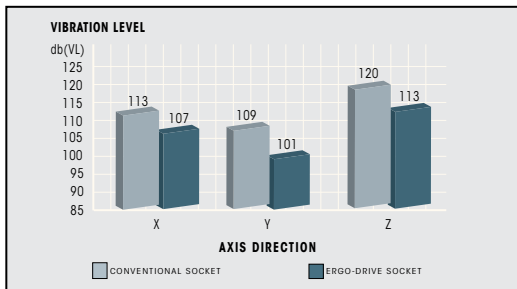


...YOUR ASSEMBLERS!


ERGO-DRIVE sockets cause significantly less vibration during fastening than conventional sockets. This allows your assemblers to do their jobs without the worry of vibration related injuries.

...YOUR PRODUCTS!

By reducing run-out and vibration, ERGO-DRIVE sockets allow the most repeatable, accurate rundowns to take place, ensuring excellent product quality.

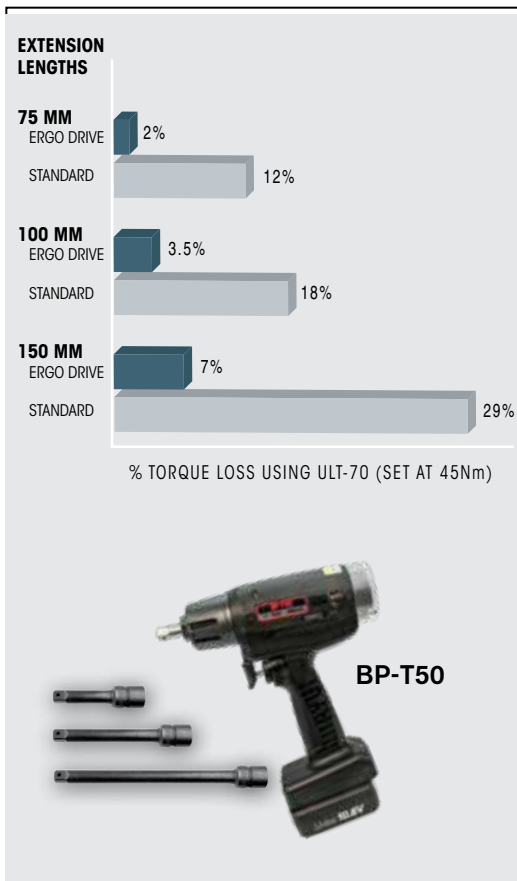


ERGO-DRIVE VS. STANDARD

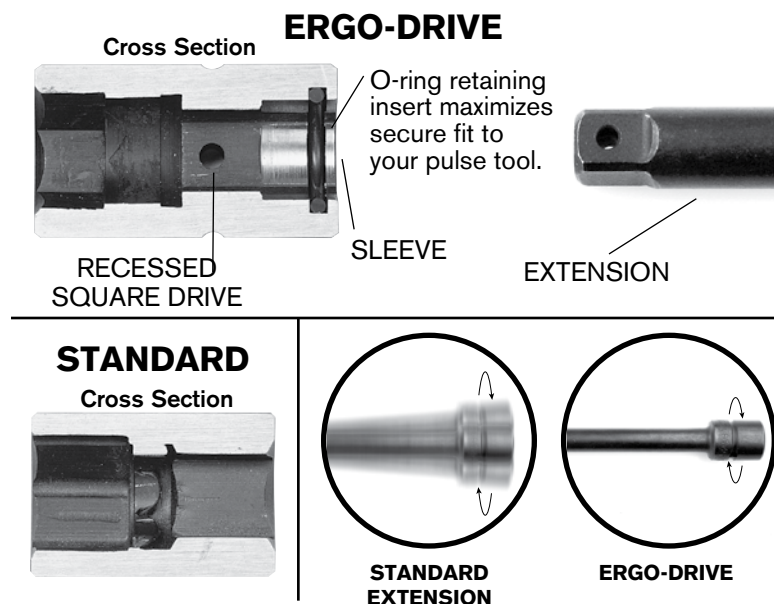

ERGO-DRIVE FASTENER TOOLS

ERGO-DRIVE SOCKETS

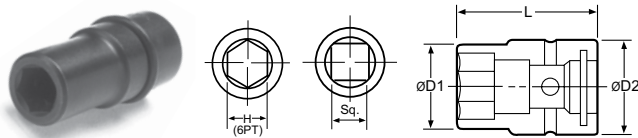

PART NO	HEX	D1 MM	D1 IN	D2 MM	D2 IN	L MM	L IN
---------	-----	----------	----------	----------	----------	---------	---------

3/8" Square Drive

A31/4EDS	1/4"	10	0.39	19	0.75	44	1.73
A31/2EDS	1/2"	20	0.77	22	0.87	44	1.73
A306EDS	6 mm	10	0.39	19	0.75	44	1.73
A308EDS	8 mm	14	0.55	20	0.79	42	1.65
A310EDS	10 mm	17	0.65	20	0.79	42	1.65
A312EDS	12 mm	20	0.79	20	0.79	42	1.65
A314EDS	14 mm	22	0.87	20	0.79	42	1.65
A316EDS	16 mm	25	0.98	20	0.79	45	1.77
A318EDS	18 mm	27	1.06	20	0.79	45	1.77

1/2" Square Drive

A41/2EDS	1/2"	19	0.75	25	0.98	50	1.97
A413EDS	13 mm	22	0.85	25	0.98	52	2.05
A414EDS	14 mm	23	0.89	25	0.98	52	2.05
A415EDS	15 mm	24	0.93	25	0.98	52	2.05
A416EDS	16 mm	25	0.98	25	0.98	52	2.05
A417EDS	17 mm	28	1.10	28	1.10	54	2.13
A418EDS	18 mm	29	1.14	28	1.10	54	2.13
A419EDS	19 mm	30	1.18	28	1.10	54	2.13


3/4" Square Drive

A61-1/8EDS	1-1/8"	44	1.73	44	1.73	64	2.52
A61-1/4EDS	1-1/4"	49	1.91	44	1.73	66	2.60
A61-1/2EDS	1-1/2"	57	2.24	44	1.73	68	2.68
A618EDS	18 mm	31	1.22	44	1.73	60	2.36
A624EDS	24 mm	40	1.52	40	1.73	65	2.36

1" Square Drive

A815/16EDS	15/16"	38	1.50	54	2.13	69	2.72
A8100EDS	100 mm	136	5.35	76	2.99	120	4.72

ERGO-DRIVE EXTENSIONS

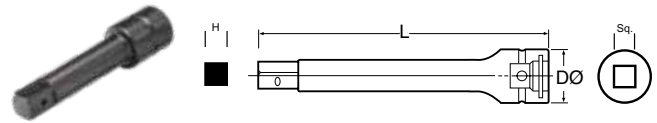

PART NO	SQ DRIVE	H	L MM	L IN	D MM	D IN
---------	-------------	---	---------	---------	---------	---------

3/8" Square Drive

A352EDE	3/8"	3/8"	52	2.05	20	0.79
A3100EDE	3/8"	3/8"	100	3.94	20	0.79
A375EDE	3/8"	3/8"	75	2.95	20	0.79
A3150EDE	3/8"	3/8"	150	5.91	20	0.79
A3190EDE	3/8"	3/8"	190	7.48	20	0.79
A3254EDE	3/8"	3/8"	254	10.00	20	0.79
A3300EDE	3/8"	3/8"	300	11.81	20	0.79
A3320EDE	3/8"	3/8"	320	12.60	20	0.79

1/2" Square Drive

A464EDE	1/2"	1/2"	64	2.52	28	1.10
A476EDE	1/2"	1/2"	76	2.99	28	1.10
A4125EDE	1/2"	1/2"	125	4.92	28	1.10
A4204EDE	1/2"	1/2"	204	8.03	28	1.10
A4254EDE	1/2"	1/2"	254	10.00	28	1.10
A4355EDE	1/2"	1/2"	355	13.98	28	1.10


3/4" Square Drive

A676EDE	3/4"	3/4"	76	2.99	40	1.58
A6100EDE	3/4"	3/4"	100	3.94	40	1.58
A6150EDE	3/4"	3/4"	150	5.91	40	1.58
A6200EDE	3/4"	3/4"	200	7.87	40	1.58

1" Square Drive

A8150EDE	1"	1"	150	5.91	54	2.13
A8200EDE	1"	1"	200	7.87	54	2.13

ERGO-DRIVE QUICK CHANGE CHUCKS



PART NO	SQUARE DRIVE	HEX
---------	--------------	-----

3/8" Square Drive

ADC-3SEDSQ	3/8"	1/4"
ADC-3SEDSQH7/16	3/8"	7/16"

1/2" Square Drive

ADC-4SEDSQ	1/2"	1/4"
ADC-4SEDSQH7/16	1/2"	7/16"

Additional types and sizes of fastener tools, as well as custom parts, are available upon request. Contact an AIMCO Customer Service Associate at 1-503-254-6600, or toll free 1-800-852-1368.

CUSTOM BITS, SOCKETS, AND EXTENSIONS

CUSTOM BITS, SOCKETS, AND EXTENSIONS FOR THE POWER TOOL USER


AIMCO can provide specials for virtually any application. From design to delivery, AIMCO's quick response ensures high quality, tight tolerance specials.

Specials are available in every style including:

- Deep Socket
- Extended Socket
- Universal
- Allen Head
- Torx Head
- Socket Adapter
- Nut Runner Socket
- Nut Runner Joint
- Nutsetter
- Magnetic Nutsetter
- Universal Nutsetter
- Screwdriver Bits



Sample request forms are shown. Your detailed requirements will allow AIMCO to quickly respond with custom solutions for your fastening requirements.



MAGNET		
MP	MT	MS
•	•	•

SOCKET

	H	L	L ₁	L ₂	A	ØC	ØD ₁	ØD ₂	Sq.
SIZE	•	•	•	•	•	•	•	•	•
TYPE	•	•	•	•	•	•	•	•	•

SPECIAL PARTS

SOCKET TYPES



DOUBLE HEX
D (12 PT)
(DH)



SURFACE DRIVE
(SF)



DOUBLE SQUARE
(DSQ)



FLANK DRIVE
(FD)



SINGLE HEX
H (6 PT)
(SH)




FAST LEAD
(FL)



SINGLE SQUARE
(SQ)



HEX LOBULE
(TORX)

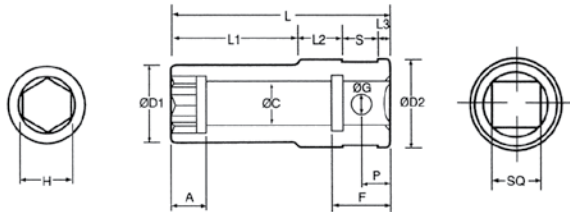


NUTRUNNER SOCKET TYPE A

Min. Qty. 10

Magnet MP MT MS	H	L	L ₁	L ₂	L ₃	S	ØD ₁	A	ØC	ØG	P	F	ØD ₂	Sq.	Qty.
	SIZE														
	TYPE														



✓ Box for Ergo-Drive

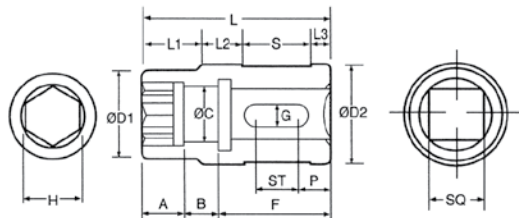

NUTRUNNER SOCKET TYPE B

Min. Qty. 10

H	L	L ₁	L ₂	L ₃	S	ØD ₁	A	B	ØC	G	P	F	ST	ØD ₂	Sq.	Qty.
SIZE																
TYPE																

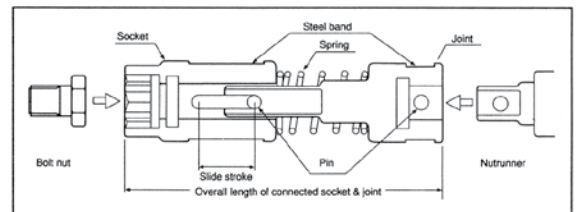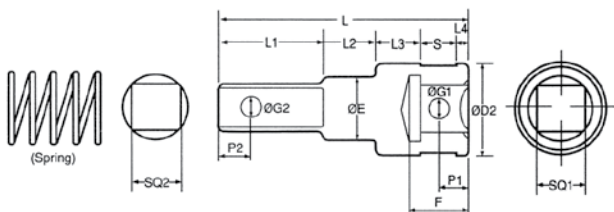


NUTRUNNER JOINT TYPE B

Min. Qty. 10

SQ ₂	L	L ₁	L ₂	L ₃	L ₄	S	P ₁	ØG ₂	ØE	F	ØG ₁	P ₂	ØD ₂	SQ ₁	Qty.

✓ Box for Ergo-Drive

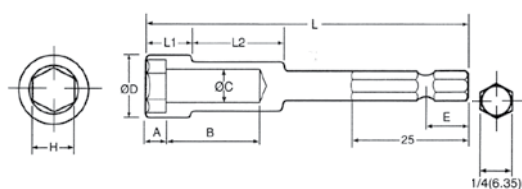

NUT SETTER


Min. Qty. 10

H	ØD	L	E	L ₁	L ₂	A	B	ØC	Qty.
SIZE									
TYPE									


SPECIAL PARTS

MAGNETIC STYLES:



MP (Press-inserted) Type



MS (Sliding) Type



MT (Tube) Type




SOCKET

Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	ØC	ØD ₁	ØD ₂	Sq.	Qty.
MP MT MS			SIZE									
			TYPE									

✓ Box for Ergo-Drive

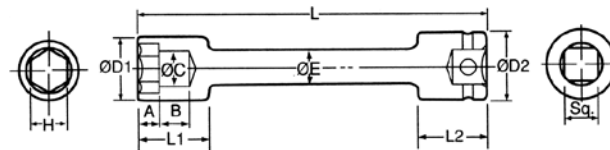


EXTENSION SOCKET

Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	B	ØC	ØD ₁	ØD ₂	ØE	Sq.	Qty.
MP MT MS			SIZE											
			TYPE											

✓ Box for Ergo-Drive

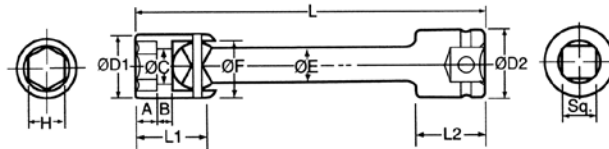

UNIVERSAL SOCKET


Min. Qty. 10

Magnet			H	L	L ₁	L ₂	A	B	ØC	ØD ₁	ØD ₂	ØE	ØF	Sq.	Qty.
MP MT MS			SIZE												
			TYPE												

✓ Box for Ergo-Drive

ALLEN HEAD/TORX HEAD

Min. Qty. 10

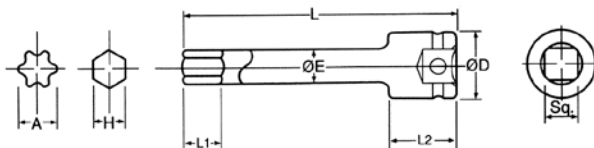


Torx	H	L	L ₁	L ₂	ØD	ØE	Sq.	Qty.

✓ Box for Ergo-Drive

SOCKET ADAPTER

Min. Qty. 10

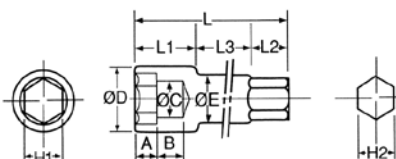


H ₁	L	L ₁	L ₂	L ₃	ØD	A	B	ØC	ØE	H ₂	Qty.
SIZE											
TYPE											

SPECIAL PARTS

(MP) MAGNETIC NUT SETTER


Min. Qty. 10

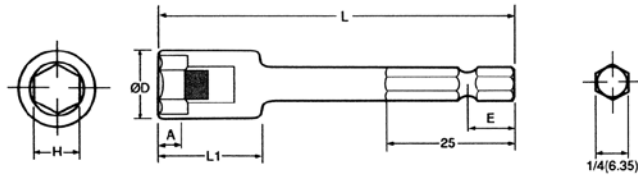

	H	L	E	L ₁	øD	A	Qty.
SIZE							
TYPE							

(MS) MAGNETIC NUT SETTER


Min. Qty. 10

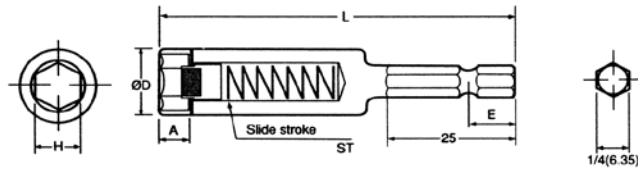

	H	L	E	øD	A	ST	Qty.
SIZE							
TYPE							

(MT) MAGNETIC NUT SETTER


Min. Qty. 10

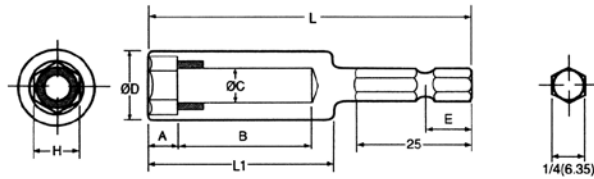

	H	L	E	L ₁	øD	A	B	øC	Qty.
SIZE									
TYPE									

UNIVERSAL NUT SETTER


Min. Qty. 10

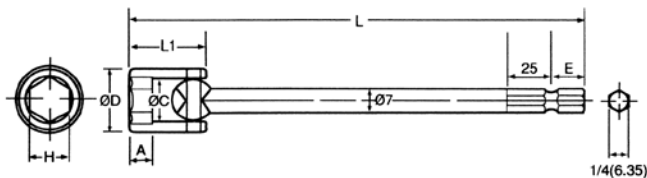

	H	L	E	L ₁	A	øC	øD	Qty.

SCREWDRIVER BIT

Min. Qty. 500



Point Size	L	L ₁	L ₂	øD ₁	øD ₂	E	H	Qty.

CIRCLE ONE:



Phillips®



Slotted



Torx®



Torx®
Tamper Resistant



Pozidriv®



Supadriv®



Square Recess



Allen Head



Torq-Set®



Tri-Wing®

CONVERSION CHARTS

Fraction ■ Decimal ■ Metric Conversions (to .32)

	DECIMAL	MM		DECIMAL	MM		DECIMAL	MM		DECIMAL	MM
1/32	.03125	.7938	9/32	.28125	7.1438	17/32	.53125	13.4938	25/32	.78125	19.8438
1/16	.0625	1.5875	5/16	.3125	7.9375	9/16	.5625	14.2875	13/16	.8125	20.6375
3/32	.09375	2.3812	11/32	.34375	8.7312	19/32	.59375	15.0812	27/32	.84375	21.4312
1/8	.125	3.175	3/8	.375	9.525	5/8	.625	15.875	7/8	.875	22.225
5/32	.15625	3.9688	13/32	.40625	10.3188	21/32	.65625	16.6688	29/32	.90625	23.0188
3/16	.1875	4.7625	7/16	.4375	11.1125	11/16	.6875	17.4625	15/16	.9375	23.8125
7/32	.21875	5.5562	15/32	.46875	11.9062	23/32	.71875	18.2562	31/32	.96875	24.6062
1/4	.25	6.35	1/2	.5	12.7	3/4	.75	19.05	1	1.0	25.4

Thread Size to Hex Size



	MM		MM	UNC	INCHES	SAE	INCHES
M 2	4	M 27	41	1/4	7/16	1/4	7/16
M 2.3	4.5	M 30	46	5/16	1/2	5/16	1/2
M 2.6	5	M 33	50	3/8	9/16	3/8	9/16
M 3	5.5	M 36	55	7/16	11/16	7/16	5/8
M 3.5	6	M 39	60	1/2	3/4	1/2	3/4
M 4	7	M 42	65	9/16	7/8	9/16	7/8
M 5	8	M 45	70	5/8	15/16	5/8	15/16
(M 5-6)	9	M 48	75	3/4	1-1/8	3/4	1-1/16
M 6	10	M 52	80	7/8	1-5/16	7/8	1-1/4
M 7	11	M 56	85	1	1-1/2	1-1/8	1-7/16
M 8	13	M 60	90	1-1/8	1-11/16	1-1/4	1-13/16
(M 8)	14	M 64	95	1-1/4	1-7/8	1-3/8	2
M 10	16	M 68	100	1-3/8	2-1/16	1-1/2	2-3/16
(M 10)	17	M 72	105	1-1/2	2-1/4		
M 12	18	M 76	110	1-3/4	2-5/8		
(M 12)	19	M 80	115	2	3		
M 14	21	M 85	120	2-1/4	3-3/8		
(M 14)	22	M 90	130	2-1/2	3-3/4		
M 16	24	M 95	135				
M 18	27	M 100	145				
M 20	30	M 105	150				
(M 22)	32	M 110	155				
M 22	34	M 115	165				
M 24	36	M 120	170				

Torque Conversion Factors

UNITS TO BE CONVERTED		SAE			METRIC		INTERNATIONAL SYSTEM - S.I.		
	OZF-IN	LBF-IN	LBF-FT	GF-CM	KGF-CM	KGF-M	MNM	CNM	NM
1 ozf-in	= 1	0.0625	0.005	72	0.072	0.0007	7.062	0.706	0.007
1 lbf-in	= 16	1	0.083	1152.1	1.152	0.0115	113	11.3	0.113
1 lbf-ft	= 192	12	1	13826	13.83	0.138	1356	135.6	1.356
1 gf-cm	= 0.014	0.0009	0.00007	1	0.001	0.00001	0.098	0.01	0.0001
1 kgf-cm	= 13.89	0.868	0.072	1000	1	0.01	98.07	9.807	0.098
1 kgf-m	= 1389	86.8	7.233	100000	100	1	9807	980.7	9.807
1 mN-m	= 0.142	0.009	0.0007	10.2	0.01	0.0001	1	0.1	0.001
1 cN-m	= 1.42	0.088	0.007	102	0.102	0.001	10	1	0.01
1 N-m	= 141.6	8.851	0.738	10197	10.20	0.102	1000	100	1

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
A									
A128A	144	A352-1.2	145	A61-1/2EDS	147	ACA40-2000	136	ADC-45H7/16Z	143
A1220E	144	A352-1.6	145	A61-1/4EDS	147	ACA40-2500	136	AD-D1098-P	132
A1418E	144	A353-2	145	A61-1/8EDS	147	ACA80-1500	136	AD-D1098-PAC	132
A-2100	129	A353-2.75	145	A63/4	143	ACA80-2000	136	AD-D1098-PACE	132
A2426E	144	A3T6-2	145	A63/4-4	143	ACA80-2500	136	AD-D1098-S	132
A31/2EDS	147	A3T7-2	145	A604A	144	ACA150-1500	136	AD-D1098-SAC	132
A31/4	143	A3T7-2.75	145	A610E	144	ACA150-2000	136	ADW-0010K	79
A31/4C	143	A3T7-3.5	145	A611/16	143	ACA150-2500	136	ADW-0075K	79
A31/4EDS	147	A3T7-6	145	A611/16-4	143	ACA220-1500	136	ADW-0180K	79
A31/4MP	143	A3T8-2	145	A613/16	143	ACA220-2000	136	ADW-0270K	79
A33/8	143	A3T9-2.75	145	A613/16-4	143	ACA220-2500	136	ADW-0500K	79
A33/8MP	143	A3W1-3	145	A614	143	ACAH-15	137	ADW-1400F	79
A35/16	143	A3W1-4	145	A616	143	ACAH-15-MPE2745	137	ADW-DS	79
A35/16MP	143	A3W2-2	145	A617	143	ACAH-40-80	137	AE-224PS	121
A302A	144	A3W2-3	145	A617-4	143	ACAH-40PS1000	137	AE-278PS	121
A304C	143	A3W2-4	145	A618-4	143	ACAH-80PS3-5000	137	AE-2015	120
A306	143	A3W2-6	145	A618EDS	147	ACAH-150-220	137	AE-2020	119
A306EDS	147	A3W2-8	145	A619-4	143	ACAH-150PS3-5000	137	AE-2045A	121
A307	143	A3W2-10	145	A624EDS	147	ACAH-4080-MPE2745	137	AE-4020	119
A307-2	143	A3W2-12	145	A676EDE	147	ACAH-150220-MPE4070	137	AE-4520	119
A307-2.75	143	A3W3-2	145	A6100EDE	147	ACAH-S154080	137	AE-4520ESD	119
A308	143	A3W3-3	145	A6150EDE	147	ACAH-SL15150	137	AE-5681	119
A308-2	143	A3W3-4	145	A6200EDE	147	ACAH-TT-15A-3060	137	AE-5681ESD	119
A308EDS	147	A3W3-6	145	A81	143	ACAH-TT-15S-2745	137	AE-6300	120
A308MP	143	A3W3-8	145	A87/8	143	ACAH-TT-40S-2745	137	AE-6300M	120
A310EDS	147	A41/2	143	A806A	144	ACAH-TT-4080A-3165	137	AE-6300S	120
A310MP	143	A41/2-3.25	143	A810E	144	ACA-P2BK-4	137	AE-6450	120
A310U	144	A41/2EDS	147	A815/16	143	ACA-P2BK-6	137	AE-6450S	120
A311MP	143	A41/4C	143	A815/16EDS	147	ACA-P2BK-8	137	AE-7010	119
A311U	144	A43/8	143	A817	143	ACA-P2BK-10	137	AE-7010PS	119
A312EDS	147	A43/8-3.25	143	A819	143	ACA-P2BK-14	137	AE-7080A	121
A314EDS	147	A47/16	143	A821	143	ACA-P215-1000	136	AE-8010	119
A-315V	129	A47/16-3.25	143	A8100EDS	147	ACA-P215-1500	136	AE-8010PS	119
A316EDS	147	A403A	144	A8150EDE	147	ACA-P215-2000	136	AE-8681	119
A318EDS	147	A405C	143	A8200EDE	147	ACA-P240-1000	136	AEC5-2	138
A352EDE	147	A405E	144	AAP1B66400A	93	ACA-P240-1500	136	AED4A66250B	28
A375E	144	A408	143	AAP1B66600A	93	ACA-P240-2000	136	AED4A66425B	28
A375EDE	147	A408MP	143	AAP1B66850A	93	ACA-P240-2500	136	AED4A66625B	28
A3100EDE	147	A409	143	AAP1B76950A	93	ACA-P280-1500	136	AED4A66925B	28
A3150EDE	147	A410	143	AAP1B771350A	93	ACA-P280-2000	136	AED4A771200B	28
A3190EDE	147	A410-2	143	AAP1B772000A	93	ACA-P280-2500	136	AED4A773000B	28
A3254EDE	147	A410-3	143	AAP1B772950A	93	ACA-P2150-1500	136	AED4A884200B	28
A3300EDE	147	A410-3.25	143	AAP1B885100A	93	ACA-P2150-2000	136	AED4A884200B1	28
A3320EDE	147	A410MP	143	AAP2B76250A(R)	94	ACA-P2150-2500	136	AED4A885000B	28
A3B1/4-2	144	A411-3.25	143	AAP2B76450A(R)	94	ACA-P2220-1500	136	AED4A896500B	28
A3B1/4-2.5	144	A412MP	143	AAP2B76650A(R)	94	ACA-P2220-2000	136	AED4A898100B	28
A3B3/8-2	144	A412U	144	AAP2B76950A(R)	94	ACA-P2220-2500	136	AED4B898100B	28
A3B3/8-2.5	144	A413EDS	147	AAP2B771400A(R)	94	ACA-POSIX	136	AED4B66625B	28
A3B05-2.75	144	A413U	144	AAP2B772000A(R)	94	ACA-V15-1000	136	AEF35075A(V)(VB)(-2)(B-2)	23
A3B5/16-2	144	A414EDS	147	AAP2B773000A(R)	94	ACA-V15-1500	136	AEF35090A(V)(VB)(-2)(B-2)	23
A3B5/16-2.5	144	A415EDS	147	AAP2B785100A(R)	94	ACA-V15-2000	136	AEF35110A(V)(VB)(-2)(B-2)	23
A3B06-2.75	144	A416EDS	147	AB-3	138	ACA-V40-1000	136	AEF35135A(V)(VB)(-2)(B-2)	23
A3B07-1.2	144	A417EDS	147	AB-3/5	138	ACA-V40-1500	136	AEF35170A(V)(VB)	23
A3B07-2	144	A418EDS	147	AB-5	138	ACA-V40-2000	136	AEF35280A(B)	23
A3B07-2.75	144	A419EDS	147	AB-B1825LI	41	ACA-V40-2500	136	AEF35350A(B)	23
A3B07-4	144	A464EDE	147	AB-B1850LI	41	ACA-V80-1500	136	AEF35420A(B)	23
A3B08-1.2	144	A476EDE	147	AB-C18-4W	41	ACA-V80-2000	136	AEF35515A(B)	23
A3B08-2	144	A4125EDE	147	AB-C18110	41	ACA-V80-2500	136	AEF35635A(B)	23
A3B08-2.75	144	A4204EDE	147	AB-C18220	41	ACA-V150-1500	136	AEF4A66250B	28
A3B08-4	144	A4254EDE	147	ABG860-KIT	96	ACA-V150-2000	136	AEF4A66425B	28
A3B08-6	144	A4355EDE	147	ABG1400-KIT	96	ACA-V150-2500	136	AEF4A66625B	28
A3B08-8	144	A-50A-0	128	ABG2200-KIT	96	ACA-V220-1500	136	AEF4A66925B	28
A3B09-2.75	144	A-50A-1.7	128	ABG2800-KIT	96	ACA-V220-2000	136	AEF4A771200B	28
A3B09-4	144	A-50ARB-T-0	128	ABG3200-KIT	96	ACA-V220-2500	136	AEF4A773000B	28
A3B10-1.2	144	A-50ARB-T-1.7	128	ABG4100-KIT	96	ACPTT-V15-510 150	137	AEF4A884200B	28
A3B10-2	144	A-50ARBTC-0	128	ABG-B1852	96	ACPTT-V15-710 300	137	AEF4A884200B1	28
A3B10-2.75	144	A-50ARBTC-1.7	128	ABG-C110	96	ACPTT-V40-510 150	137	AEF4A885000B	28
A3B11-2.75	144	A-50B-1	128	ABG-C220	96	ACPTT-V40-760 300	137	AEF4A896500B	28
A3B12-1.2	144	A-50B-2	128	ABN-CTA10(W)(B)(WB)	40	ACPTT-V40-1410 600	137	AEF4A898100B	28
A3B13-2.75	144	A-50B-3	128	ABN-CTA12(W)(B)(WB)	40	ACPTT-V80-810 300	137	AEF4(A)(B)66250B	30
A3B14-2.75	144	A-50B-4	128	ABN-CTA20(W)(B)(WB)	40	ACPTT-V80-1410 600	137	AEF4(A)(B)66425B	30
A3B16-2.75	144	A-50BRBT-1	128	ABN-CTA30(W)(B)(WB)	40	ACSA-600-1500	137	AEF4(A)(B)66625B	30
A3B17-1.2	144	A-50BRBT-2	128	ABN-CTA55(W)(B)(WB)	40	ACSA-800-1500	137	AEF4(A)(B)66925B	30
A3B55-1.2	144	A-50BRBT-3	128	ABN-CTA90(W)(B)(WB)	40	ACSA-1000-1500	137	AEF4(A)(B)771200B	30
A3B55-2.75	144	A-50BRBT-4	128	ABN-CTA120(W)(B)(WB)	40	ACCTT-V15-600 150	137	AEF4(A)(B)773000B	30
A3B55-4	144	A-50BRBTC-1	128	ABP-CTA11Q(WQ)(BQ)(WBQ)	40	ACCTT-V15-800 300	137	AEF4(A)(B)884200B1DL	30
A3BHM-3	145	A-50BRBTC-2	128	ABP-CTA14Q(WQ)(BQ)(WBQ)	40	ACCTT-V40-600 150	137	AEF4(A)(B)884200B	30
A3BHM-4	145	A-50BRBTC-3	128	AB5-CTA11Q(WQ)(BQ)(WBQ)	40	ACCTT-V40-850 300	137	AEF4(A)(B)885000B	30
A3BHM-6	145	A-50BRBTC-4	128	AB5-CTA14Q(WQ)(BQ)(WBQ)	40	ACCTT-V40-1500 600	137	AEF4(A)(B)896500B	30
A3BHM-8	145	A-50C-6	128	ABT-3	138	ACCTT-V80-900 300	137	AEF4(A)(B)898100B	30
A3BHM-10	145	A-50C-8	128	ABT-5	138	ACCTT-V80-1500 600	137	AEF4(A)(B)8X12000B	30
A350-2	145	A-50C-10	128	ABT5-R	138	ACCTT-V80-2100 900	137	AEF4(A)(C)(X)12003B(B)(Q)	18
A351-2	145	A-50CRBT-6	128	ABT-CTA20W	40	ADC-25	143	AEF4(A)(C)(X)12006B(B)(Q)	18
A351-2.75	145	A-50CRBT-8	128	ACA10-1000	136	ADC-35	143	AEF4(A)(C)(X)12011B(B)(Q)	18
A351-3	145	A-50CRBT-10	128	ACA10-1500	136	ADC-35EDSQ	147	AEF4(A)(C)(X)12014B(B)(Q)	18
A351-3.5	145	A-50CRBTC-6	128	ACA15-1000	136	ADC-35EDSQH7/16	147	AEF4(A)(C)(X)12018B(B)	18
A351-4	145	A-50CRBTC-8	128	ACA15-1500	136	ADC-35H7/16Z	143	AEF4(A)(C)(X)12022B(B)	18
A351-6	145	A-50CRBTC-10	128	ACA15-2000	136	ADC-45	143	AEF35170A(-2)(B-2)	23
		A504A	144	ACA40-1000	136	ADC-45EDSQ	147	AH32025C(-1,2)	25
		A#508A	144	ACA40-1500	136	ADC-45EDSQH7/16	147	AH32030C(-1,2)	25

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
AEH32040C(-1,2)	25	AEP4(A)(R)(T)12011BR	27	AES4A66925B	28	AM-OIL	45	ARTIS-25S-20T(A)	88
AEH33042C(-1,2)	25	AEP4(A)(R)(T)12014BR	27	AES4A771200B	28	AMP-5	138	ARTIS-38S-25T(A)	88
AEH33053C(-1,2)	25	AEP4(A)(R)(T)12018BR	27	AES4A773000B	28	AMPST-2-I	37	ARTIS-100S-750T(A)	88
AEH33060C(-1,2)	25	AEP4(A)(R)(T)12022BR	27	AES4A884200B	28	AMPST-2-U	37	ASB-OC	130
AEH33090C(-1,2)	25	AEP4(A)(R)(T)22020BR	27	AES4A884200B1	28	AMPST-4-I	37	ASB-3C	130
AEH33120C(-1,2)	25	AEP4(A)(R)(T)22030BR	27	AES4A885000B	28	AMPST-4-U	37	ASB-5C	130
AEH33200C(-1,2)	25	AEP4(A)(R)(T)22040BR	27	AES4A896500B	28	AMPST-6-I	37	ASC-3	138
AEH35140B(-1,2)	25	AEP4A8X12000B	28	AES4A898100B	28	AMPST-6-U	37	ASC-5	138
AEH35175B(-1,2)	25	AEP4A66250B	28	AES4A898100B	28	AMPST-6S-I	37	ASH-250C-10MSZ	141
AEH4F12020B(-1,2)	25	AEP4A66425B	28	AES4A(B)66250BDL(L,R)	30	AMPST-6S-U	37	ASH-250C-15MSZ	141
AEH4F12026B(-1,2)	25	AEP4A66625B	28	AES4A(B)66625BDL(L,R)	30	AMPST-8-I	37	ASH-250C-25MSZ	141
AEH35090B(-1,2)	25	AEP4A66925B	28	AES4A(B)66925BDL(L,R)	30	AMPST-8-IL	37	ASH-375C-15MSZ	141
AEH35225B(-1,2)	25	AEP4A771200B	28	AES4A(B)771200BDL(L,R)	30	AMPST-8-U	37	ASH-375C-25MSZ	141
AEH35285B(-1,2)	25	AEP4A773000B	28	AES4A(B)773000BDL(L,R)	30	APM-30	121	ASH-375Z	141
AEH35350B(-1,2)	25	AEP4A884200B	28	AES4A(B)884200B1DL(L,R)	30	APTH-120E7	82	ASH-500C-15MSZ	95, 141
AEJ4A8X12000B	28	AEP4A884200B1	28	AES4A(B)884200BDL(L,R)	30	APTH-120E8	82	ASH-500C-25MSZ	95, 141
AEJ4A66250B	28	AEP4A885000B	28	AES4A(B)885000BDL(L,R)	30	APTH-120E9	82	ASH-500Z	95, 141
AEJ4A66425B	28	AEP4A896500B	28	AES4A(B)896500BDL(L,R)	30	APTH-120E10	82	ASTIS-25D-11	89
AEJ4A66625B	28	AEP4A898100B	28	AES4A(B)898100BDL(L,R)	30	APTH-120E11	82	ASTIS-25D-28	89
AEJ4A66925B	28	AEP4A(B)66250BDL	30	AES-5	138	APTH-120E12	82	ASTIS-38D-135	89
AEJ4A771200B	28	AEP4A(B)66425BDL	30	AES33150C-2	22	APTH-120E13	82	ASTIS-50D-270	89
AEJ4A773000B	28	AEP4A(B)66625BDL	30	AES33230C-2	22	APTH-120E14	82	ASTIS-75D-1000	89
AEJ4A884200B	28	AEP4A(B)66925BDL	30	AET32020C(DL)	24	APTH-120E15	82	ASTIS-100D-1700	89
AEJ4A884200B1	28	AEP4A(B)771200BDL	30	AET32025C(DL)	24	APTH-120E16	82	ASTIS-100S-3000	89
AEJ4A885000B	28	AEP4A(B)773000BDL	30	AET32035C(DL)	24	APTH-120E17	82	AT3-3	138
AEJ4A896500B	28	AEP4A(B)884200B1DL	30	AET32050C(DL)	24	APTH-120E18	82	AT3-4	138
AEJ4A898100B	28	AEP4A(B)884200BDL	30	AET4A12025B-KD	24	APTH-120E19	82	AT3-6	138
AEJ4A(B)898100BDL	30	AEP4A(B)885000BDL	30	AET4AA12018B	24	APTH-120E20	82	AT3-9	138
AEJ488X12000B	28	AEP4A(B)896500BDL	30	AET4AB12025B	24	APTH-12RT25	82	AT3-13	138
AEJ4866250B	28	AEP4A(B)898100BDL	30	AE-TC2040	121	APTH-12RT38	82	AT5-4	138
AEJ4866425B	28	AEP4A(R)(T)12003B(V)(Q)	20	AE-TC7080	121	APTH-12RT50	82	AT5-6	138
AEJ4866625B	28	AEP4A(R)(T)12006B(V)(Q)	20	AFRL-4	93, 140	APTH-12SD25	82	AT5-9	138
AEJ4866925B	28	AEP4A(R)(T)12011B(V)(Q)	20	AFRL-4HTA	93, 140	APTH-12SD38	82	AT5-12	138
AEJ48771200B	28	AEP4A(R)(T)12014B(V)(Q)	20	AFRL-2	140	APTH-12SD50	82	ATC-10	66
AEJ48773000B	28	AEP4A(R)(T)12018B(V)	20	AFRL-2-C	140	APTH-140E1	82	ATC-25	66
AEJ4884200B	28	AEP4A(R)(T)12022B(V)	20	AFRL-3	140	APTH-140E13	82	ATC-100	66
AEJ4884200B1	28	AEP4A(R)(T)22020B(V)	20	AFRL-3-C	140	APTH-140E14	82	ATC-150F	66
AEJ4885000B	28	AEP4A(R)(T)22025B(V)	20	AFRL-8	140	APTH-140E15	82	ATC-250	66
AEJ48896500B	28	AEP4A(R)(T)22030B(V)	20	AHB-3	138	APTH-140E16	82	ATC-250F	66
AEJ48898100B	28	AEP4A(R)(T)22035B(V)	20	AHB-5	138	APTH-140E17	82	ATC-500	66
AEL4A12003B(Q)	18	AEP4A(R)(T)22040B(V)	20	AHBT5-2500	77	APTH-140E18	82	ATC-500F	66
AEL4A12006B(Q)	18	AEP488X12000B	28	AHBT5-5000	77	APTH-140E19	82	ATC-750	66
AEL4A12011B(Q)	18	AEP4866250B	28	AHCTS-0.5K	74	APTH-140E21	82	ATC-750F	66
AEL4A12014B(Q)	18	AEP4866425B	28	AHCTS-1.5RDF	73	APTH-140E22	82	ATC-1800	66
AEL4A12018B	18	AEP4866625B	28	AHCTS-001K	74	APTH-140E24	82	ATDA	69
AEL4A12022B	18	AEP4866925B	28	AHCTS-1RDF	73	APTH-140E25	82	ATDA-8000	70
AEN32015C(F)(DL)	21	AEP48771200B	28	AHCTS-2.5K	74	APTH-140E27	82	ATDA-8000-10-DCA(-TA)(-TP)	70
AEN32025C(F)(DL)	21	AEP48773000B	28	AHCTS-3/4RDF	73	APTH-140E30	82	ATDA-DC	69
AEN32030C(F)(DL)	21	AEP4884200B	28	AHCTS-005K	74	APTH-140E32	82	ATDBLIS	92
AEN32040C(F)(DL)	21	AEP4884200B1	28	AHCTS-010K	74	APTH-140E34	82	ATDBRIS	92
AEN33042C(F)	21	AEP4885000B	28	AHCTS-025K	74	APTH-140E36	82	ATM-800	111
AEN33053C(F)	21	AEP48896500B	28	AHCTS-0500	74	APTH-140E38	82	ATM-1800	111
AEN33060C(F)(DL)	21	AEP48898100B	28	AHCTS-2500	74	APTH-140E41	82	ATM-2800	111
AEN33090C(F)(DL)	21	AEP-5	138	AHCTS-5000	74	APTH-140E118	82	ATM-3800	111
AEN33120C(F)(DL)	21	AE-PG7080	121	AHCTS-7500	74	APTH-140E138	82	ATM-5000	111
AEN33200C(F)(DL)	21	AES-3	138	AHCTS-5025	74	APTH-14RT34	82	ATM-8000	111
AEN33210C(F)(DL)	21	AES32010C(V)(Q)	22	AIC3-2	138	APTH-14RT50	82	ATM-12000	111
AEN33300C(F)(DL)	21	AES32020C(V)(Q)	22	AIC5-2	138	APTH-14SD50	82	ATM-16000	111
AEN33375C(F)(DL)	21	AES32025C(V)(Q)	22	AIMTS-0500	76	APTW-25	82	ATN-3	138
AEN35090B(F)	21	AES32038C(V)	22	AIMTS-2000	76	APTW-50	82	ATN-5	138
AEN35140B(F)	21	AES33040C(V)(-2)	22	AISF-200100	89	APTW-100	82	ATW-50	139
AEN35175B(F)	21	AES33060C(V)(-2)	22	AISF-200250	89	APTW-150	82	ATW-0100F	81
AEN35225B(F)	21	AES33100C(V)(-2)	22	AISF-201000	89	APTW-200	82	ATW-0200F	81
AEN35285B(F)	21	AES33150CV	22	AISI-200025	89	APTW-340	82	ATW-0500F	81
AEN35350B(F)	21	AES33230C(V)(-2)	22	AISI-200100	89	ARDFA-100(HD)(HDE)(HDS)	90	ATW-1000F	81
AEN356540A	29	AES33400C	22	AISI-200500	89	ARDFA-150(HD)(HDE)(HDS)	90	ATWL-250	78
AEN3571000A	29	AES33600C	22	AISWT-4L	65	ARDFA-250(HD)(HDE)(HDS)	90	ATWL-750	78
AEN3571600A	29	AES35075AV	22	AISWT-6L	65	ARDFA-500(HD)(HDE)(HDS)	90	ATWL-1000	78
AEN3572600A	29	AES35090AV	22	AJH-3	138	ARDFA-600(HD)(HDE)(HDS)	90	AUB-5	138
AEN4C12004B	18	AES35110AV	22	AJH-5	138	ARDFA-750(HD)(HDE)(HDS)	90	Audit Manager Software	72
AEN4C12009B	18	AES35135AV	22	AJKR-28	91	ARDIA-10(HD)(HDE)(HDS)	90	AUET-10(-DC)	67
AEN4C12014B	18	AES35170AV	22	AJKR-135	91	ARDIA-25(HD)(HDE)(HDS)	90	AUET-50(-DC)	67
AEN4C12018B	18	AES35280A	22	AJKR-271	91	ARDIA-50(HD)(HDE)(HDS)	90	AUET-0100(-DC)	67
AEN4C12022B	18	AES35350A	22	AJKR-1017	91	ARDIA-100(HD)(HDE)(HDS)	90	AUET-250(-DC)	67
AEN4C22015BM(F)	26	AES35420A	22	AJKR-1695	91	ARDIA-150(HD)(HDE)(HDS)	90	AUET-500(-DC)	67
AEN4F22030BM(F)	26	AES35515A	22	AJKS-25D	91	ARDIA-250(HD)(HDE)(HDS)	90	AUET-1000(-DC)	67
AEN4F22037BM(F)	26	AES35635A	22	AJKS-38D	91	ARDIA-350(HD)(HDE)(HDS)	90	AUET-1200(-DC)	67
AEN4F22044BM(F)	26	AES4A12003B(V)(Q)	18	AJKS-50D	91	ARDIA-500(HD)(HDE)(HDS)	90	AUET-1800(-DC)	67
AEP-3	138	AES4A12006B(V)(Q)	18	AJKS-75D	91	ARDIA-750(HD)(HDE)(HDS)	90	AUET-2500(-DC)	67
AEP35075AV(T)	20	AES4A12011B(V)(Q)	18	AJKS-100D	91	ARDIA-1000(HD)(HDE)(HDS)	90	AUET/MTM-050-25	67
AEP35090AV(T)	20	AES4A12014B(V)(Q)	18	AJS3	138	ARTIS-25H-2T(A)	88	AUET/MTM-50-250(-DC)	67
AEP35110AV(T)	20	AES4A12018BV	18	ALPHA-60SMC	54	ARTIS-25H-5T(A)	88	AUET/MTM-50-500(-DC)	67
AEP35135AV(T)	20	AES4A12022BV	18	ALPHA-70C	105	ARTIS-25H-20T(A)	88	AUET/MTM-050-600(-DC)	67
AEP35170AV(T)	20	AES4A22020BVM	26	ALPHA-70CH	105	ARTIS-25S-10T(A)	88	AUET/MTM-50-1000(-DC)	67
AEP35280A(T)	20	AES4A22025BVM	26	ALPHA-101MC	54	ARTIS-38S-75T(A)	88	AUET/MTM-0100-050(-DC)	67
AEP35350A(T)	20	AES4A22030BVM	26	AM1/4Z	145	ARTIS-50S-180T(A)	88	AUET/MTM-100-500(-DC)	67
AES4A240A(T)	20	AES4A22040BVM	26	AM3/16Z	145	ARTIS-75S-250T(A)	88	AUET/MTM-100-1000(-DC)	67
AEP35515A(T)	20	AES4A66250B	28	AMSZ	145	ARTIS-75S-500T(A)	88	AUET/MTM-100-1200(-DC)	67
AEP35635A(T)	20	AES4A66425							

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
AUET/MTM-250-1600-(DC) .	67	EC/MCCBL-30 .	56	RMA-7L .	131	UA-70SMC .	44	UDBP-AFSET .	50
AUET/MTM-250-1800-(DC) .	67	EC/MCCBL-35 .	56	RMA-15L .	131	UA-80MC .	44	UDBP-TA70(P) .	107
AUET/MTM-250-2500-(DC) .	67	EC/MCCBL-40 .	56	RMA-20L .	131	UA-90MC .	44	UDBP-TA70(P)-B .	107
AUET/MTM-500-2500-(DC) .	67	EC/MCCBL-45 .	56	RPA-1 .	131	UA-100MC .	44	UDBP-TA70(P)-KIT .	107
AVC-5 .	138	EC/MCCBL-50 .	56	RPA-2 .	131	UA-130MC .	44	UDBP-TA70(P)-RF .	107
AW3F .	138	EC/MCCBL-60 .	56	RPA-3 .	131	UA-150MC .	44	UDBP-TA70(P)-RF-B .	107
AW3FMF .	139	EC/MCCBL-75 .	56			UA-400AMC .	45	UDBP-TA70(P)-RF-KIT .	107
AW3FMS .	139	EY0L82B .	50, 106	S		UA-500AMC .	45	UDBP-TA70(P)-RF-KTR .	107
AW3S .	138	EYFB32 .	50, 106	SBH-0 .	126	UA-600AMC .	45	UDP-A60MC .	54
AW6F .	138	EYFB41 .	50, 106	SBH-1A(R,H) .	126	UA-700AMC .	45	UDP-A80MC .	54
AW6FMF .	139	EYFB50 .	50	SH-5 .	138	UA-800AMC .	45	UDP-TA40 (B) .	108
AW6FMS .	139			SIW-38PR .	115	UA-900AMC .	45	UDP-TA40 (B-TL) .	108
AW6S .	138			SIW-50PR .	115	UA-1000AMC .	45	UDP-TA40D (B) .	108
				SIW-50PR .	115	UA-1300AMC .	45	UDP-TA40D (B-TL) .	108
B				SIW-B20LI .	115	UAG-40SBL-136 .	124	UDP-TA50 (B) .	108
B23 .	142	F70 .	134	SIW-B20LI-HC .	115	UAG-50SBL-109 .	124	UDP-TA50 (B-TL) .	108
B23E .	142	F600 .	134	SIW-C18-20 .	115	UAG-50SBL-120 .	124	UDP-TA50D-B .	108
B25 .	142	F1500 .	134	SIW-P2525Q .	115	UAG-70SBL-76 .	124	UDP-TA50D (B-TL) .	108
BJ10051 .	38	F3000 .	134	SIW-P3225Q .	115	UAG-90SBL-59 .	124	UDP-TA55 (B) .	108
BJ10052 .	38	F7500 .	134	SIW-P3238 .	115	UAN-611R-30C .	109	UDP-TA55 (B-TL) .	108
BJ10053 .	38	FA-50-2 .	139	SIW-P5538 .	115	UAN-611R-40C .	109	UEC-4800 .	46
BJ10054 .	38			SIW-P5550 .	115	UAN-611R-50C .	109	UEC-4800A-ANGLE .	46
BJ10055 .	38	G - H		SIW-P10050 .	115	UAN-611R-60C .	109	UEC-4800A-EDA .	46
BJ10076 .	32	Gen IV ACE Controller .	10	SIW-P12050 .	115	UAN-701R-30C .	109	UEC-4800A-EDAL .	46
BJ10077 .	32	I		SIW-PBL .	115	UAN-701R-40C .	109	UEC-4800A-EPA .	46
BJ10078 .	32	iAC4E .	14	SMD Tools Software .	72	UAN-701R-60C .	109	UEC-4800A-EPAL .	46
BJ10082 .	117	iAC4EG .	14	SPC-2PGM .	118	UAT-30D .	101	UEC-4800A-EPL .	46
BJ10083 .	117	iAC4EGV .	14	SPC-A21025 .	116	UAT-30SD .	101	UEC-4800A-EXL .	46
BJ10091 .	115	iAC4ES .	14	SPC-A21025Q .	116	UAT-40 .	101	UEC-4800-EDA .	46
BP-T40-(B) (KIT) .	106	iAC4ESG .	14	SPC-A21038 .	116	UAT-40D .	101	UEC-4800-EPA .	46
BP-T40D-(B) (KIT) .	106	iAC4ESGV .	14	SPC-A21625 .	116	UAT-40S .	101	UEC-4800-EPAL .	46
BP-T50-(B) (KIT) .	106	iAC4ESR .	14	SPC-A21625Q .	116	UAT-40SD .	101	UEC-4800-EX .	46
BP-T50D-(B) (KIT) .	106	iAC4ESRG .	14	SPC-A21638 .	116	UAT-50 .	101	UEC-4800-EXL .	46
BP-T60-(B) (KIT) .	106	iAC4ESRGV .	14	SPC-A23038 .	116	UAT-50D .	101	UEC-4800TP .	46
BP-T60D-(B) (KIT) .	106	iAC4ESRV .	14	SPC-A23538 .	116	UAT-50DL .	101	UEC-4800TPA .	46
BRH-1USD .	126	iAC4ESV .	14	SPC-A25038 .	116	UAT-50L .	101	UEC-4800TPA-EDA .	46
BRH-1UD .	126	iAC4EV .	14	SPC-A27038 .	116	UAT-50S .	101	UEC-4800TPA-EDAL .	46
BRH-5UD .	126	iBC4E .	15	SPC-A210050 .	116	UAT-50SD .	101	UEC-4800TPA-EPA .	46
BRH-5USD .	126	iBC4EG .	15	SPC-B218LI .	117	UAT-50SDL .	101	UEC-4800TPA-EPAL .	46
BRH-7(R,H) .	126	iBC4EGV .	15	SPC-B218LI-HC .	117	UAT-50SL .	101	UEC-4800TPA-EX .	46
		iBC4EV .	15	SPC-C218-19 .	117	UAT-60 .	101	UEC-4800TPA-EXL .	46
C		iCBL-4P .	92	SPC-P2325Q .	116	UAT-60D .	101	UEC-4800TP-EDA .	46
CA150108DHD .	73	iCBL-10P .	92	SPC-P2625Q .	116	UAT-60L .	101	UEC-4800TP-EDAL .	46
CA1510 .	73	ICBL-5000L .	92	SPC-P2925Q .	116	UAT-60S .	101	UEC-4800TP-EPA .	46
CA1550 .	73	ICBL-8000DIG .	92	SPC-P21225Q .	116	UAT-60SD .	101	UEC-4800TP-EPAL .	46
CA1575 .	73	ICBL-USB .	92	SPC-P-HL .	118	UAT-60SDL .	101	UEC-4800TP-EX .	46
CA25101 .	73	iEC4E .	14	SPC-P-HL-RH .	118	UAT-60SL .	101	UEC-4800TP-EXL .	46
CA25151 .	73	iEC4EG .	14	SPC-QC .	117	UAT-70 .	101	UEC-5500 .	46
CA25751 .	73	iEC4EGV .	14			UAT-70L .	101	UECD-4800A-50 .	53
CB-13P .	126	iEC4EV .	14	T		UAT-70S .	101	UECD-4800A-60 .	53
CPSPJ73 .	85	IP4 .	134	TA-50-2 .	139	UAT-70SL .	101	UECD-4800A-70 .	53
CPSPJ75 .	85	IP5 .	134	Tool Manager Software .	71	UAT-80 .	101	UECD-4800A-100 .	53
CPSPJ81 .	85	IP7 .	134	TS-20NP-2NPT .	142	UAT-90 .	101	UECD-4800A-EDA-50 .	53
CPSKR81 .	84	IP8T .	134	TS-20US-2NPT .	142	UAT-90L .	101	UECD-4800A-EDA-60 .	53
CPSKS500 .	85	iPC4E(1)(2) .	15	TS-30NP-2NPT .	142	UAT-100 .	101	UECD-4800A-EDA-70 .	53
CPSKS550 .	84	iPC4EG(1)(2) .	15	TS-30NP-3NPT .	142	UAT-100L .	101	UECD-4800A-EDA-100 .	53
CPSKS81 .	85	iPC4EGV(1)(2) .	15	TS-30US-3NPT .	142	UAT-130 .	101	UECD-4800A-EDAL-50 .	53
CPSKS82 .	85	iPT150 .	134	TW-00 .	130	UAT-150 .	101	UECD-4800A-EDAL-60 .	53
CPSKS85 .	85	iTV375 .	134	TW-0 .	130	UAT-180 .	101	UECD-4800A-EDAL-70 .	53
CPSKS86 .	85			TW-3 .	130	UAT-200 .	101	UECD-4800A-EDAL-100 .	53
CPSKS87 .	85			TW-5 .	130	UAT-200L .	101	UECD-4800A-EPA-50 .	53
CPSKS98 .	85			TW-9 .	130	UB333Li .	107	UECD-4800A-EPA-60 .	53
CPSKT82 .	84			TW-15 .	130	UBC .	107	UECD-4800A-EPA-70 .	53
CPSKU00 .	85			TW-22 .	130	UCB-25 .	108	UECD-4800A-EPA-100 .	53
CPSKU50 .	84			TW-30 .	130	UCB-TA-CBL .	108	UECD-4800A-EPAL-50 .	53
CPSKV00 .	84			TW-40 .	130	UD-50-22 .	125	UECD-4800A-EPAL-60 .	53
CPSMH00 .	85			TW-50 .	130	UD-50-45 .	125	UECD-4800A-EPAL-70 .	53
CPSMJ00 .	85			TW-60 .	130	UD-50-200 .	125	UECD-4800A-EPAL-100 .	53
CPSPH05 .	85			TW-70 .	130	UD-50S-22 .	125	UECD-4800A-EX-50 .	53
CPSPH10 .	85			TWF-600R .	107	UD-50S-45 .	125	UECD-4800A-EX-60 .	53
CPSPH20 .	85					UD-50S-45A .	125	UECD-4800A-EX-70 .	53
CPSPH30 .	85					UD-50S-45A* .	125	UECD-4800A-EX-100 .	53
CPSPH40 .	85					UD-60-04 .	125	UECD-4800A-EXL-50 .	53
CPSPH60 .	85					UD-60-07 .	125	UECD-4800A-EXL-60 .	53
						UD-60-15 .	125	UECD-4800A-EXL-70 .	53
D						UD-60-20 .	125	UECD-4800A-EXL-100 .	53
DATAPRO + SQNET Software 87						UD-60-29 .	125	UECD-4800TPA-50 .	53
						UD-60S-15 .	125	UECD-4800TPA-60 .	53
E						UD-60S-15C .	125	UECD-4800TPA-70 .	53
EAA-04 .	133					UD-60S-29 .	125	UECD-4800TPA-100 .	53
EAP-202ASSY .	133					UD-60S-29C .	125	UECD-4800TPA-EDA-50 .	53
EAP-202ED-KIT .	133					UD-80-04 .	125	UECD-4800TPA-EDA-60 .	53
EAP-203-ASSY .	133					UD-80-07 .	125	UECD-4800TPA-EDA-70 .	53
EC/MCCBL-3 .	56					UD-80-12 .	125	UECD-4800TPA-EDA-100 .	53
EC/MCCBL-10 .	56					UDBP-AF50(P)-STA .	49	UECD-4800TPA-EDAL-50 .	53
EC/MCCBL-25 .	56					UDBP-AF50Z(P)-STA .	49	UECD-4800TPA-EDAL-60 .	53
						UDBP-AF60(P)-STA .	49	UECD-4800TPA-EDAL-70 .	53
						UDBP-AF60Z(P)-STA .	49	UECD-4800TPA-EDAL-100 .	53
						UDBP-AF70(P)-STA .	49	UECD-4800TPA-EPA-50 .	53
						UDBP-AF70Z(P)-STA .	49	UECD-4800TPA-EPA-60 .	53

INDEX

MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE	MODEL #	PAGE
UECD-4800TPA-EPA-70 . . .	53	UNR-F015-25NTC	60	US-LT60P-07	113	Numbers		28514	32
UECD-4800TPA-EPA-100 . . .	53	UNR-F015-45NT	59	US-LT60P-11	113	18594.009	31	28549	32
UECD-4800TPA-EPAL-50 . . .	53	UNR-F015-55NTC	60	UW-6CSHK	123	209P-6-4	142	28622	39
UECD-4800TPA-EPAL-60 . . .	53	UNR-F015-65NT	59	UW-6CSHRK	123	209P-8-6	142	28796	95, 141
UECD-4800TPA-EPAL-70 . . .	53	UNR-F015-200NT	59	UW-6CSK	123	222P-6-4	142	28843	23, 37
UECD-4800TPA-EPAL-100 . . .	53	UNR-F015-280NT	59	UW-6SLDK	122	222P-8-6	142	28859	38
UECD-4800TPA-EX-50	53	UNR-F015-350NT	59	UW-6SLK	122	222P-12-8	142	375-RZ	142
UECD-4800TPA-EX-60	53	UNR-F050-95NTC	60	UW-6SLRDK	122	250-RZ	142	375-SZ	142
UECD-4800TPA-EX-70	53	UNR-F050-130NTC	60	UW-6SLRK	122	250-SZ	142	30300	32
UECD-4800TPA-EX-100	53	UNR-F050-270NT	59	UW-6SSDK	122	20322	39	30303	32
UECD-4800TPA-EXL-50	53	UNR-F050-630NT	59	UW-6SSHDK	122	20400	38	30340	39
UECD-4800TPA-EXL-60	53	UNR-F050-730NT	59	UW-6SSHK	122	20712	37	30351	39
UECD-4800TPA-EXL-70	53	UNR-F050-880NT	59	UW-6SSHRDK	122	20848	37	30355	36
UECD-4800TPA-EXL-100	53	UNR-F050-1400NT	59	UW-6SSHRK	122	20853	39	30850	37
UEC-F024H	57	UNR-F100-200NTC	60	UW-6SSLK	122	21159	38	4H2055	121
UEC-F060H	57	UNR-F100-250NTC	60	UW-6SSLRDK	122	21208	39	408-088-2	112
UEC-F120H	57	UNR-F100-380NTC	60	UW-6SSRK	122	21226	38, 118, 139	408-885-0	112
UEC-F300MI	58	UNR-F100-550NTC	60	UW-85HK	122	23575	39	455-885-1	112
UEC-MKB	58	UNR-F100-1300NT	59	UW-85HRK	122	23662	39	459-885-1	112
UECP-4800A	55	UNR-F100-1900NT	59	UW-9CSK	123	23730	38	496-088-1	112
UECP-4800A-EDA	55	UNR-F100-2500NT	59	UW-9SK	122	24320	36	500-SZ	95, 142
UECP-4800A-EDAL	55	UNR-F100-3700NT	59	UW-9SRK	122	24330	36	7021	142
UECP-4800A-EPA	55	UNR-F100-5400NT	59	UW-9SSK	122	24924	39	7021AG	142
UECP-4800A-EPAL	55	UNR-F100-7000NT	59	UW-10SHK	122	25265	39	7041A	142
UECP-4800A-EX	55	UNR-F100-10000NT	59	UW-10SHRK	122	25274	32	7041AG	142
UECP-4800A-EXL	55	UOW-11-10	110	UW-13CSK	123	25275	32	7051	142
UEP-50DMC-STD	51	UOW-11-14	110	UW-13SK	122	25276	32	852-644-1 KIT	56
UEP-50MC(-STD)A	51	UOW-11-22	110	UW-13SRK	122	25277	32	852-645-1 KIT	56
UEP-60DMC(-STD)A	51	UOW-11-30	110	UW-13SSK	122	25278	32	852-669-1 KIT	56
UEP-60MC(-STD)A	51	UOW-T60-10	110	UW-61ERK	122	25289	32	863-966-1	107
UEP-70MC(-STD)A	51	UOW-T60-14	110	UW-75S	123	25291	32	863-978-1	107
UEP-80MC(-STD)A	51	UOW-T60-22	110	UW-131ERK	122	25350	36	909-921-0	56
UEP-100MC(-STD)A	51	UOW-T60-30	110	UW-140P(WR)	123	25491	36	910-546-0	56
UEPD-51A-UL	51	UP-25DB	125	UW-220P	123	25501	39	910-547-0	56
UEPD-61A-UL	51	URW-6	109	UW-220PL	123	25518	36	910-548-0	56
UEPD-71A-UL	51	URW-8	109	UW-251P	123	25646	36	910-618-0	108
UEPD-101A-UL	51	URW-8N	109	UW-381	123	25717	39	910-619-0	108
UFT-6	91	URW-9N	109	UW-381L	123	25718	39	910-623-0	56
UFT-10	91	URW-10N	109	UW-381P	123	25843	39	910-627-0	108
UFT-16	91	URW-12N	109	UW-401	122	26327	32	910-629-0	108
UFT-24	91	US-3.5ACB	114	UW-401L	122	26328	32	910-974-0	56
UFT-510	91	US-3.5B	114	UW-550	123	26332	32	910-975-0	56
UFT-516	91	US-5	114	UW-ST6SHK	123	26336	32	911-023-0	56
UG-20A-120	124	US-6W	114	UX-450	104	26337	32	932-100-0	142
UG-20A-200	124	US-350PW	114	UX-450D	104	26364	36	932-110-0A	142
UG-25NA	124	US-450PW	114	UX-450S	105	26394	39	934-150-0	112
UG-38N	124	US-450WB	114	UX-450SD	105	26443	39	934-201-0	112
UG-38NA	124	US-652PW	114	UX-500	104	26477	32	10C-840-1	106
UG-38NL	124	US-LD40P-08	114	UX-500C	105	26478	32	10E-840-1	106
UG-38NS	124	US-LD40P-15	114	UX-500D	104	26479	32	863-991-1	50
UG-45H	124	US-LD40P-21	114	UX-500S	105	26568	39	910-395-0	50
UG-50S-200	124	US-LD50P-05	114	UX-500SD	105	26570	39	26840	32
UG-50S-200A	124	US-LD50P-08	114	UX-612	105	26594	36	30306	32
UG-60S-29	124	US-LD50P-17	114	UX-612D	104	26630	32		
UG-65EB	124	US-LT10B	112	UX-612S	105	26700	36		
UG-65EBL	124	US-LT20B-10	112	UX-612SD	105	26709	36		
UG-650EL	124	US-LT20B-18	112	UX-700	104	26800	32		
UG-1250L-72	124	US-LT30B-11	112	UX-700C	105	26810	32		
UGW-6N	110	US-LT30B-11C	113	UX-700S	105	26815	32		
UGW-8N	110	US-LT30B-17	112	UX-700SD	105	26820	32		
UL-30	102	US-LT30B-17C	113	UX-800	104	26830	32		
UL-30D	102	US-LT30B-23	112	UX-800C	105	26885	32		
UL-30S	102	US-LT30BL-11	113	UX-800S	105	26890	32		
UL-30SD	102	US-LT30BL-17	113	UX-900	104	26934	36		
UL-40	102	US-LT31PB-05	113	UX-900S	105	27045	32		
UL-40D	102	US-LT31PB-11	113	UX-1000	104	27110	36		
UL-40S	102	US-LT31PB-17	113	UX-1000C	105	27115	36		
UL-40SD	102	US-LT31PB-23	113	UX-1000S	105	27122	36		
UL-50	102	US-LT40-03C	113	UX-1300	104	27200	32		
UL-50D	102	US-LT40-05C	113	UX-1300S	105	27210	36		
UL-50S	102	US-LT40-08C	113	UX-1400	104	27255	32		
UL-50SD	102	US-LT40B-03C	113	UX-1620	104	27348	36		
UL-60	102	US-LT40B-05C	113	UXR-1820	104	27370	36		
UL-60D	102	US-LT40B-08	112	UXR-1820MC	54	27594	39		
UL-60S	102	US-LT40B-08C	113	UXR-2000	104	27768	95		
UL-60SD	102	US-LT40B-15	112	UXR-2000S	105	27769	95		
UL-70	102	US-LT40B-15C	113	UXR-2400S	105	27771	95		
UL-70S	102	US-LT40B-21	112	UXR-2400SMC	54	27791	39		
UL-80	102	US-LT40BL-08	113	UXR-3000S	105	27816	39		
UL-90	102	US-LT40BL-15	113	UXR-T1820	103	28050	31		
UL-100	102	US-LT41PB-08	113	UXR-T2000	103	28161	95		
UL-130	102	US-LT41PB-15	113	UXR-T2400S	103	28162	95		
UL-150	102	US-LT50B-05	112	UXR-T3000S	103	28163	95		
ULT-40C	103	US-LT50B-08	112	UX-ST800	104	28164	95		
ULT-50C	103	US-LT50B-17	112	UX-T700L	103	28178	93, 140		
ULT-60C	103	US-LT51PB-05	113			28292	36		
ULT-70C	103	US-LT51PB-08	113			28475	39		
ULT-70CH	103	US-LT51PB-17	113			28480	31		
ULT-150	103	US-LT60P-03	113			28489	38		
ULT-180	103								
				W - Z					
				WSCH	138				

[illegible]

NOTES

[illegible]

AIMCO CORPORATE HEADQUARTERS

10000 SE Pine Street
Portland, Oregon 97216
Phone: (503) 254-6600
Toll Free: 1-800-852-1368

AIMCO CORPORATION DE MEXICO SA DE CV

Ave. Cristobal Colon 14529
Chihuahua, Chihuahua. 31125
Phone: (01-614) 380-1010
Fax: (01-614) 380-1019

AIMCO EUROPE

Dibao Plaza Avenida Río Gallo, 431
19174 Galápagos - Guadalajara
Spain
Phone: +34 673 34 99 25

AIMCO CHINA

Room 607, No. 3998 Hongxin Rd
Minhang District, Shanghai
China
Phone: 0086-21-34319246
Fax: 0086-21-34319245

AIMCO SOUTH AMERICA

Calle Congreve No 800. Escobar
El Aromo. L207
Provincia de Buenos Aires
Argentina
CP: 1625
Phone: +54 9 11 3341 0543

AIMCO SOUTH KOREA

B-1213, 167, Songpa-Daero
Songpa-Gu, Seoul 05800
South Korea
Phone: 0082-2-2054-8930
Cell: 0082-10-9804-8905



www.AIMCO-GLOBAL.com